



REGULAR PLANNING COMMISSION MEETING AGENDA
Wednesday, June 14, 2023 5:00 PM
City Council Chambers, Elks Civic Building - 107 S. Cascade Ave.

The Montrose Planning Commission is pleased to have residents of the community take time to attend Planning Commission Meetings. We encourage your attendance and participation. Individuals wishing to be heard during public hearing proceedings are encouraged to be prepared and will generally be limited to three minutes to allow everyone the opportunity to be heard. The 11:00 p.m. rule will be enforced in accordance with City of Montrose Regulations (Sec. 7-15-2).

Additional written comments are welcome. If you would like to comment on an agenda item, please email planningmail@cityofmontrose.org. Written comments must be received by noon one week prior to the meeting in order to be included in the Planning Commission packet. After that deadline, comments received by noon the day prior to the meeting will be distributed to the Planning Commission on the meeting day.

Hearing assistance devices are available for public use. Please let us know if you need accommodation. The City also offers interpretation for Spanish speakers. In order to allow time to book this resource, please email planningmail@ci.montrose.co.us at least three days before the meeting.

- 1) Planning Commission meeting called to order
- 2) Roll call by the Planning Commission Chair
- 3) Approval of Minutes of the May 24, 2023 Planning Commission meeting
- 4) Additions or Deletions
- 5) **THE PINES AT OXBOW CROSSING PARKING VARIANCE** This is an application for a variance to the Large Retail Site Development standards that requires at least 40% of parking to be located in the rear or side of the building. This variance would allow for all parking to be located between the street and the front facade.
- 6) **THE PINES AT OXBOW CROSSING LARGE RETAIL SITE DEVELOPMENT** This is an application for a site development known as The Pines at Oxbow Crossing, a mixed-use office-residential development in the Oxbow Crossing Subdivision. Due to a plat note on the Oxbow Crossing plat, all developments in Oxbow Crossing, regardless of size or use, are required to be approved by the Planning Commission.
- 7) Other Business
- 8) Next Meeting will be June 28, 2023
- 9) Motion to Adjourn



**AGENDA DE REUNIONES ORDINARIAS DE LA COMISION
DE PLANEACION**

Miércoles 14 de Junio del 2023 5:00 PM

Despachos del Ayuntamiento, Edificio Cívico Elks - Ave. Cascada Sur #107.

La Comisión de Planeación de Montrose se complace en que los residentes de la comunidad se tomen el tiempo para asistir a las reuniones de la Comisión de Planeación. Alentamos su asistencia y participación. Se alienta a las personas que deseen ser escuchadas durante los procedimientos de audiencia pública a estar preparadas y, por lo general, se limitarán a tres minutos para permitir que todos tengan la oportunidad de ser escuchados. La regla de las 11:00 p.m. se aplicará de acuerdo con el reglamento de la Ciudad de Montrose (Sec. 7-15-2).

Los comentarios adicionales por escrito son bienvenidos. Si desea comentar sobre un tema de la agenda, envíe un correo electrónico a: planningmail@cityofmontrose.org. Los comentarios por escrito deben recibirse antes del mediodía una semana antes de la reunión para ser incluidos en el paquete de la Comisión de Planeación. Después de ese plazo, los comentarios recibidos antes del mediodía del día anterior a la reunión se distribuirán a la Comisión de Planeación el día de la reunión.

Los dispositivos de asistencia auditiva están disponibles para uso del público. Por favor, avísenos si necesita algún otro tipo de asistencia específica. La ciudad también ofrece interpretación para hispanohablantes. Para dar tiempo a reservar este recurso, envíe un correo electrónico a planningmail@ci.montrose.co.us al menos tres días antes de la reunión.

- 1) Se declara abierta la sesión de la Comisión de Planeación.
- 2) Pase de Lista por parte de la Secretaria Municipal.
- 3) Aprobación de las Minutas de la Reunión de la Comisión de Planeación del día 24 de mayo del 2023.
- 4) Adiciones y Sustituciones.
- 5) **VARIACION DEL ESTACIONAMIENTO DE “THE PINES AT OXBOW CROSSING”** Esta es una solicitud para una variación a los estándares de desarrollo de sitios comerciales grandes que requiere que al menos el 40% del estacionamiento esté ubicado en la parte trasera o lateral del edificio. Esta variación permitiría que todo el estacionamiento se ubique entre la calle y la fachada frontal.
- 6) **DESARROLLO DE GRANDES SITIOS COMERCIALES EN “THE PINES AT OXBOW CROSSING”** Esta es una solicitud para un desarrollo del sitio conocido como “The Pines at Oxbow Crossing”, una urbanización de uso mixto oficina-residencial en la subdivisión de Oxbow Crossing. Debido a una nota en el plano catastral del Oxbow Crossing, todas las urbanizaciones en Oxbow Crossing, independientemente de su tamaño o uso, deben ser aprobados por la Comisión de Planeación.



- 7) Otros Asuntos
- 8) La siguiente reunión será el día 28 de junio del 2023.
- 9) Moción de Clausura.



The Montrose City Planning Commission held a meeting on May 24, 2023 at 5:00 p.m. in City Hall Council Chambers. The meeting agenda was posted in accordance with the Colorado Open Meetings Act (C.R.S. §24-6-401, et.seq.).

Planning Commissioners Present: David Fishering (Chair), Chad Huffman (Vice-Chair), Steve Ball, Ronald Cairns (alternate), Jan Chastain, and Richard Rogers. Absent: Delphine Jadot, Phoebe Benziger.

Staff Members Present: William Reis (Planner I), Chris Dowsey (Assistant City Attorney), Scott Murphy (City Engineer), Sharon Dunning (Building Services Technician).

There were 4 members of the public in attendance.

CALL TO ORDER

Chairperson David Fishering called the meeting to order at 5:00 p.m.

APPROVAL OF MINUTES

Jan Chastain moved to approve the minutes of the May 10, 2023 meeting as submitted. Ron Cairns seconded, and the motion carried unanimously.

ADDITIONS OR DELETIONS

None.

ALPINE FLORAL CONDITIONAL USE PERMIT.

This application is a request to allow a retail business within the "OR" Office-Residential District at 1301 N 2nd St. Under the "OR" zoning regulations, retail sales and services establishments which cater to the general shopping public are considered a conditional use. The applicant is Alpine Floral, Inc.

Staff Presentation

William Reis introduced this item. All public requirements have been fulfilled and the official files and exhibits have been entered into the record.

Applicant Presentation

Stephanie and Tomas Keller, applicants, came forward to describe their business.

Questions for Applicant

Planning Commissioners and applicant discussed pick-up and delivery services for the business.

Questions for Staff

Planning Commissioners and staff discussed traffic, roadway access and safety.

Public Hearing

Two members of the public came forward. One member had concerns about North 2nd Street and who would pay for improvements to the street. The other member of the public came forward with concerns for herself as well as her neighbor, about traffic and turn lanes, safety, customer trucks and trailers, and effects of additional businesses on the residential neighborhood.

Discussion

The applicants returned to the podium to address customer traffic questions.

Motion and Vote

Ron Cairns moved to approve the request to allow the conditional use of a retail sales and services establishment within the “OR” Office-Residential District, located at 1301 N 2nd St. The request meets the Code criteria based on the evidence and testimony presented at this hearing and as outlined in the staff report. Richard Rogers seconded. The question was raised whether the motion should state it be for this business only. The motion failed.

Chad Huffman moved to approve the request to allow the conditional use of a retail sales and services establishment of Alpine Florist and Wedding Rental activities within the “OR” Office-Residential District, located at 1301 N 2nd St. The request meets the Code criteria based on the evidence and testimony presented at this hearing and as outlined in the staff report. Jan Chastain seconded, and the motion passed unanimously.

OTHER BUSINESS

None.

NEXT MEETING

The next Planning Commission meeting is to be determined.

PUBLIC COMMENT

None.

ADJOURNMENT

Ron Cairns moved to adjourn the meeting. Richard Rogers seconded, and the meeting ended at 5:43 p.m.

Chairperson

Attest



CITY OF MONTROSE

Planning Services

MEMO

TO: Planning Commission
FROM: William Reis, Planner II
DATE: June 14, 2023
RE: The Pines at Oxbow Crossing Variance and Large Retail Site Development
ATTACHMENTS:

- Exhibit A: Maps
- Exhibit B: Site Plan
- Exhibit C: Photos

Public notice requirements have been fulfilled in accordance with Section 11-4-3(D) of the City of Montrose Municipal Code. A sign was posted on the property, letters sent to property owners within 300 feet, and an ad appeared in the Montrose Daily Press.

Planning Commission Consideration:

The Planning Commission is providing a recommendation for the large retail site development and variance applications for The Pines at Oxbow Crossing. The Planning Commission will consider all of the information in this memo in making a decision. There will be two separate motions for this project.

Application Background:

This project is a review of the large retail site development standards for a proposed mixed-use development in the Oxbow Crossing Subdivision. Large retail site development applications are required when proposed retail locations are over 10,000 square feet in size. This proposed building is required to undergo the large retail site development standards due to a plat note on the Oxbow Crossing Subdivision subjecting all buildings to the large retail site development standards, regardless of size or use. The variance request asks to waive components of Section 11-8-9(E), requiring at least 20 percent of parking to be located to the side or rear of the building. As per Subsection N, variances may be granted by the Planning Commission. The project is located on Lots 5 and 6 of the Oxbow Crossing Subdivision, northwest of the intersection of Woodgate Rd and Oxbow Dr. The applicant must complete an amended plat application in order to remove the boundary line between these lots.

Applicant: The Pines at Oxbow Crossing, LLC

Staff Analysis:

1. Variances shall be granted only if the following criteria are met:
 - (1) The variance will not adversely affect the public health, safety and welfare.
 - (2) Unusual physical circumstances shall exist, such as unusual lot size or shape, topography or other physical conditions peculiar to the site which make it infeasible to develop or use the site in conformity with the provisions of this Chapter.
 - (3) The unusual circumstances have not been created as a result of the action or inaction of the applicant, other parties in interest with the applicant, or predecessor in interest.
 - (4) The variance requested represents the minimum variance that will afford relief and allow for reasonable use of the property.
 - (5) The variance will not result in development incompatible with other property or buildings in the area, and will not affect or impair the value or use or development of other property.
 - (6) An alternative site planning and building design approach has been submitted which substantially meets the objectives of the standards and regulations as provided herein.
2. The Variance does not appear to be adverse to the public health, safety and welfare, and is consistent with Municipal Code requirements and the City of Montrose Comprehensive Plan.
3. The site plan shall comply with the following requirements:
 - (A) The following standards shall apply to large retail developments within the City. These standards shall apply to all projects or developments for retail establishments of more than 10,000 square feet of gross floor area.
 - (B) The regulations of this Section shall apply to the entire building, lot, parcel or contiguous lots or parcels that constitute a singular site development.
 - (C) No building permit for new construction of large retail establishments, or additions to existing retail establishments which would increase the gross square feet of floor area by 50 percent or more and result in the creation of a large retail establishment, shall be approved unless a site development plan for large retail establishment has been reviewed and approved by the City in accordance with the review process as defined herein.

- (D) A large retail development shall comply with the following architectural requirements:
- (1) Facades greater than 100 feet in length, measured horizontally, shall incorporate wall plan projections or recesses having a depth of at least three percent of the length of the facade and extending at least 20 percent of the length of the facade.
 - (a) No uninterrupted length of any facades that face public streets shall exceed 100 horizontal feet.
 - (b) Ground floor facades that face public streets shall have arcades, display windows, entry areas, awnings, or other such features comprising no less than 60 percent of their horizontal length.
 - (c) Building facades shall include color changes and texture changes as more specifically set forth in Subsection (3) below. For the purpose of these provisions, the term "facade" means the portion of any exterior elevation on the building extending the entire length of the building.
 - (2) Roofs shall be designed to include parapets to conceal flat roofs and rooftop equipment such as HVAC units. Roofs shall be designed with sloped planes and overhanging eaves as more specifically set forth in Subsection (4) below.
 - (3) Buildings should have architectural features and patterns that provide visual interest, promote pedestrian traffic, and reduce massive aesthetic effects. Toward these objectives, building facades shall include the elements listed below, and as depicted in Figures 8.1 and 8.2.
 - (a) A repeating pattern that includes no less than three of the following, at repeated intervals of no more than 30 feet horizontally or vertically:
 - (i) Color change;
 - (ii) Texture change;
 - (iii) Material module change;
 - (iv) An expression of architectural or structural bays through a change in plane no less than 12 inches in width, such as an offset, reveal or projecting rib, as depicted in Figure 8.3.

Evergreen trees shall be planted at intervals of no greater than 20 feet.

Figure 8.1

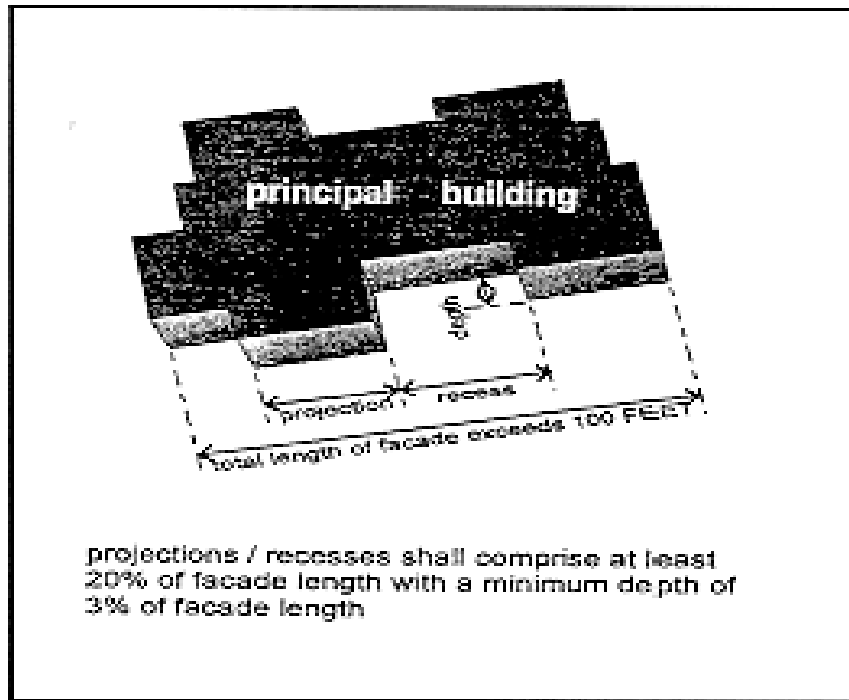


Figure 8.2



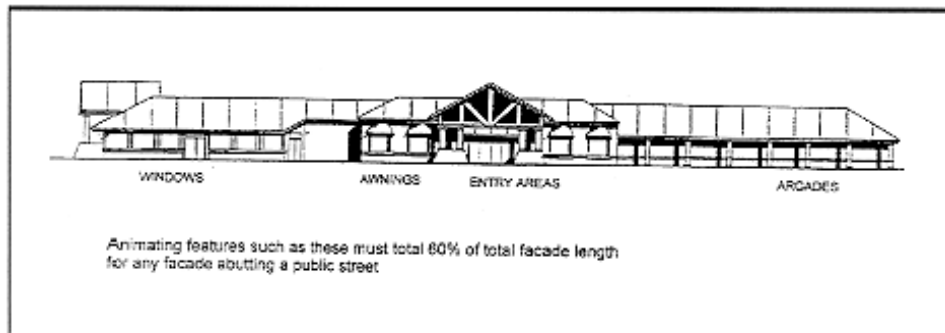


Figure 8.3

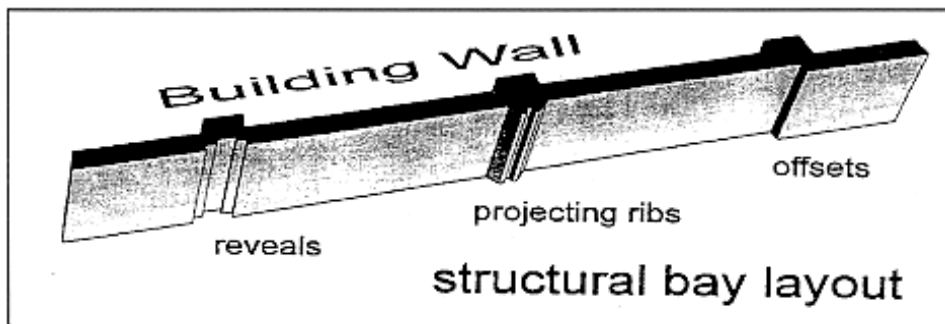

- (4) *Roof Lines.* Variations in rooflines should be used to add interest to, and reduce the massive scale of large buildings. Toward these objectives, roofs shall have at least two of the following features:
- (a) Parapets concealing flat roofs and rooftop equipment such as HVAC units from public view. The term "parapets" means those portions of the wall that extend above the roofline. The average height of such parapets shall not exceed 15 percent of the height of the supporting wall and such parapets shall not at any point exceed one-third of the height of the supporting wall. Such parapets shall feature three - dimensional cornice treatments. These elements are illustrated in Figure 8.4.
 - (b) Overhanging eaves, extending no less than three feet past the supporting walls for no less than 30 percent of building perimeter.
 - (c) Sloping roofs that do not exceed the average height of the supporting walls, with an average slope greater than or equal to one foot of vertical rise for every one foot of horizontal run.
 - (d) Three or more roof slope planes.

Figure 8.4

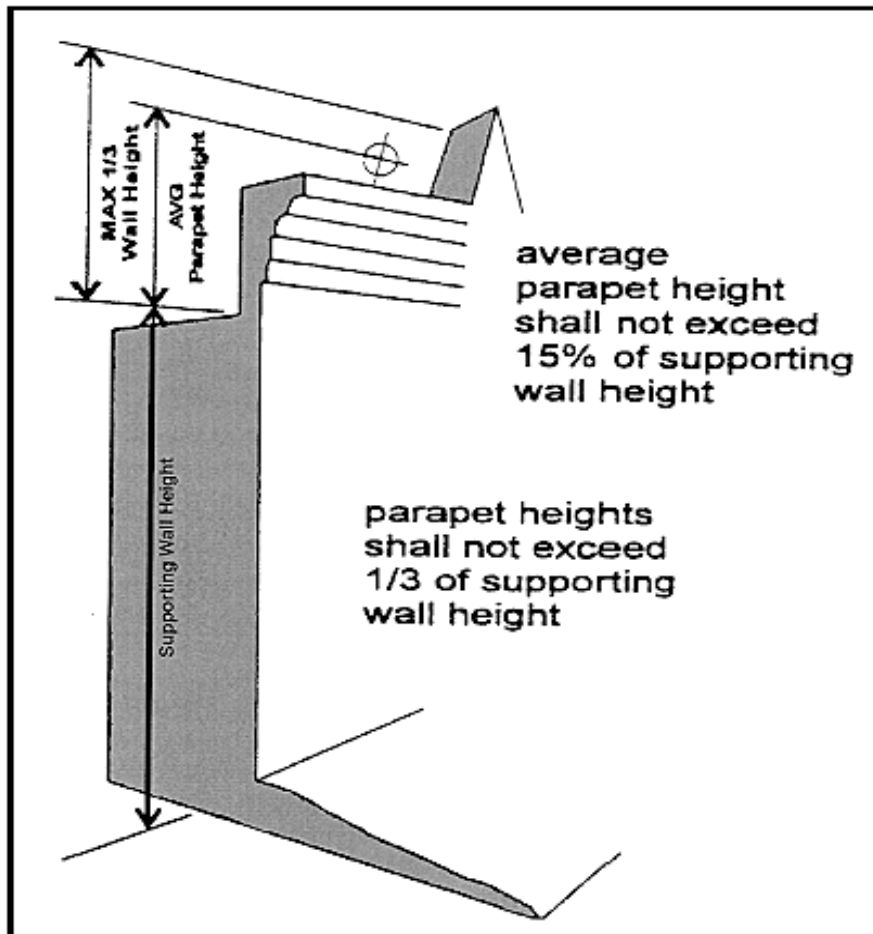

(5) *Materials and Colors.*

- (a) Exterior building materials and colors comprise a significant part of the visual impact of a building. The aesthetic effect should be compatible with the surrounding landscape. Predominant exterior building materials shall be high quality materials, and include, without limitation, brick, wood, sandstone, other native stone, and tinted, textured concrete masonry units.
- (b) Facade colors shall be of low reflectivity, and shall be subtle, neutral, or earth tone colors. The use of high intensity colors, metallic colors, black or fluorescent colors is prohibited.
- (c) Building trim and accent areas may feature brighter colors, including primary colors, but neon tubing shall not be allowed for such purposes.
- (d) Predominant exterior building materials shall not include smooth-faced concrete units, tilt-up concrete panels, or pre-fabricated steel panels.

(6) *Entryways.* Entryway design elements and variations should give orientation and aesthetically pleasing character to the building. Toward these objectives, each principal building on a large retail site shall have clearly defined, highly visible customer entrances featuring no less than three of the following:

- (a) Canopies or porticos;
- (b) Overhangs;
- (c) Recesses and/or recessions;
- (d) Arcades;
- (e) Raised corniced parapets over the door;
- (f) Peaked roof forms;
- (g) Arches;
- (h) Outdoor patios;
- (i) Display windows;
- (j) Architectural details such as tile work and moldings that are integrated into the building structure and design;
- (k) Integral planters or wing walls that incorporate landscaped areas and/or places for sitting.

(E) A large retail development shall comply with the following off-street parking requirements:

- (1) Off-street parking shall be designed so that no more than 60 percent of the total off-street parking for the site devoted to the large retail establishment is located between the front facade of the large retail establishment and the abutting street, unless all of the conditions and standards set forth in Subsection (A) of this Section are met;

- (2) Up to 80 percent of the total off-street parking for the site devoted to the large retail establishment may be located between the front facade of said establishment and the abutting street, when the City determines that all design standards set forth below have been met:
 - (a) Landscaping shall be increased to 12 percent of the large retail establishment's site, not including areas of the site occupied by building footprints; and
 - (b) Two- to four-foot undulating berms shall be provided directly adjacent to a minimum of 80 percent of the parking lot boundaries that abut public streets; and
 - (c) Every third parking aisle shall be provided with a continuous eight-foot dedicated pedestrian path through the parking lot. Unless specifically stated otherwise in a plat note or agreement with the City, maintenance of said pedestrian path shall be the responsibility of the owner or occupant of the large retail site.
- (F) Any retail establishment or development having greater than 25,000 square feet of gross floor area shall be subject to a 35-foot setback from the establishment's or development's facade to the nearest property line.
- (G) Where the large retail establishment adjoins residential uses, an earthen berm, no less than six feet in height, containing evergreen trees so as to provide effective visual screening of the establishment, shall be provided.
- (H) Areas for outdoor storage, truck parking, trash collection, loading or other such uses shall be effectively screened from abutting streets and adjoining residential neighborhoods.
 - (1) Appropriate locations for loading and outdoor storage areas shall include areas between buildings, where more than one building is located on a large retail site and such buildings are not more than 40 feet apart, or on those sides of buildings that do not have customer entrances.
 - (2) No areas for outdoor storage, trash collection or compaction, loading or other such uses shall be located within 20 feet of any public street, public sidewalk, or internal pedestrian walkway.
 - (3) Loading docks, truck parking, outdoor storage, utility meters, HVAC equipment, trash collection, trash compaction, and other service functions shall be incorporated into the overall design of the building and the large retail site development so that the visual and acoustic impacts from those functions are fully contained and out of view from adjacent properties and public streets, and shall be made of the same materials as the principal building structure.
 - (4) Non-enclosed areas for the storage and sale of seasonal inventory shall be permanently defined and screened with walls and fences. Materials, colors, and designs of screening walls and/or fences, as well as the cover, shall conform to those used as predominant materials and colors of the building.

- (5) The applicant for the large retail site development shall submit evidence that sound barriers between all areas for delivery and/or loading operations effectively reduce noise emissions to a level of 45 dB, as measured at the lot line of any adjoining property. No delivery, loading, trash removal or compaction, or other such operations shall be permitted between the hours of 10:00 p.m. and 7:00 a.m. unless the aforementioned standard is met.
- (6) Outdoor vending machines shall be screened from adjoining properties and/or public streets.
- (I) Sidewalks at least six feet in width shall be provided along all sides of the site that abuts a public street. Continuous internal pedestrian sidewalks, no less than six feet in width shall be provided from those sidewalks along public streets to the principal customer entrance. Sidewalks no less than eight feet in width shall be provided along the full length of the building along any facade featuring a customer entrance, and along any facade abutting parking areas. All sidewalks shall remain unobstructed.
 - (1) Required internal pedestrian walkways shall provide weather protection features such as awnings or arcades within 30 feet of all customer entrances.
 - (2) All internal pedestrian walkways shall be distinguished from driving surfaces through the use of durable, low maintenance surface materials such as pavers, bricks or scored concrete to enhance pedestrian safety and comfort, as well as the attractiveness of the development.
- (J) Bicycle racks shall be provided with each large retail development, with a capacity of bicycle space as calculated by one space for each ten automobile parking spaces.
- (K) Each large retail development shall provide a minimum of one transit stop, which may be incorporated into a pedestrian plaza. The transit stop should provide easy accessibility to transit vehicles and provide the following elements, at a minimum:
 - (1) Three seating benches. Two-thirds of the total seating shall be located indoors; one-third shall be located in an outdoor seating area, which shall be enclosed on three sides.
 - (2) Pick-up/drop-off area.
 - (3) Defined curb pull-out/parking lane for transit vehicles, a minimum of 50 feet in length.
 - (4) The transit stop area shall be dedicated to that purpose, and not utilized for storage or display of merchandise.
- (L) All outdoor and exterior lighting shall comply with Chapter 11-9 of this Title.
- (M) All required improvements shall be maintained in good repair and safe condition. Violation of this provision is hereby declared to be a nuisance which may be abated by the City in any lawful manner.
- (N) Variances by the Planning Commission may be granted from the requirements of this Section if it determines that all of the criteria below are met:

- (1) The variance will not adversely affect the public health, safety and welfare.
- (2) Unusual physical circumstances shall exist, such as unusual lot size or shape, topography or other physical conditions peculiar to the site which make it infeasible to develop or use the site in conformity with the provisions of this Chapter.
- (3) The unusual circumstances have not been created as a result of the action or inaction of the applicant, other parties in interest with the applicant, or predecessor in interest.
- (4) The variance requested represents the minimum variance that will afford relief and allow for reasonable use of the property.
- (5) The variance will not result in development incompatible with other property or buildings in the area, and will not affect or impair the value or use or development of other property.
- (6) An alternative site planning and building design approach has been submitted which substantially meets the objectives of the standards and regulations as provided herein.

The burden shall be on the applicant to show that these criteria have been met. The review procedures as set forth in Section 11-7-13 of this Title shall apply.

- (O) Any use, parcel, building or structure which at the effective date of the ordinance from which this Section is derived or at the time of annexation, if annexed subsequent to the effective date of the ordinance from which this Section is derived, was lawfully existing and maintained in accordance with the previously applicable county or City regulations and ordinances but which does not conform or comply with the regulations as provided in this Section, may continue to be maintained and used as a lawful nonconforming use only in compliance with the provisions and limitations imposed by Section 11-7-11(C) of this Title. Uses, parcels, structures or buildings which were unlawful or illegal and not in compliance with previously applicable regulations shall remain unlawful, illegal, and subject to abatement or other enforcement action.

4. Staff finds that the criteria have been met (pending the variance to Section 3d in this staff report). The large retail site development application complies with Section 4-1-16.

Staff Recommendation:

The staff finds that the criteria have been met, and recommend approval of the request.

Planning Commission Motion Alternatives:

Approval Motion Recommendation (Variance):

"I hereby make a motion to approve the request to allow the variance to waive the parking requirements prohibiting the placement of all parking between the front façade and the abutting street for The Pines at Oxbow Crossing. The request meets the Code criteria and standards based on the evidence and testimony presented at this hearing and in the staff report."

Denial Motion Recommendation:

"I hereby make a motion to deny the request. The request does not meet the Code criteria based on the evidence and testimony presented at this hearing and in the staff report."


Conditional Approval Motion Recommendation (Large Retail Site Development):

"I hereby make a motion to approve the request to approve the large retail site development plan for The Pines at Oxbow Crossing, conditioned on the recording of the Oxbow Crossing Subdivision 4th Amended Plat. The request meets the Code criteria and standards based on the evidence and testimony presented at this hearing and in the staff report."

Denial Motion Recommendation:


"I hereby make a motion to deny the request. The request does not meet the Code criteria based on the evidence and testimony presented at this hearing and in the staff report."

EXHIBIT A: Maps
Location and Notification Map

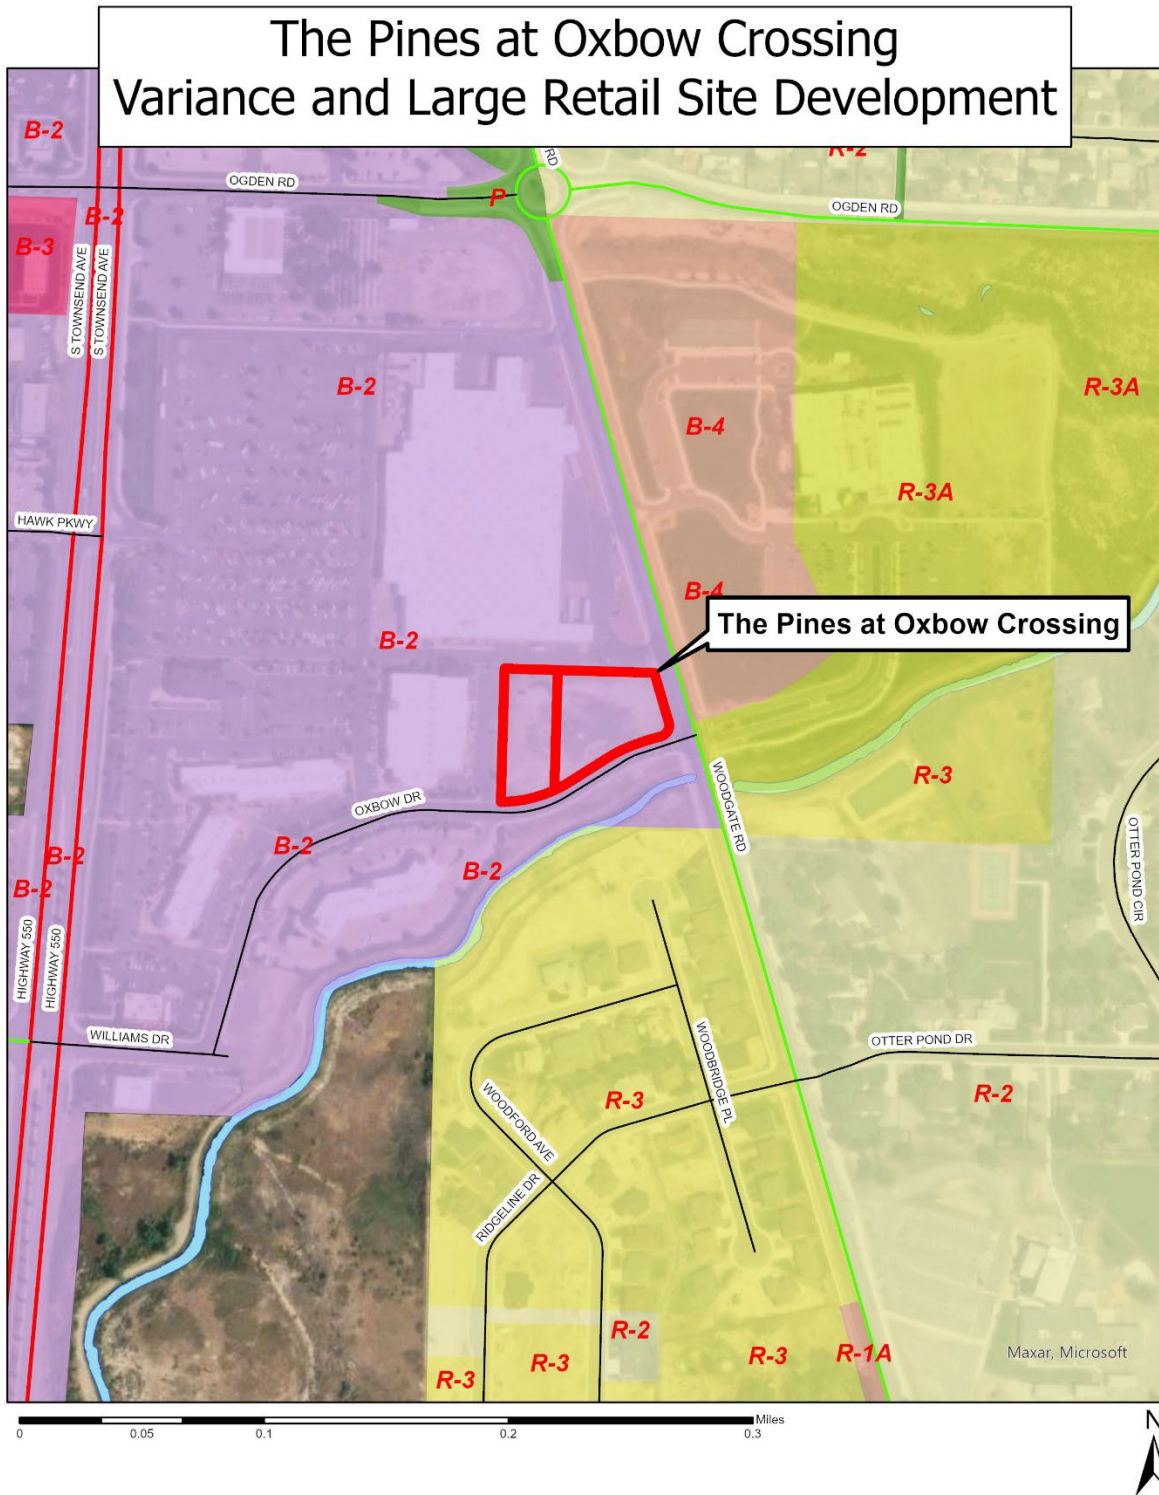

THE PINES AT OXBOW CROSSING

CIVIL SITE APPLICATION PLANS

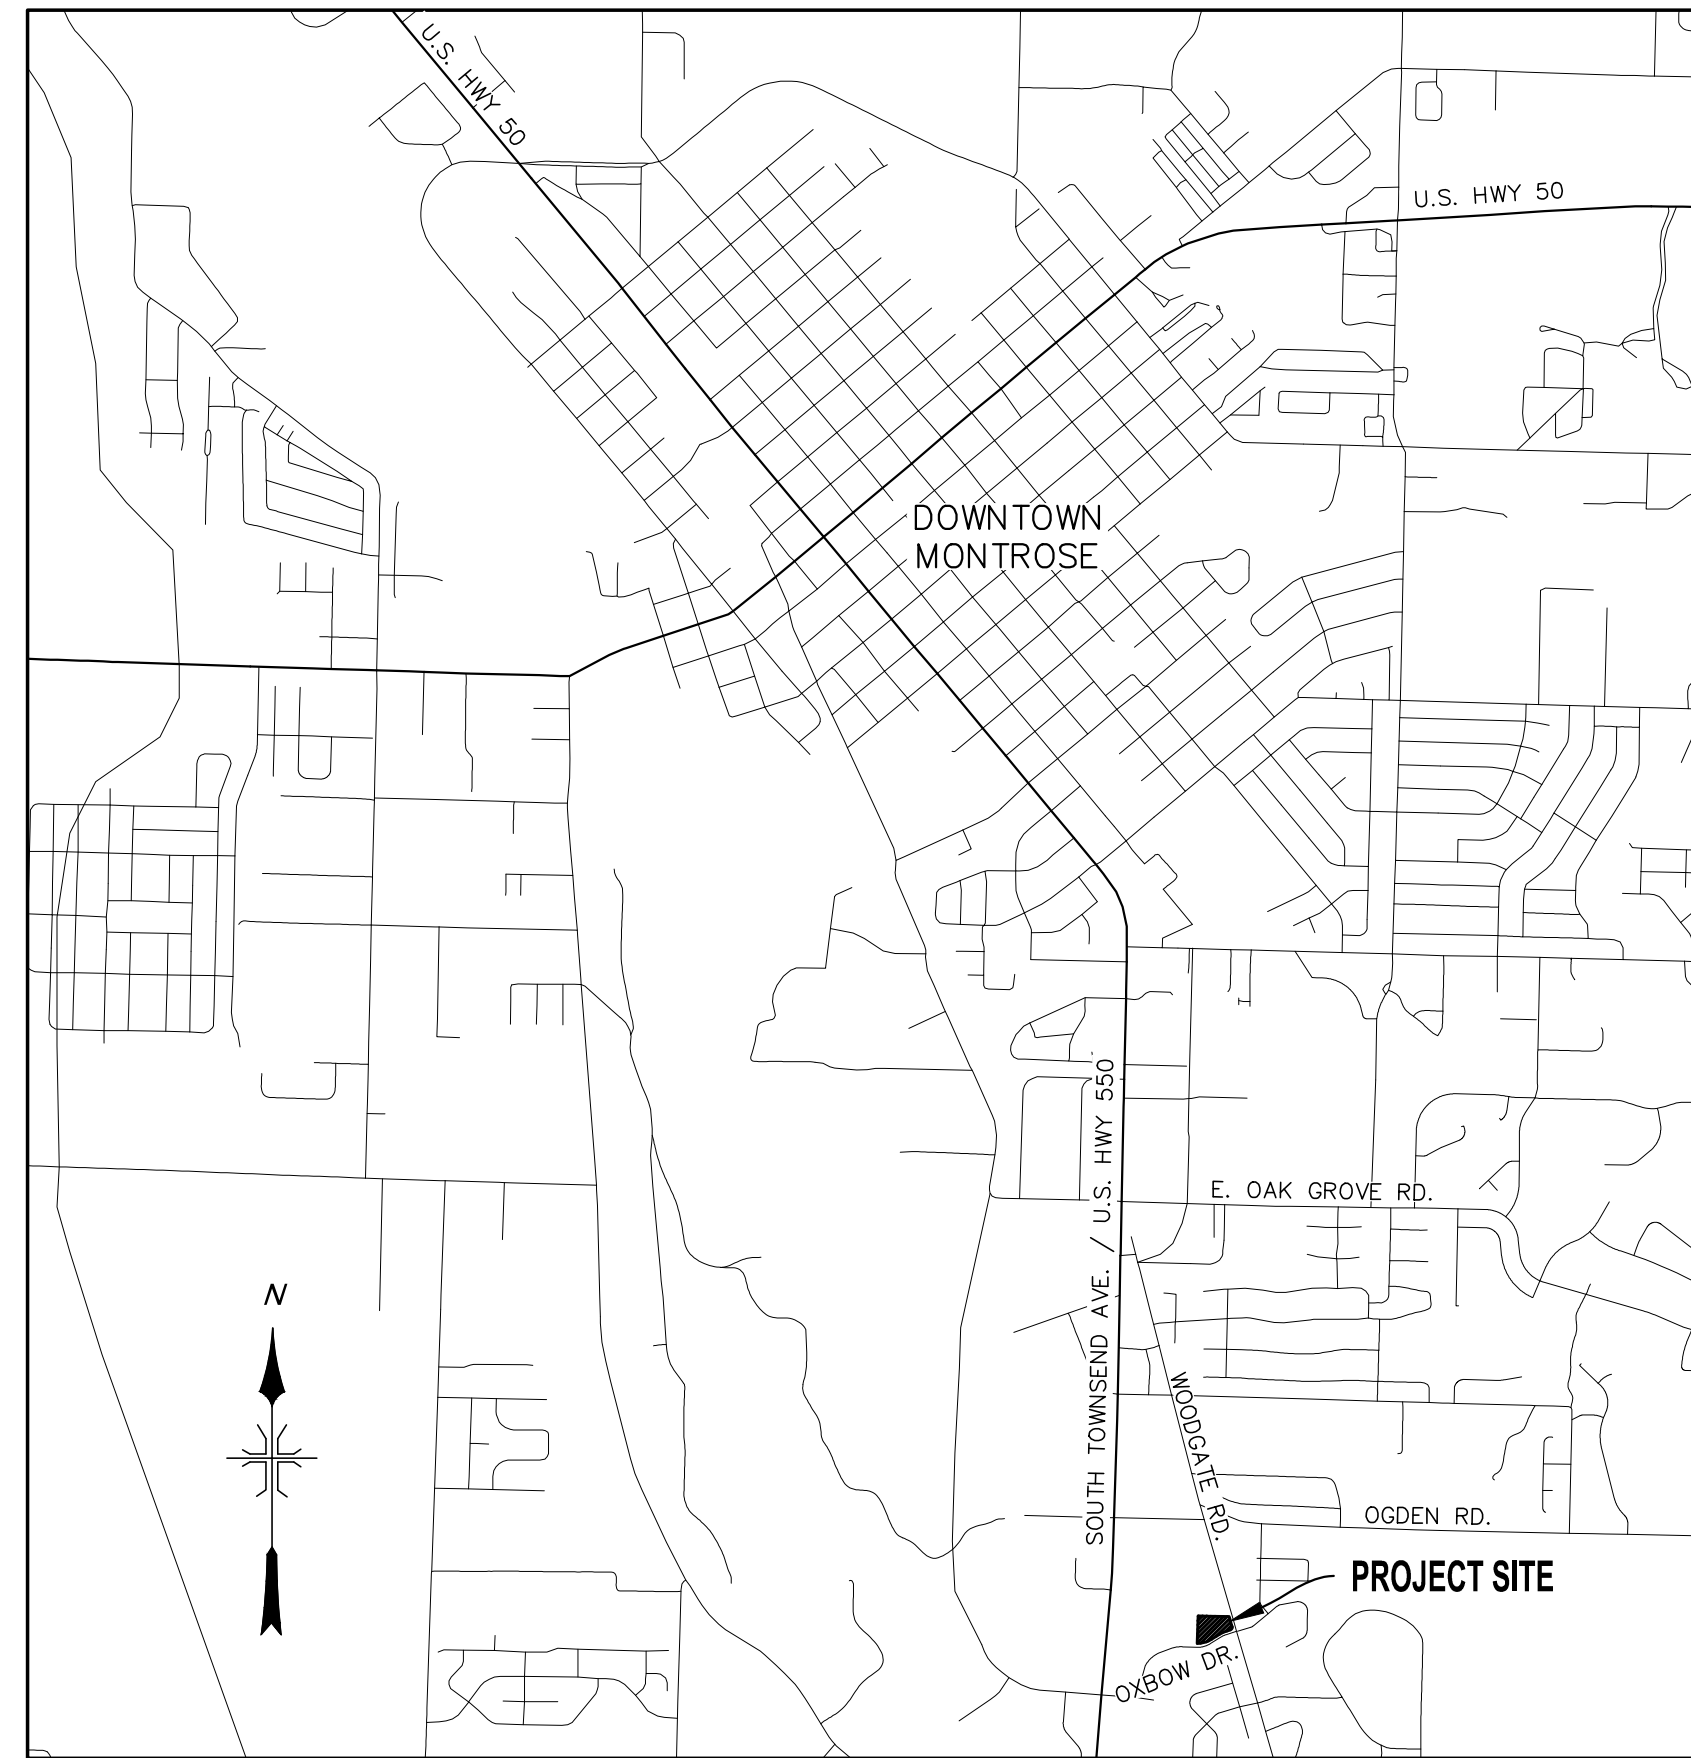

VICINITY MAP
N.T.S.

UTILITY CONTACTS				
Utility	Owner	Contact	Phone	Email
Natural Gas	Black Hills Energy	Scott Hunter	(970) 596-1924	Scott.Hunter@blackhillscorp.com
Telephone	Century Link	Richard Strohm	(970) 249-8983	richard.strohm@centurylink.com
Cable/Fiber	Charter	Arthur Valdez Jesse Gross	(970) 210-2550 (970) 316-1023	Arthur.Valdez@charter.com Jesse.Gross@charter.com
Power	DMEA	Shelby Bear	(970) 240-1238	Sbear@dmea.com
Fiber	Elevate	Austin French	(970) 240-6873	Austin.french@elevatefiber.com
Water	City of Montrose	Scott Murphy	(970) 901-1792	smurphy@ci.montrose.co.us
Sanitary Sewer	City of Montrose	Scott Murphy	(970) 901-1792	smurphy@ci.montrose.co.us
Storm Sewer	City of Montrose	Scott Murphy	(970) 901-1792	smurphy@ci.montrose.co.us

DRAWING INDEX

<u>SHEET NO.</u>	<u>SHEET TITLE</u>
1	COVER
2	DIMENSIONED SITE PLAN
3	GRADING & DRAINAGE OVERVIEW
4	UTILITY PLAN
5	UTILITY PROFILES



Know what's **below**.
Call before you dig.

Construction Plans proudly prepared by:



DEL-MONT CONSULTANTS, INC.
ENGINEERING ▼ SURVEYING
125 Colorado Ave. ▼ Montrose, CO 81401 ▼ (970) 249-2251 ▼ (970) 249-2342 FAX
www.del-mont.com ▼ service@del-mont.com

SUBMITTAL SET

[illegible]


	DELMONT CONSULTANTS, INC. ENGINEERING & SURVEYING 112 Colorado Ave. • Suite 200 • Fort Collins, CO 80501 • Tel: 970.226.0242 FAX www.delmont.com • info@delmont.com	
	DESIGNED BY: PJJ	CHECKED BY: SS/DS
DRAWN BY: PJJ	SCALE: AS NOTED	DATE DESIGNED: 5-17-2023
	FILE NAME: 2219C_BASIS.DWG	

THE PINES AT OXBOW CROSSING, LLC
THE PINES AT OXBOW CROSSING
MONTROSE, COLORADO

COVER

DMC JOB NO.: 22156

SHEET NO.:
1
OF 5 SHEETS

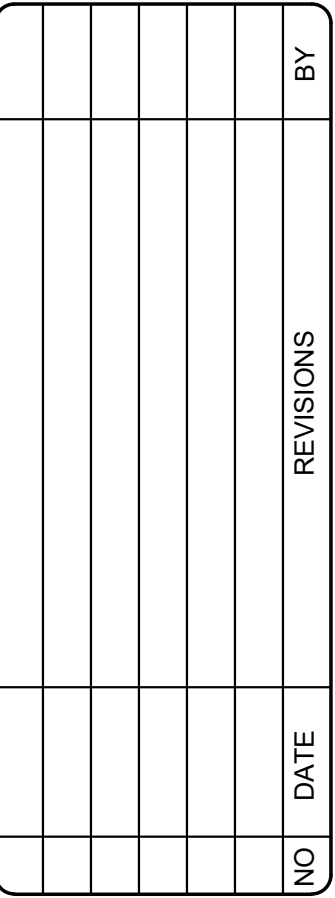

1. SEE LANDSCAPE PLANS FOR PROPER GROUND COVER MATERIAL AND TREE/SHRUB TYPE AND LOCATION.
2. SEE LANDSCAPE PLANS FOR REQUIRED IRRIGATION PIPING SLEEVES UNDER CONCRETE/ASPHALT.
3. ALL SIGNS SHALL BE MOUNTED AT 7 FEET TO THE BOTTOM OF THE UPPER SIGN PER MUTCD STANDARDS

DESIGNED BY	P/J	SCALE	AS NOTED	CHECKED BY	SS/D/S
	P/J	FILE # NAME	25-062-0-AREE.DWG	DATE REVISION	
DRAWN BY:					5-17-2023



DMC


DEL-MONT CONSULTANTS, INC.
ENGINEERING & SURVEYING
 122 Colosimo Ave. • Suite 1070 • 289-2382 FAX
 www.delmont.com • info@delmont.com

THE PINES AT OXBOW CROSSING, LLC
 THE PINES AT OXBOW CROSSING
 MONTROSE, COLORADO

DIMENSIONED SITE PLAN

DMC JOB NO.: 22156





SHEET NO.:
2
OF **5** SHEETS

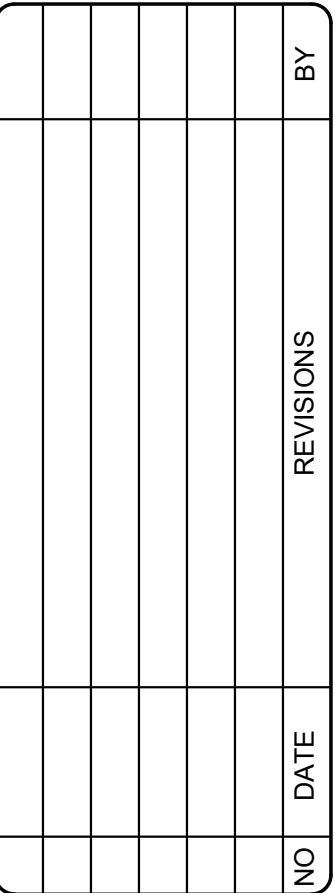

DMC JOB NO.: 22156

SHEET NO.:
4
OF 5 SHEETS

PLOTTED BY PETER. FILE PATH & NAME = \\MS14\PROJECTS\ACTIVE PROJECTS\02022\2156-THE PINES AT OXBOW\C3D2156C_BASE.DWG. PLOT DATE = 5/17/2023 10:43 AM

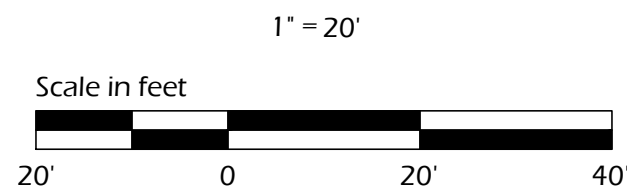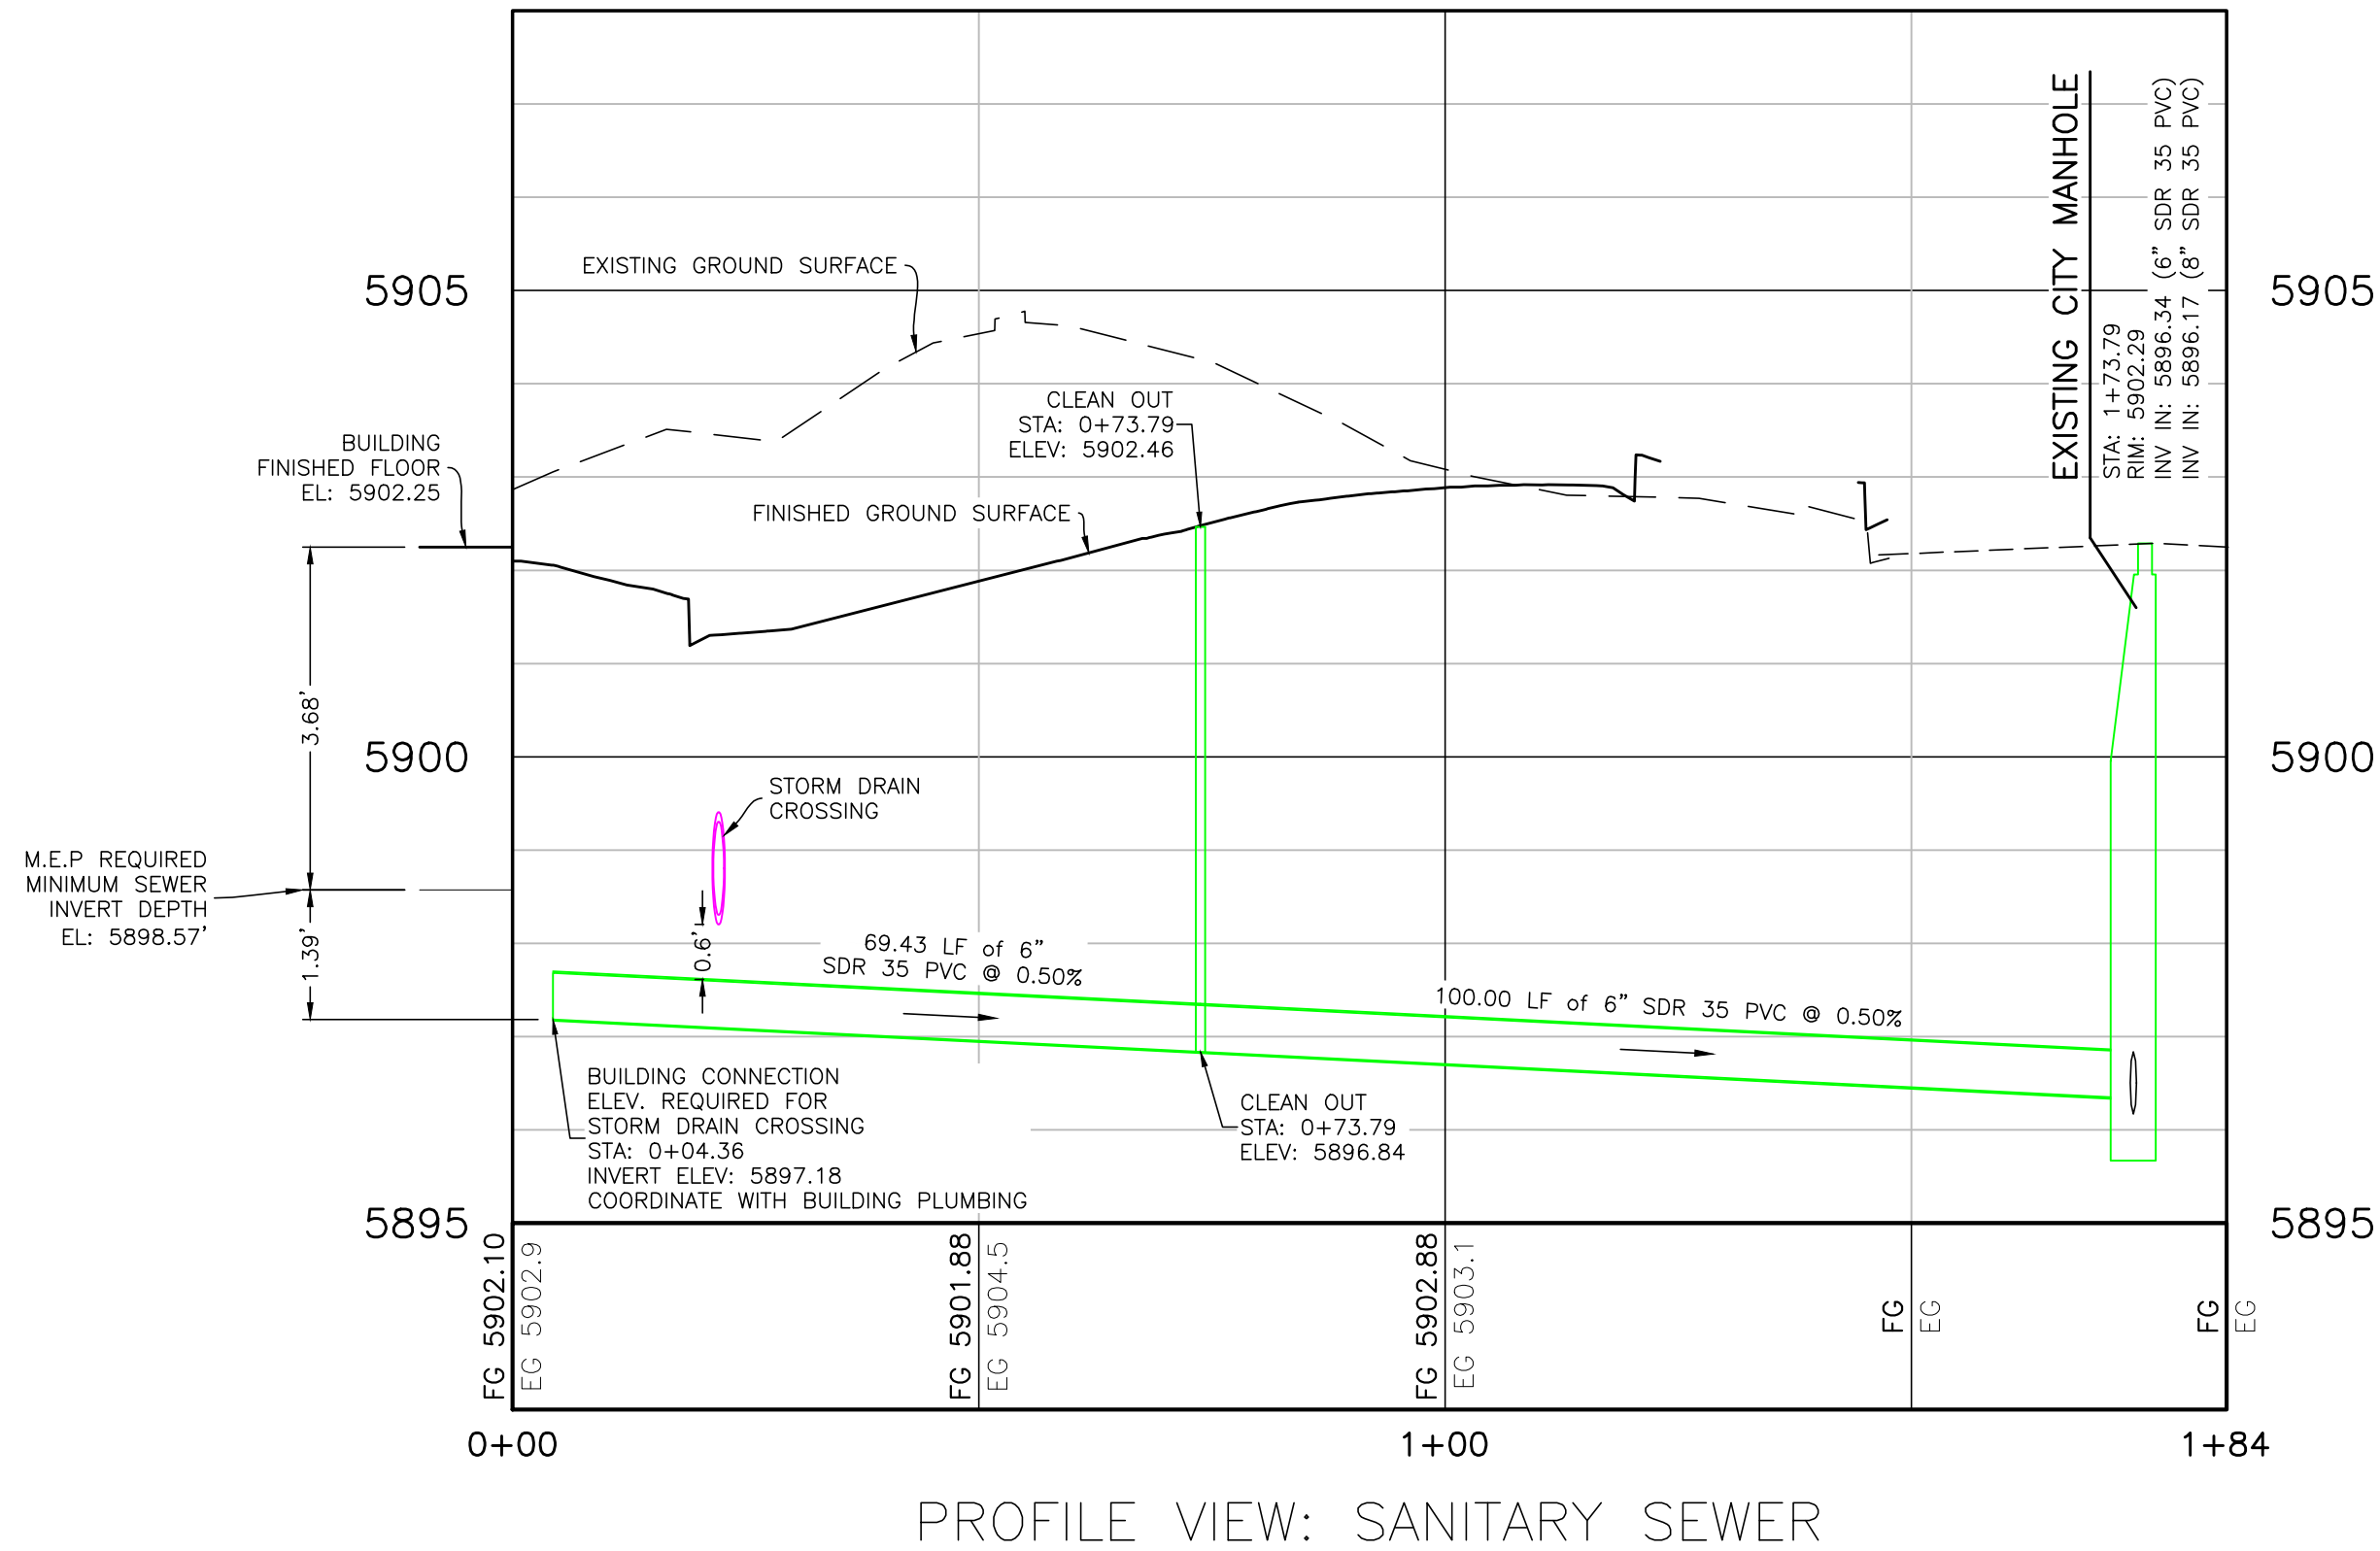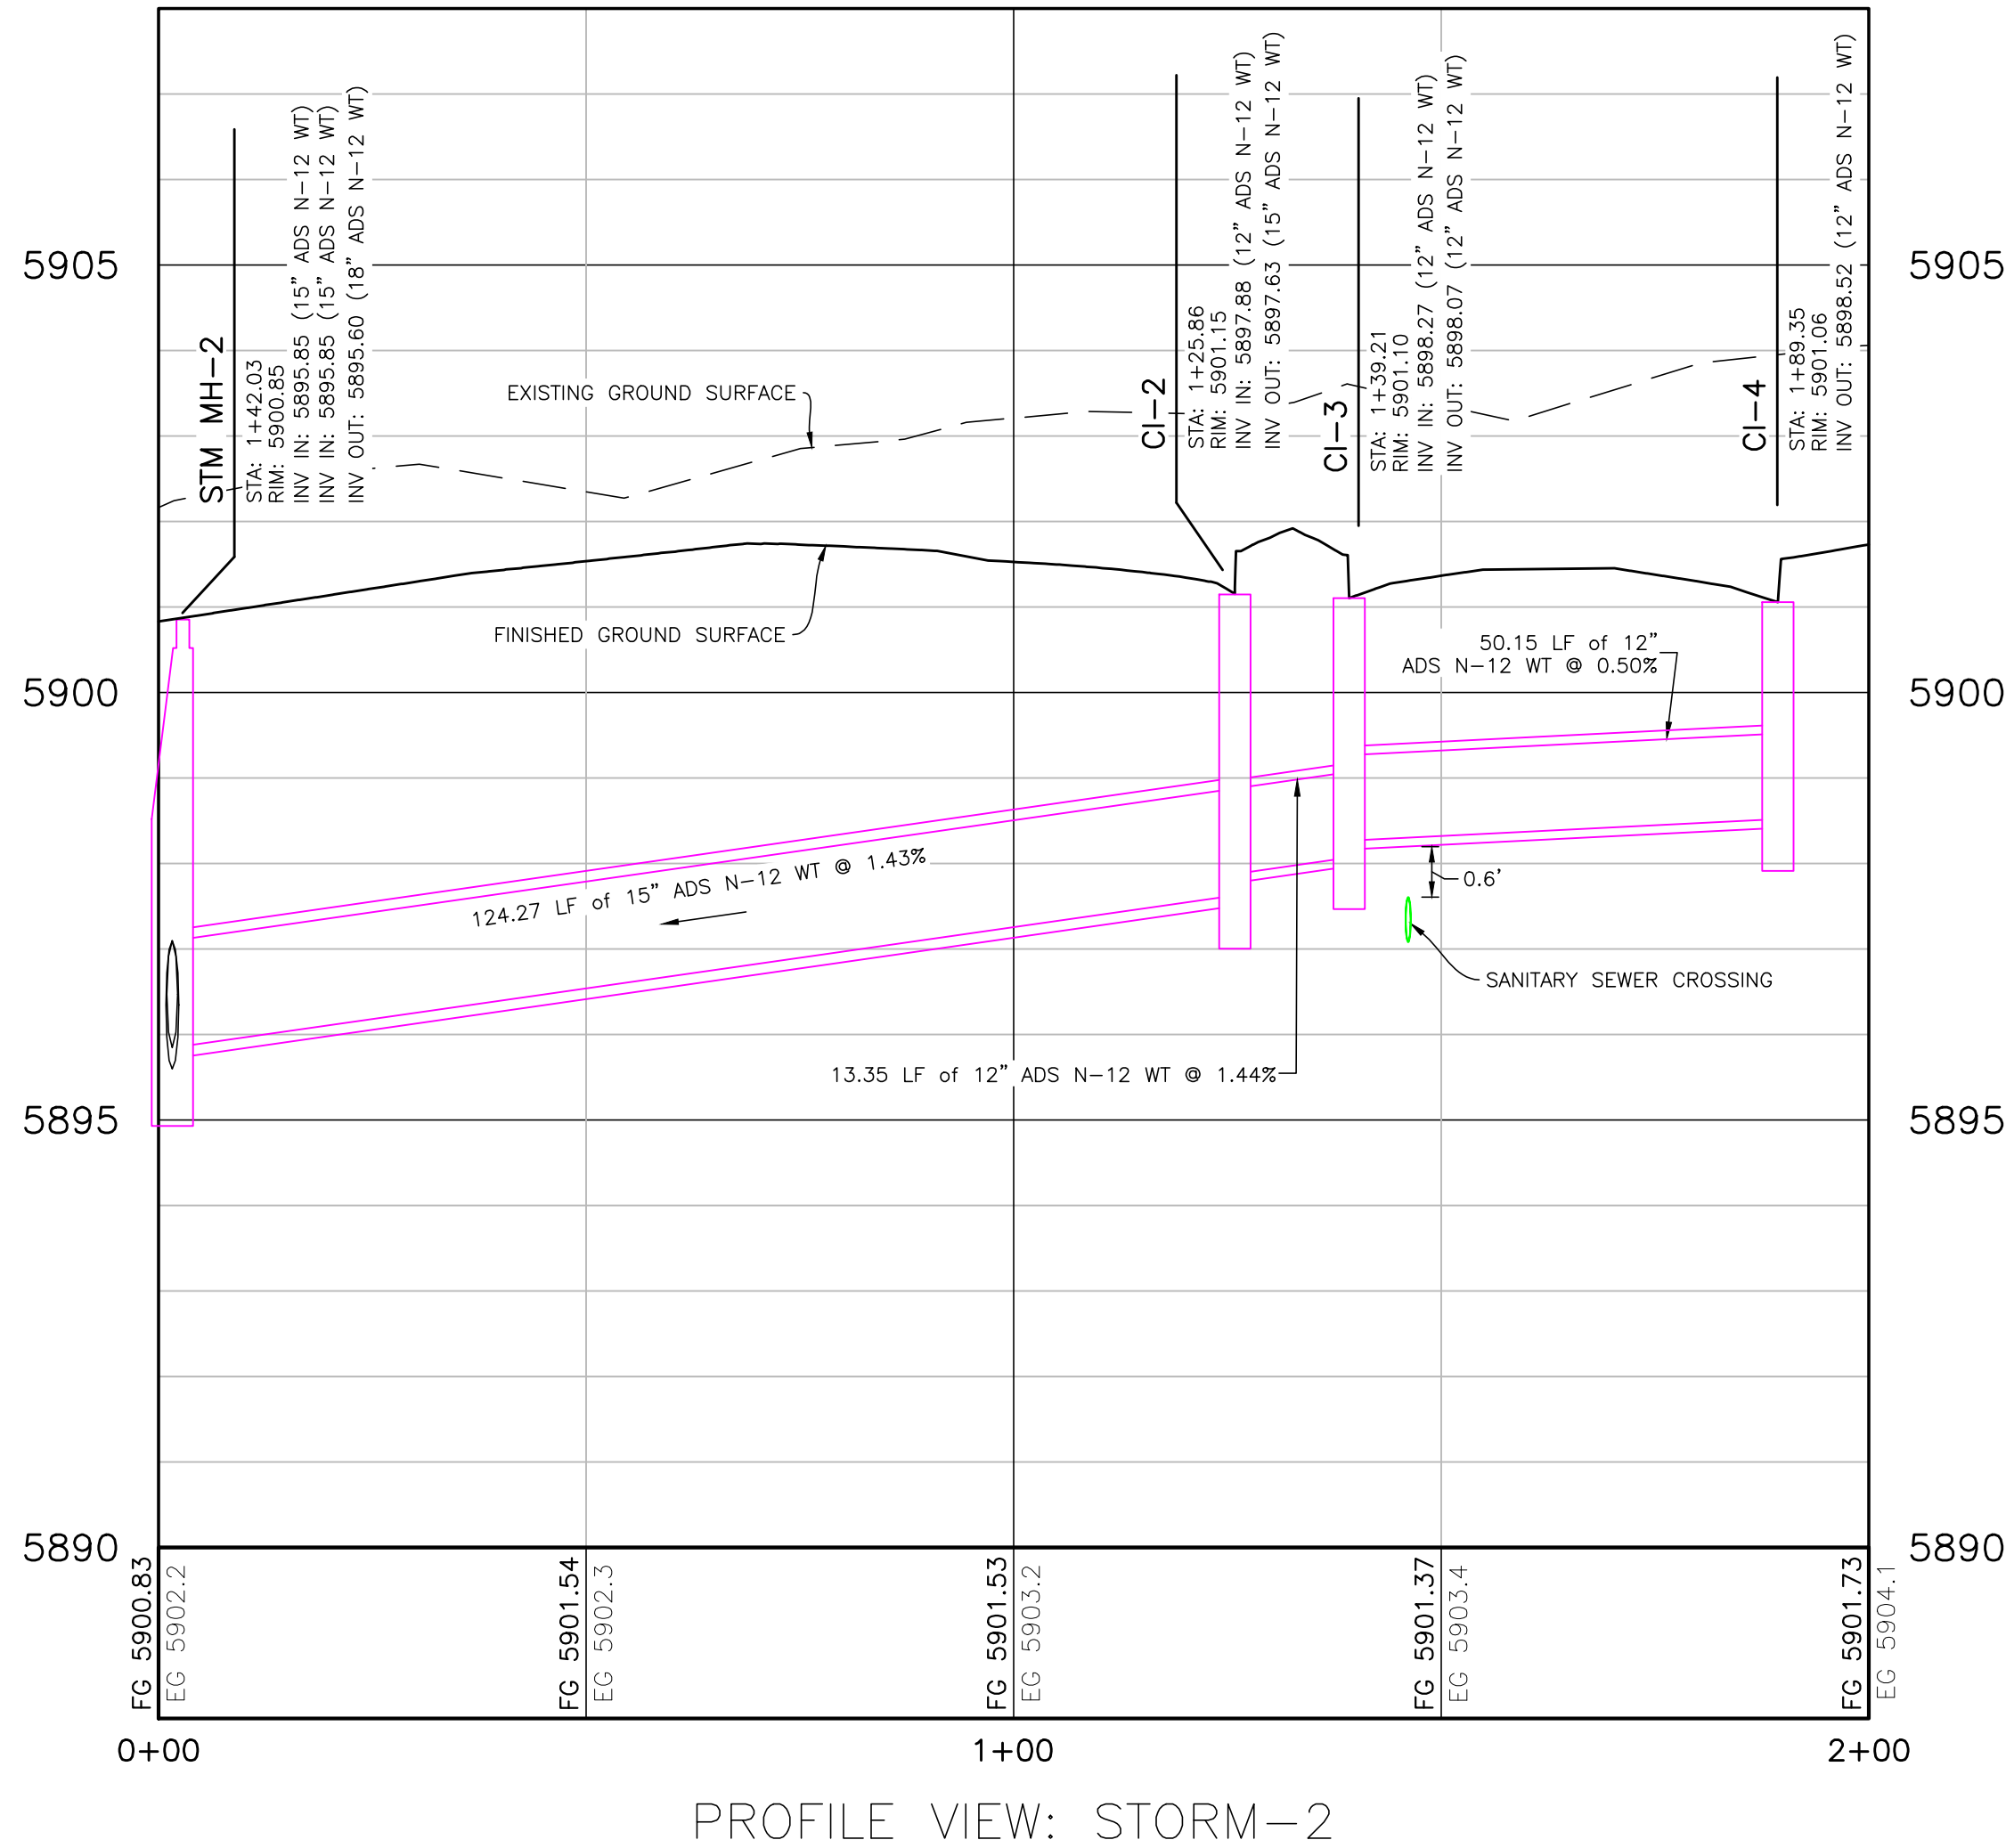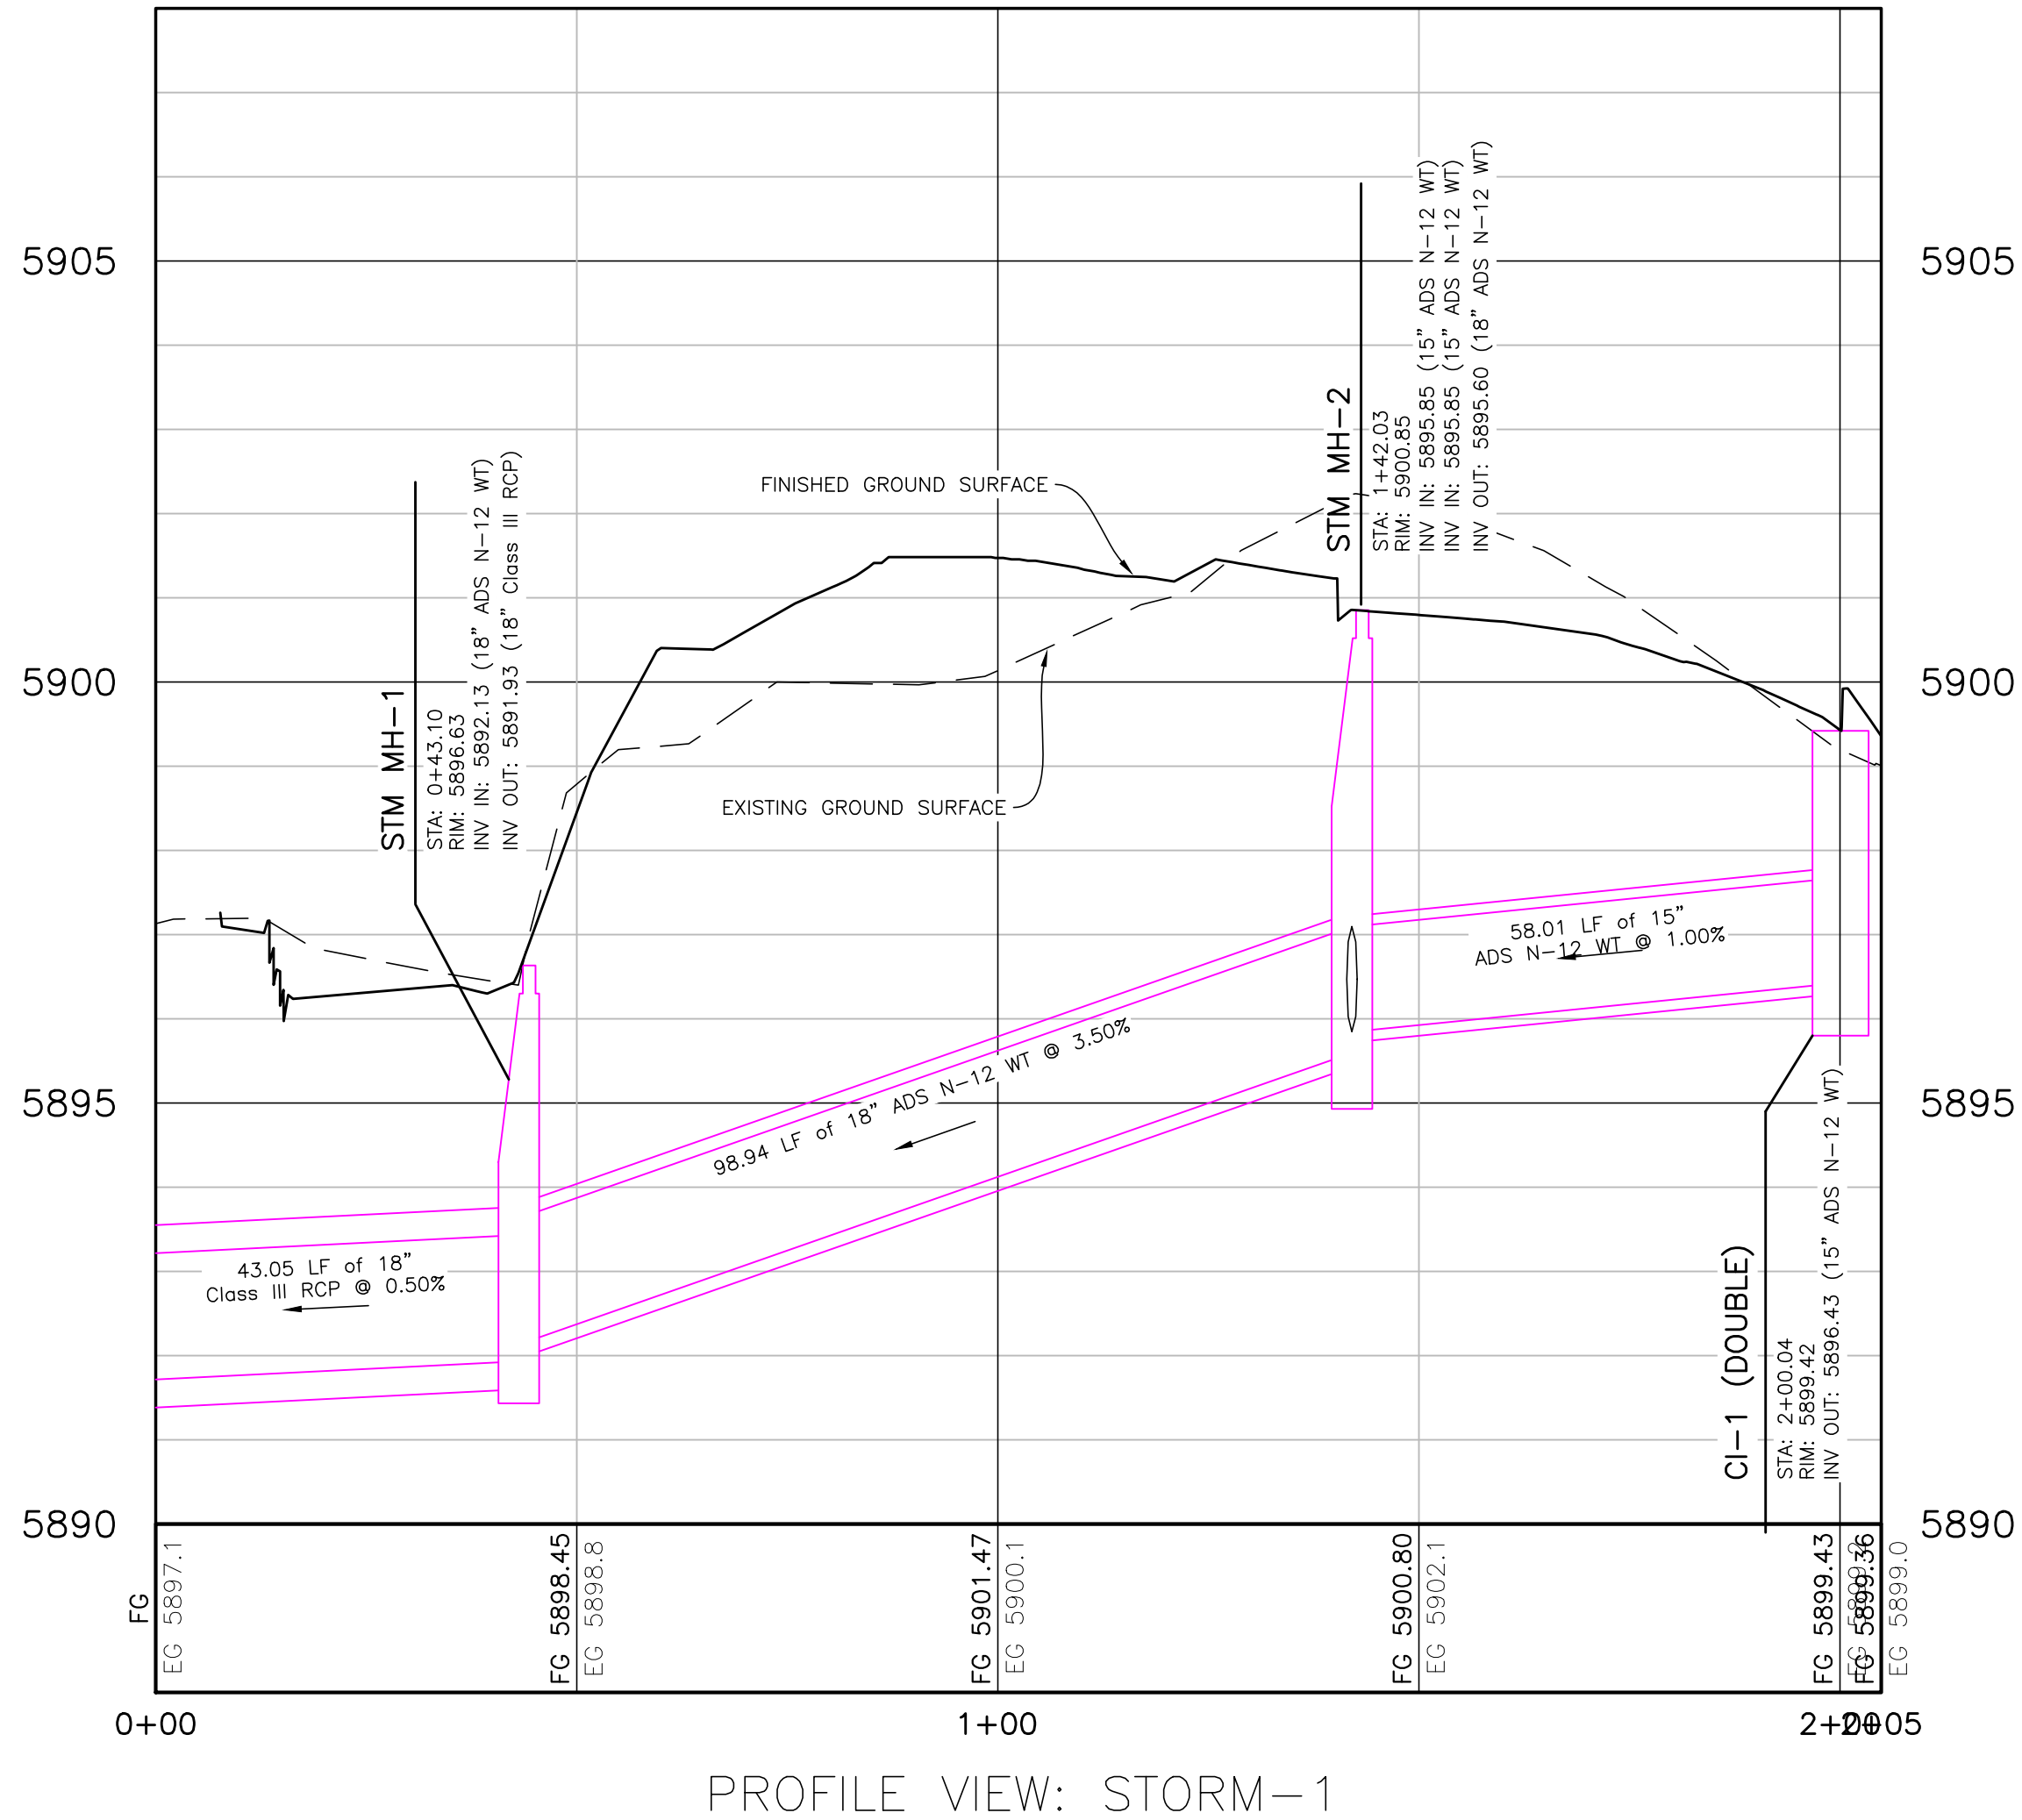

SUBMITTAL SET


 DEL-MONT CONSULTANTS, INC. ENGINEERING & SURVEYING 122 Colorado Ave. • Montrose, CO 81401 • (970) 249-2251 • (970) 249-2342 FAX WWW.DMC-CONSULTANTS.COM • INFO@DMC-CONSULTANTS.COM		DESIGNED BY: SCALE: CHECKED BY: DATE ISSUED: 5-17-2023	SS/DS DATE ISSUED: 5-17-2023	NO DATE REVISIONS BY
THE PINES AT OXBOW CROSSING, LLC THE PINES AT OXBOW CROSSING MONTROSE, COLORADO		UTILITY PROFILES		
DMC JOB NO.: 22156		SHEET NO.: 5		




3 PLANNING - SOUTH ELEVATION
PL 1 3/32" = 1'-0"



4 PLANNING - NORTH ELEVATION
PL 1 3/32" = 1'-0"

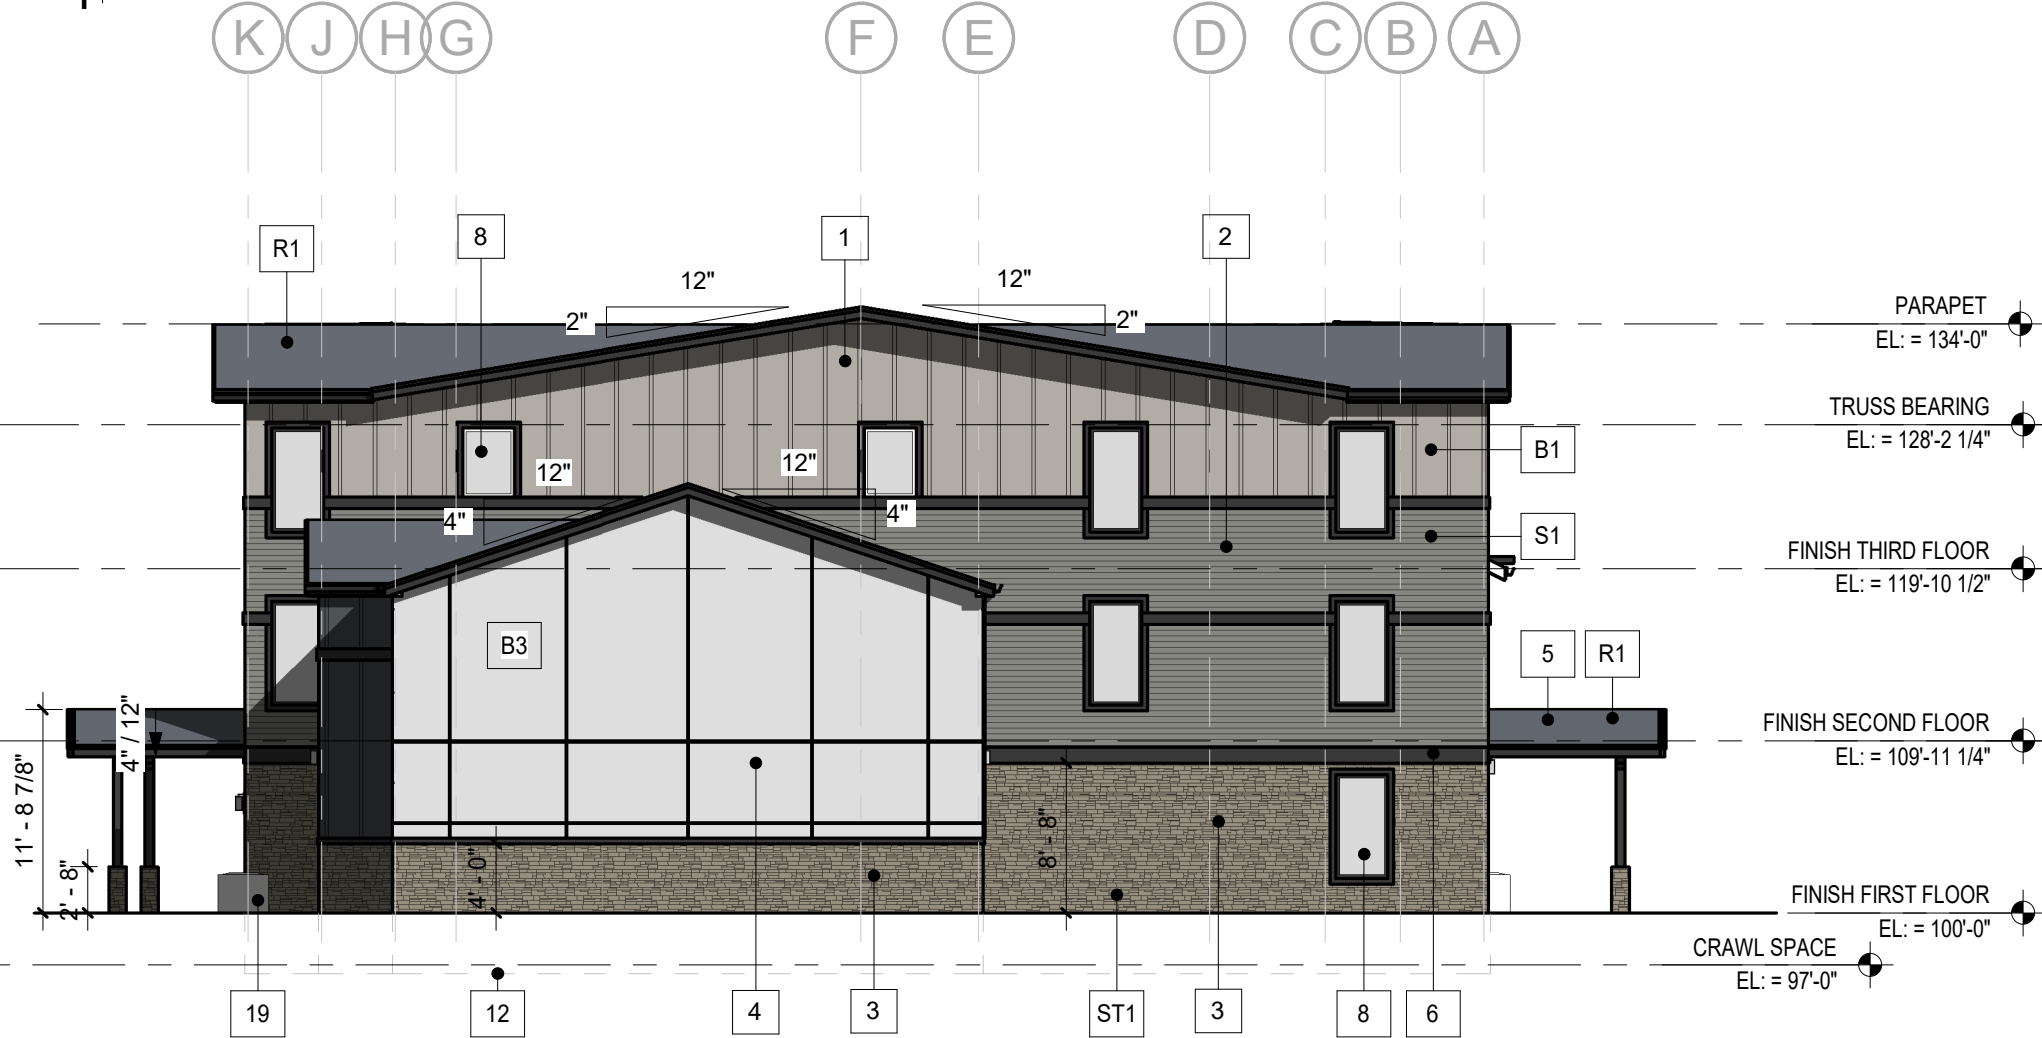


1 PLANNING - EAST ELEVATION
PL 1 3/32" = 1'-0"

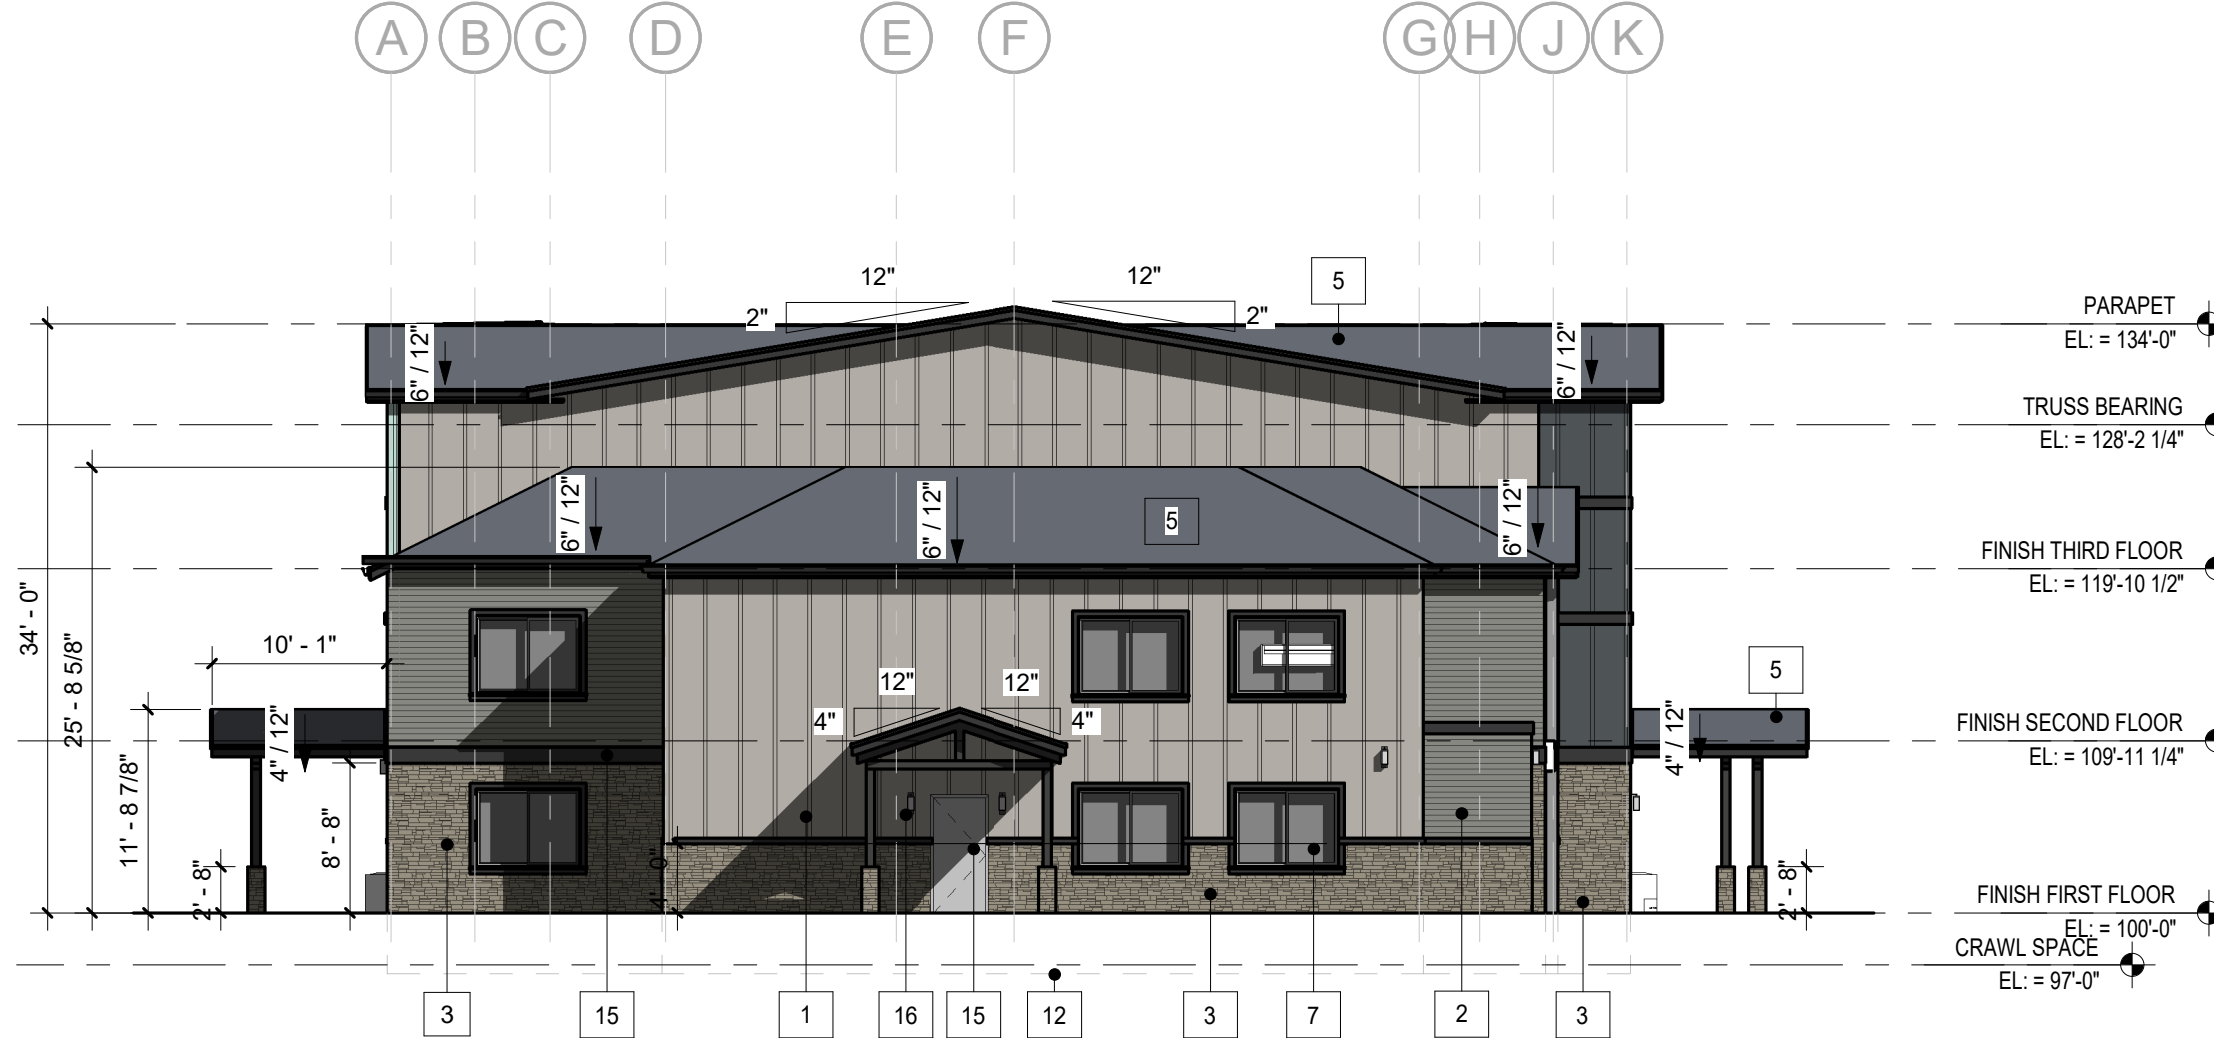


2 PLANNING - WEST ELEVATION
PL 1 3/32" = 1'-0"

MATERIAL LEGEND


- | | |
|----|---|
| 1 | HARDIE BOARD - VERTICAL BOARD AND BATTEN SIDING - GREEN |
| 2 | HARDIE BOARD - HORIZONTAL SIDING |
| 3 | CULTURED STONE VENEER |
| 4 | HARDIE BOARD FIBER CEMENT PANEL |
| 5 | ASPHALT SHINGLE ROOF |
| 6 | 1X HARDIE BOARD TRIM BOARD |
| 7 | VINYL SLIDING WINDOW WITH INSULATED GLAZING |
| 8 | VINYL FIXED WINDOW WITH INSULATED GLAZING |
| 9 | PREFINISHED ALUMINUM STOREFRONT WITH INSULATED GLAZING |
| 10 | METAL GUARDRAIL @ 34" |
| 11 | CULTURED STONE SILL/CAP WITH FLASHING |
| 12 | CONCRETE FOOTING |
| 13 | METAL PERGOLA ROOF |
| 14 | VINYL SLIDING GLASS DOOR WITH INSULATED GLAZING |
| 15 | H.M. INSULATED MAN DOOR PAINT TO MATCH ADJACENT WALL |
| 16 | EXTERIOR WALL MOUNTED LIGHT FIXTURE |
| 17 | STEEL COLUMN WITH STONE VENEER BASE |
| 18 | WOOD TRUSS AT ENTRANCE |
| 19 | CONDENSER UNIT RE: MEP |
| 20 | MECHANICAL EQUIPMENT AT ROOF RE: MEP |
| 21 | TRASH ENCLOSURE CAP |
| 22 | STUCCO |
| 23 | DOUBLE METAL GATE |

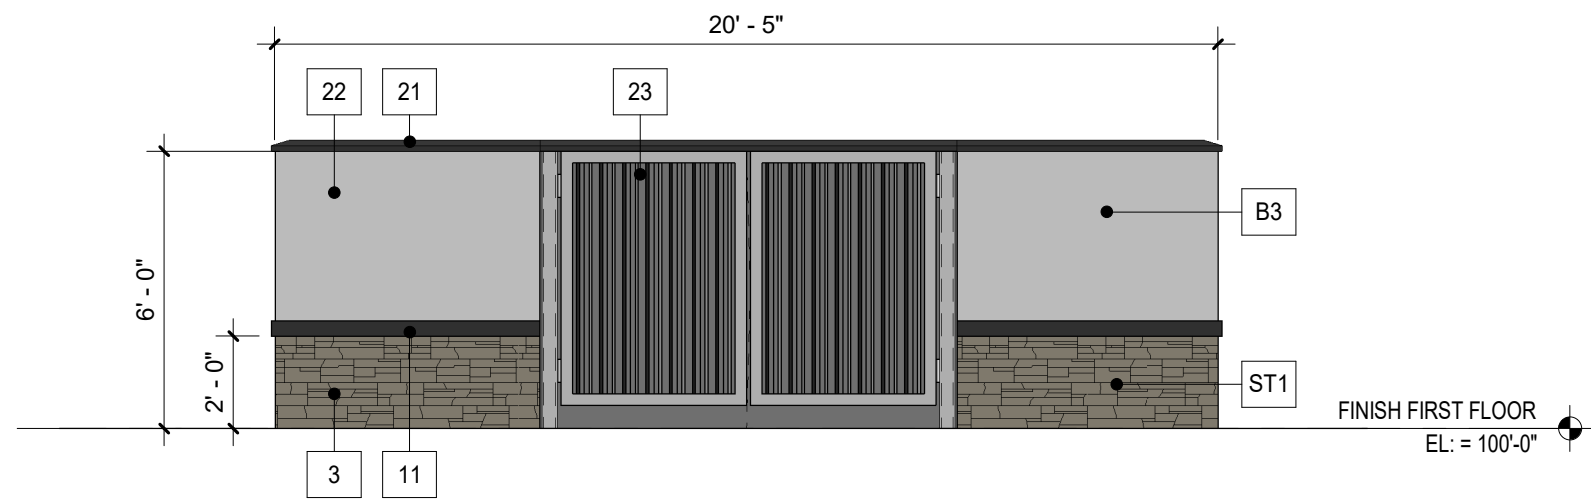


1
PL 1/4" = 1'-0" TRASH ENCLOSURE - WEST ELEVATION

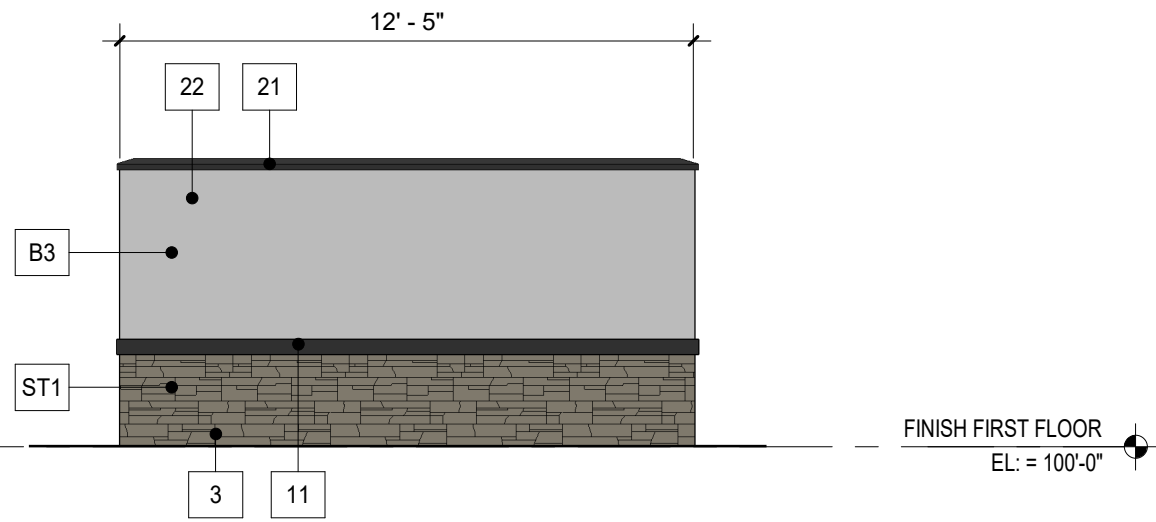

3
PL 1/4" = 1'-0" TRASH ENCLOSURE - NORTH ELEVATION

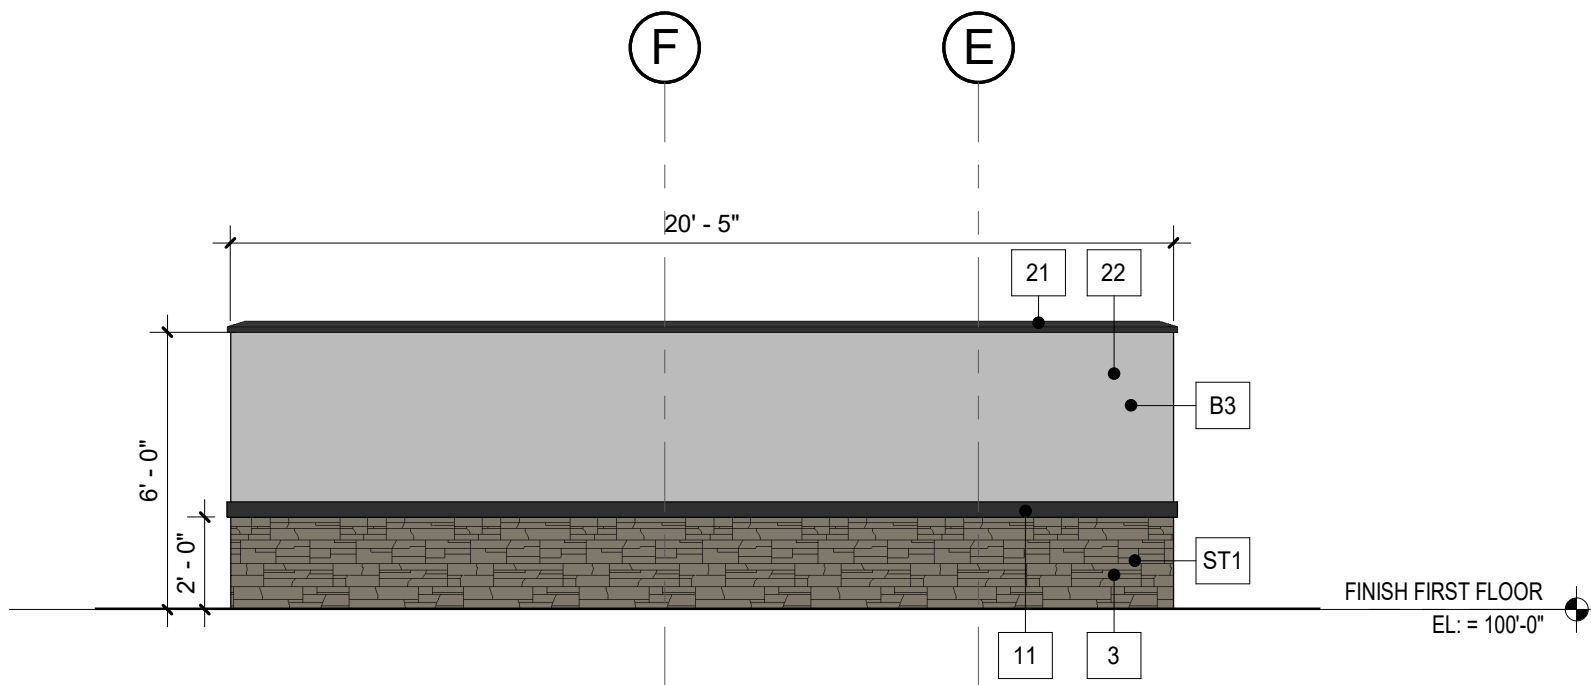

2
PL 1/4" = 1'-0" TRASH ENCLOSURE - EAST ELEVATION

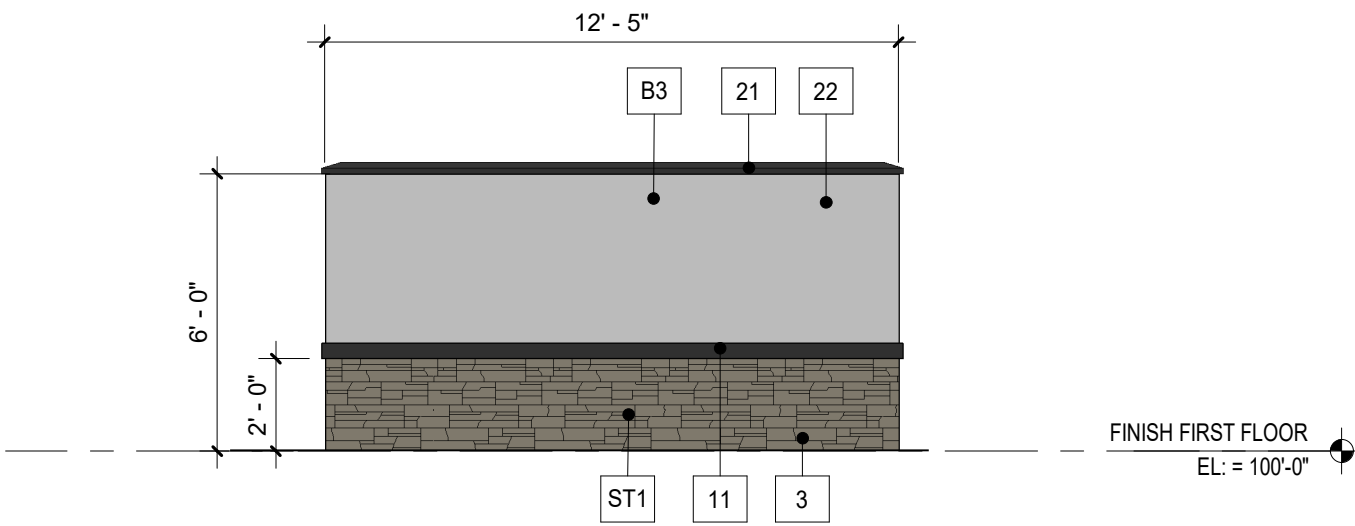

4
PL 1/4" = 1'-0" TRASH ENCLOSURE - SOUTH ELEVATION

MATERIAL LEGEND




- | | |
|----|---|
| 1 | HARDIE BOARD - VERTICAL BOARD AND BATTEN SIDING - GREEN |
| 2 | HARDIE BOARD - HORIZONTAL SIDING |
| 3 | CULTURED STONE VENEER |
| 4 | HARDIE BOARD FIBER CEMENT PANEL |
| 5 | ASPHALT SHINGLE ROOF |
| 6 | 1X HARDIE BOARD TRIM BOARD |
| 7 | VINYL SLIDING WINDOW WITH INSULATED GLAZING |
| 8 | VINYL FIXED WINDOW WITH INSULATED GLAZING |
| 9 | PREFINISHED ALUMINUM STOREFRONT WITH INSULATED GLAZING |
| 10 | METAL GUARDRAIL @ 34" |
| 11 | CULTURED STONE SILL/CAP WITH FLASHING |
| 12 | CONCRETE FOOTING |
| 13 | METAL PERGOLA ROOF |
| 14 | VINYL SLIDING GLASS DOOR WITH INSULATED GLAZING |
| 15 | H.M. INSULATED MAN DOOR PAINT TO MATCH ADJACENT WALL |
| 16 | EXTERIOR WALL MOUNTED LIGHT FIXTURE |
| 17 | STEEL COLUMN WITH STONE VENEER BASE |
| 18 | WOOD TRUSS AT ENTRANCE |
| 19 | CONDENSER UNIT RE: MEP |
| 20 | MECHANICAL EQUIPMENT AT ROOF RE: MEP |
| 21 | TRASH ENCLOSURE CAP |
| 22 | STUCCO |
| 23 | DOUBLE METAL GATE |

MATERIAL COLOR LEGEND


- | | |
|-----|--|
| S1 | JAMES HARDIE HORIZONTAL SIDING - SLATE STEPS |
| B1 | JAMES HARDIE BOARD & BATTEN - STONE PAVER |
| B2 | JAMES HARDIE BOARD & BATTEN - LAST EMBERS |
| B3 | JAMES HARDIE BOARD - BIRCH TREE |
| R1 | MARKLAY ASPHALT SHINGLE ROOF - MIDNIGHT BLACK |
| ST1 | CULTURED STONE PROFIT APLINE LEDGESTONE - ECHO RIDGE |

*ALL WINDOW/DOOR TRIM, FASCIA/GUTTER AND TRIM TO BE PAINTED BLACK


*ALL EXTERIOR WOOD BEAMS TO BE STAINED WITH BEHR SEMI TRANSPARENT SLATE

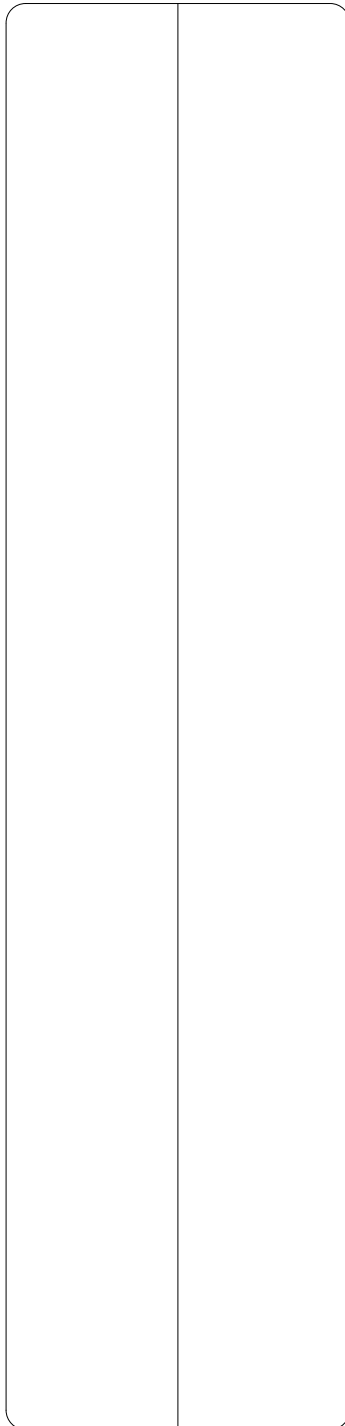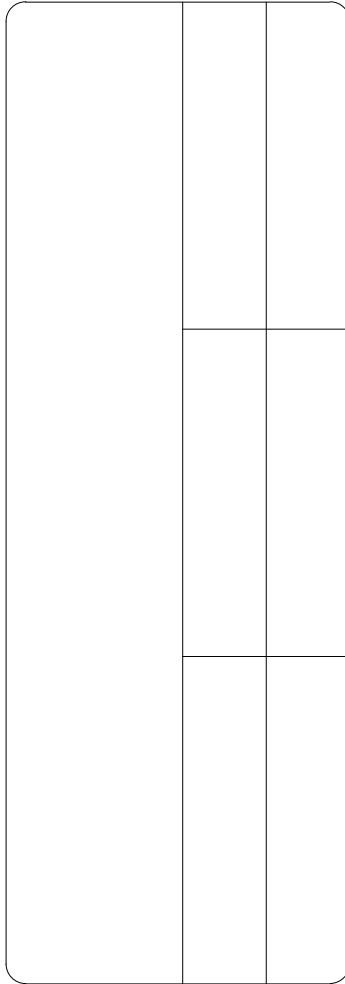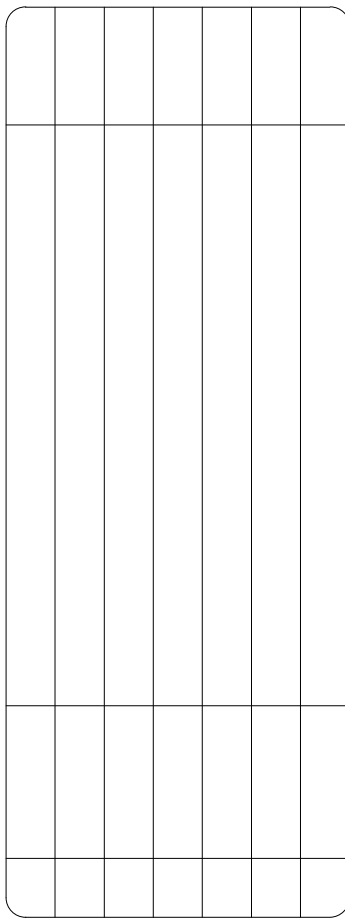

THE PINES AT OXBOW CROSSING LANDSCAPE PLAN

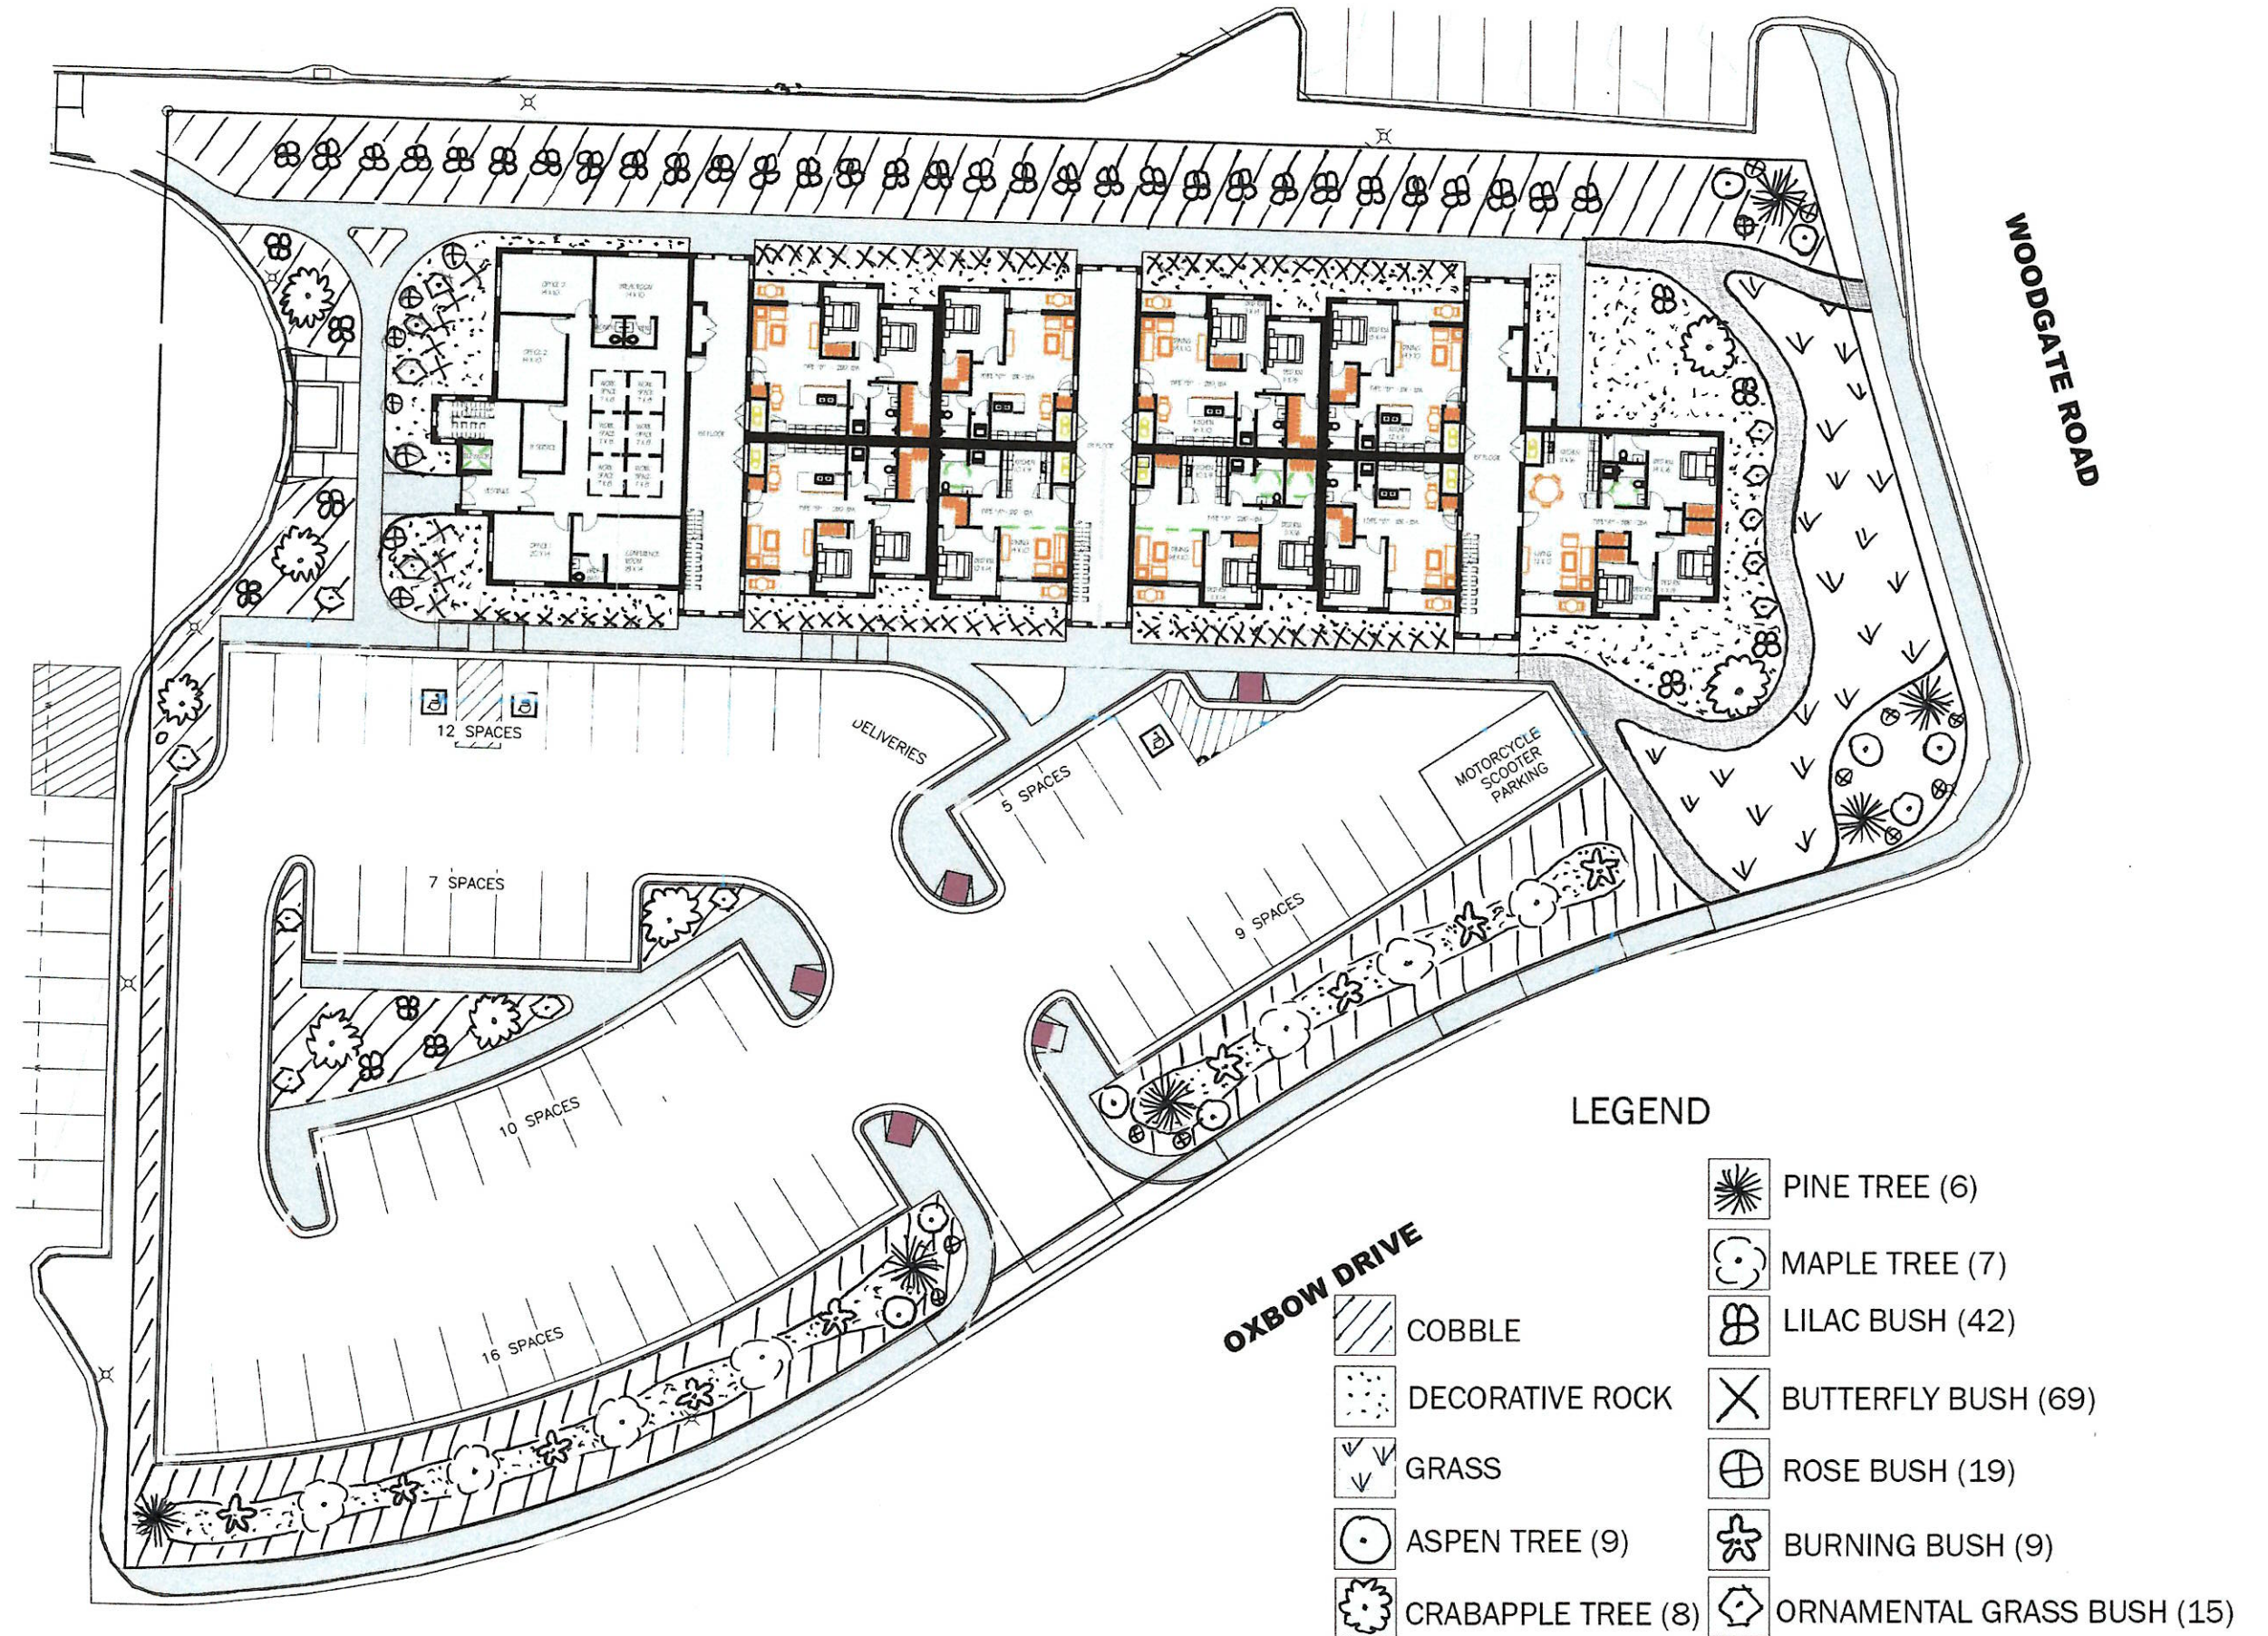


C:\Users\Wanda\Documents\23023
R23 - Woodrose Multi
Family_WEP_Central_WandaG.nt

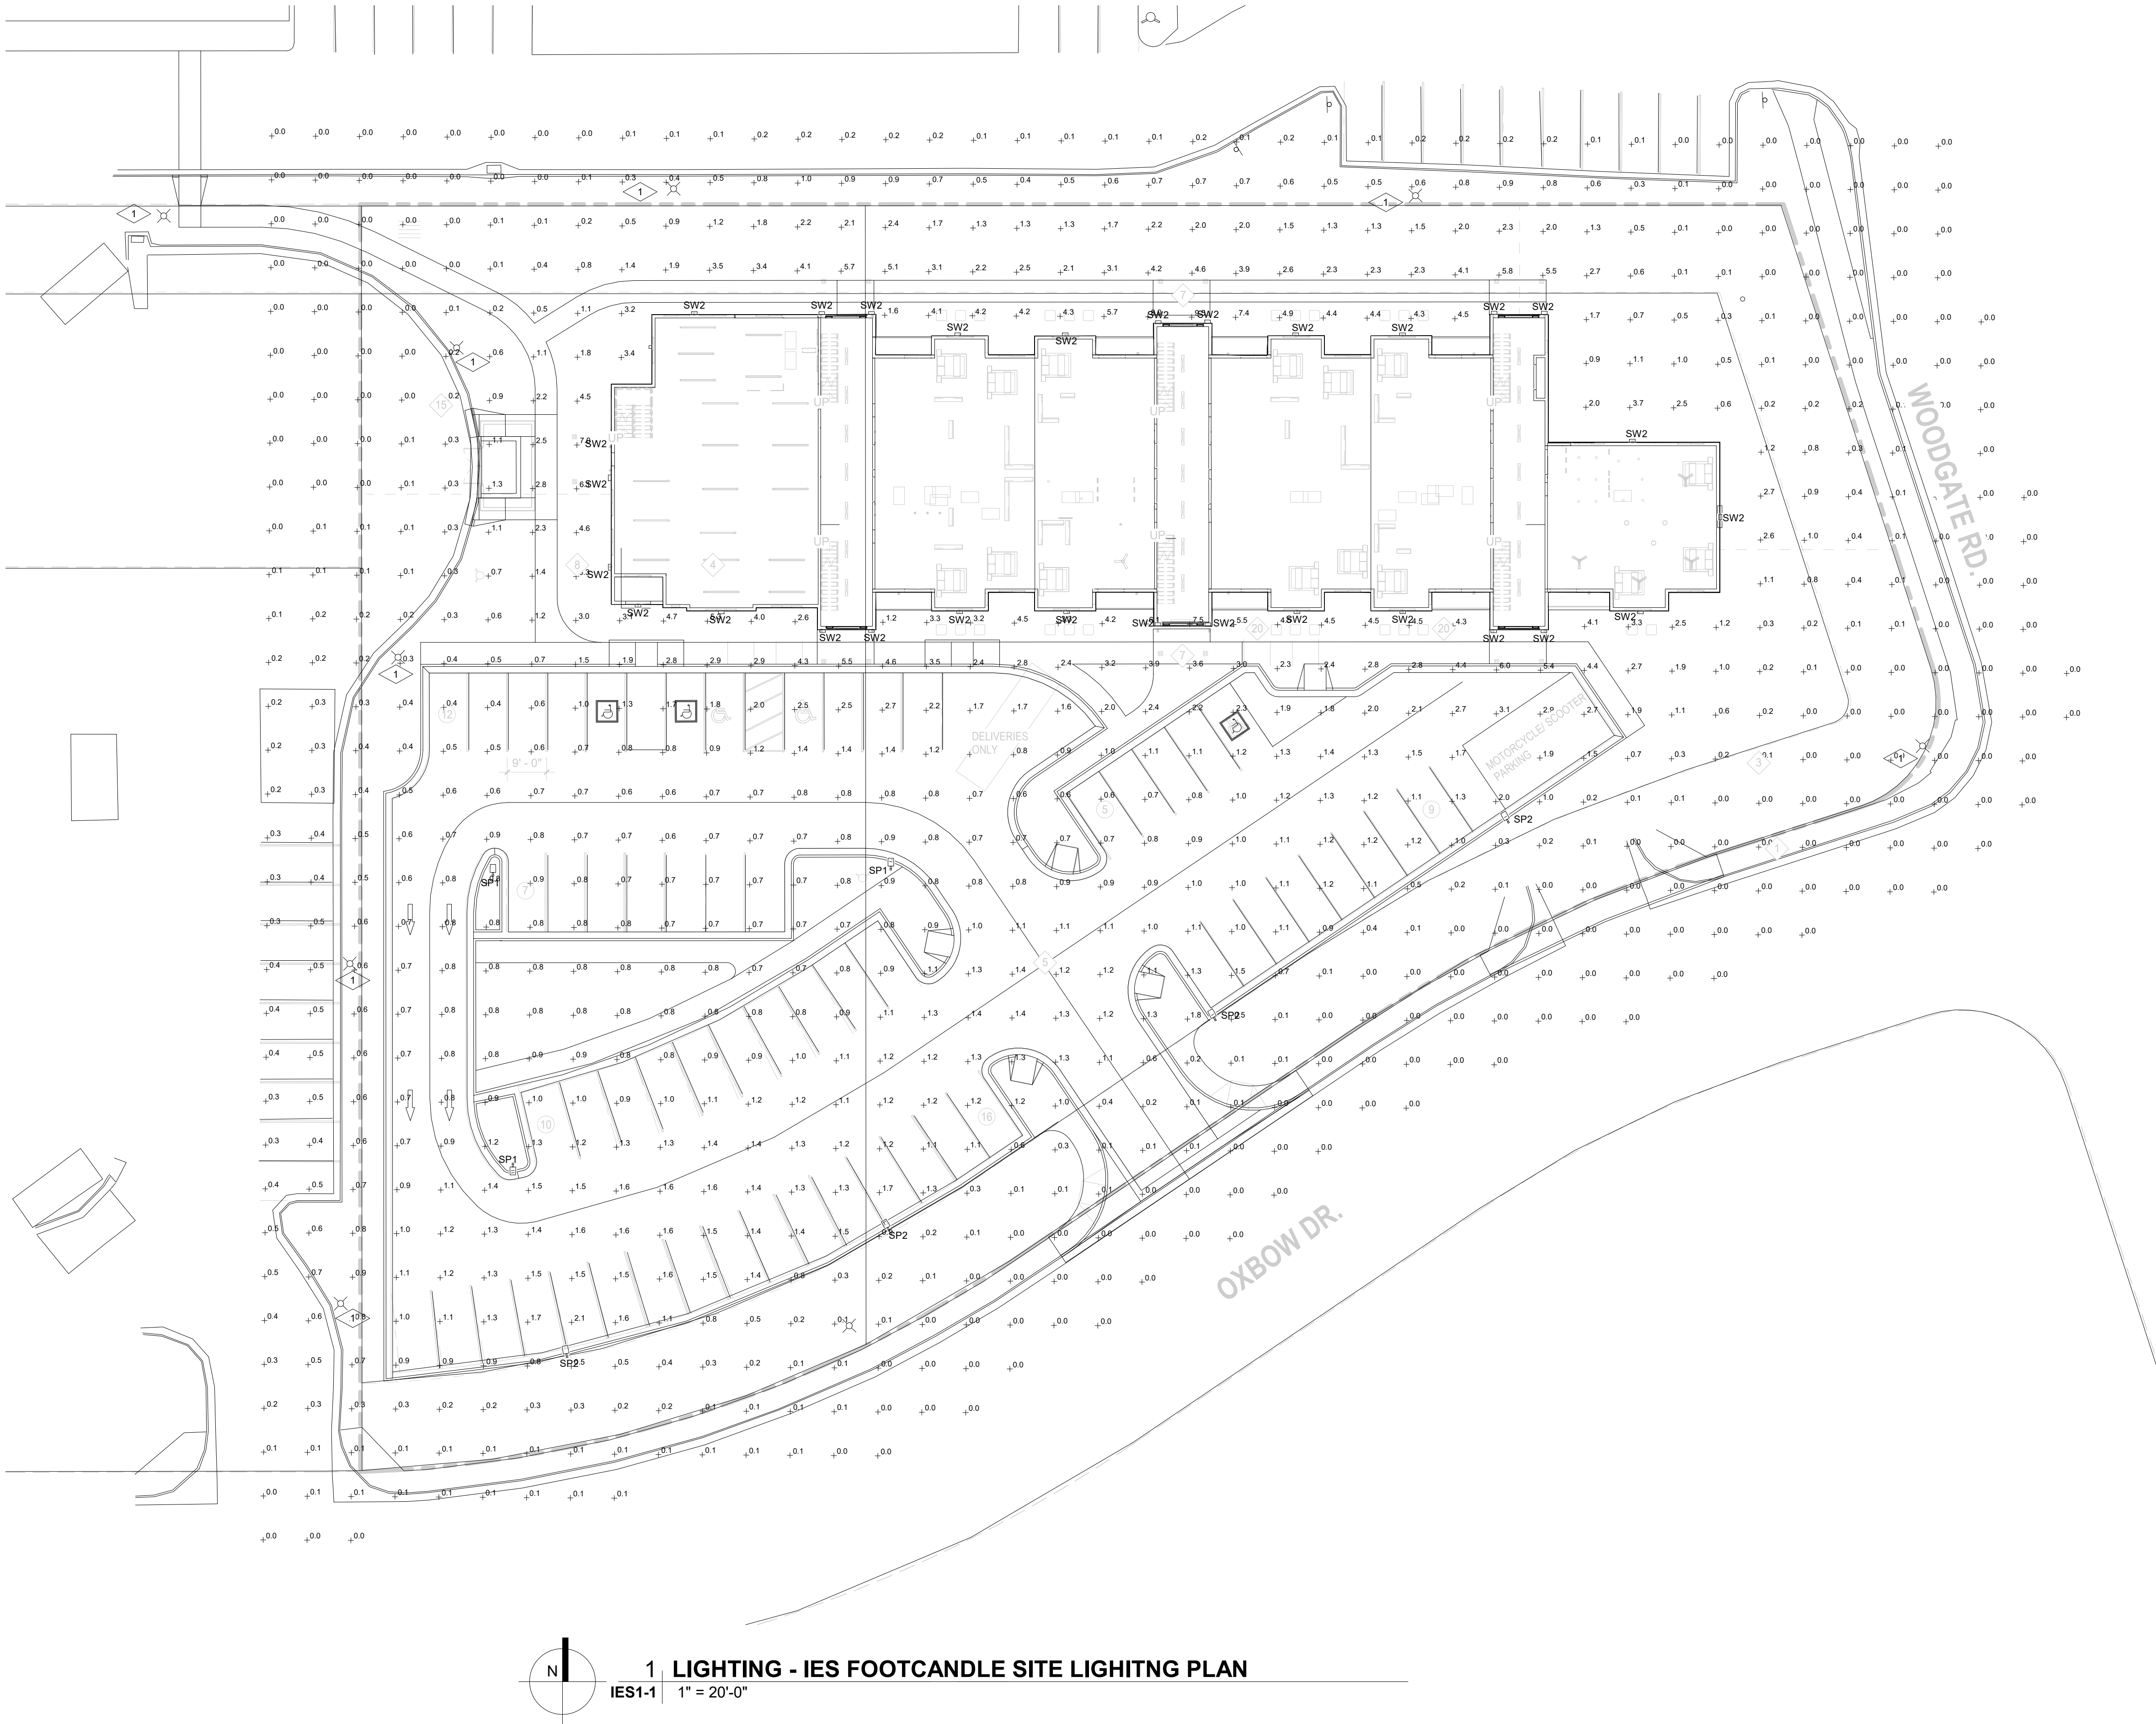

1 LIGHTING - IES FOOTCANDLE SITE LIGHTING PLAN
IES1-1 1" = 20'-0"

SITE LIGHTING FIXTURE SCHEDULE					
TYPE MARK	MANUFACTURER	MODEL	LAMP	DESCRIPTION	Count
SP1	McGRAW-EDISON	GLEON-SA1-B-735-U-SMQ-BZ-BPC-MS/DI M-L20-FSIR-100	LED DIMMING, 6285LM, 3500K, 70CRI, 44W	GLEON GALLEON LED POLE MOUNTED LED LIGHT, MOUNT ON A 25'-0" POLE ON A 3'-0" BASE, TYPE 5 SQUARE MEDIUM DISTRIBUTION, BRONE FINISH	3
SP2	McGRAW-EDISON	GLEON-SA1-B-735-U-SL3-BZ-BPC-MS/DI M-L20-FSIR-100	LED DIMMING, 6285LM, 3500K, 70CRI, 44W	GLEON GALLEON LED POLE MOUNTED LED LIGHT, MOUNT ON A 25'-0" POLE ON A 3'-0" BASE, TYPE 3 WITH SPILL LIGHT CONTROL DISTRIBUTION, BRONE FINISH	4
SW2	INVUE LIGHTING	ENT-SA1A-735-U-T4W-BZ-MS/DIM-L20-F SIR-100-PK-CBP-CEC	0-10V LED DIMMING, 1924LM, 3500K, 20W	ENTRI TRIANGLE REVEALS EXTERIOR WALL SCONCE, COLD WEATHER BATTERY PACK, BRONZE FINISH, MOTION SENSOR FOR DIMMING OPERATION	30

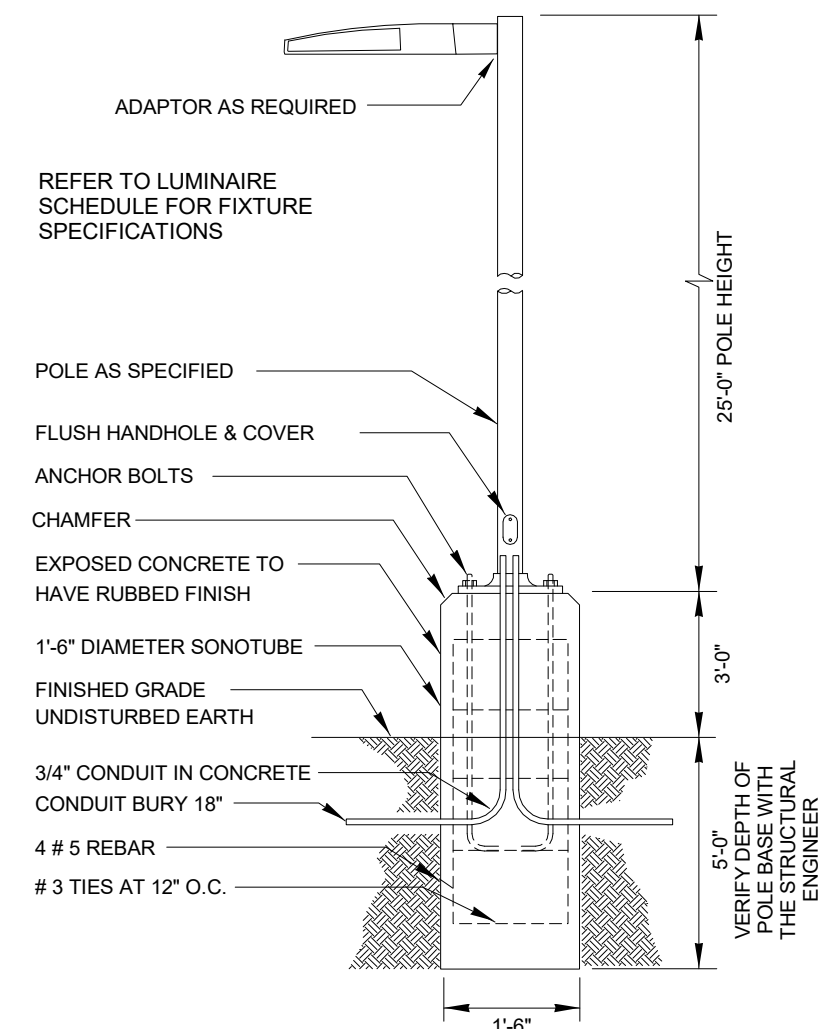

LIGHT POLE DETAIL

NOT TO SCALE

NOTES:

1. VERIFY THE BURY DEPTH AND DIAMETER OF THE SONOTUBE WITH THE STRUCTURAL ENGINEER PRIOR TO PURCHASING THE EQUIPMENT. DEPTH WILL DEPEND ON SOIL CONDITIONS. TYPICAL CONCRETE DEPTH IS 5 FT.
2. THE ELECTRICAL CONTRACTOR IS TO INSTALL VIBRATION DAMPERS IN ALL POLES. OBTAIN DAMPERS FROM POLE MANUFACTURER FOR EACH ALUMINUM POLE.
3. ALL OUTSIDE LIGHT SOURCES SHALL COMPLY WITH THE LOCAL ZONING AND DEVELOPMENT CODE.
4. NOTIFY ENGINEER OF ANY OBSTRUCTIONS TO POLE PLACEMENT IMMEDIATELY BEFORE PROCEEDING.

PHOTOMETRIC CALCULATION DISCLAIMER:

LIGHTING PATTERN USED FOR LUMINAIRES REPRESENTS ILLUMINATION LEVELS CALCULATED FROM LABORATORY DATA TAKEN UNDER CONTROLLED CONDITIONS IN ACCORDANCE WITH ILLUMINATING ENGINEERING SOCIETY APPROVED METHODS. ACTUAL PERFORMANCE OF ANY LUMINAIRE MAY VARY DUE TO VARIATION IN VOLTAGE, TOLERANCE IN LAMPS AND OTHER VARIABLE FIELD AND EQUIPMENT CONDITIONS.

EXTERIOR LIGHTING DESIGN CONCEPTS:

1. CALCULATIONS ARE USING POINT-TO-POINT METHOD WITH TEN FEET DISTANCE BETWEEN CALCULATION GRID POINTS. USING VISUAL LIGHTING CALCULATIONS SOFTWARE.
2. THE IESNA STANDARDS REPRESENT THE LOWEST ACCEPTABLE LEVELS FOR PROPER VISIBILITY AND RECOMMEND MINIMUM MAINTAINED LIGHT LEVELS FOR OPEN PARKING LOTS AT 0.2-0.5 FOOT CANDLE LEVELS FOR ENHANCED SECURITY CONDITIONS.
3. PROPOSED LIGHT FIXTURES AND LIGHT LEVELS ARE TO BE IN ACCORDANCE WITH ALL LOCAL REQUIREMENTS.

EXTERIOR LIGHTING NOTES:

1. LIGHT FIXTURES SHALL BE INSTALLED AND MAINTAINED IN A MANNER CONSISTENT WITH THE LIGHTING PLAN APPROVED BY THE CITY PLANNING DEPARTMENT. THE PROPERTY OWNER SHALL BE RESPONSIBLE FOR THE PROPER MAINTENANCE OF THE LIGHTING FIXTURES ON THEIR PROPERTY.
2. REFER TO LANDSCAPE PLANS FOR MATURE HEIGHT OF EXISTING AND PROPOSED TREES.
3. REFER TO ARCHITECTURAL ELEVATIONS FOR BUILDING HEIGHT INFORMATION.
4. ALL EXTERIOR LIGHT FIXTURES SHALL BE OPERATED BY ASTRONOMICAL TIME CLOCK, PHOTOCELL, OR LIGHTING CONTROL SYSTEM.
5. POST-CURFEW LIGHT LEVELS FOR PARKING LOTS SHALL BE REDUCED BY AT LEAST 50%. ENTRY LIGHTS MAY BE LEFT ON.
6. FACILITIES & SITE DEVELOPMENT OF THIS SITE ARE TO BE CONSTRUCTED IN ACCORDANCE WITH CITY CONSTRUCTION SPECIFICATIONS, STANDARDS AND DETAILS.
7. ALL OUTSIDE LIGHT SOURCES SHALL CONFORM TO ALL LOCAL ZONING & DEVELOPMENT CODES.
8. PARKING LOT LIGHTS SHALL OPERATE DUSK TO PRE-SET OFF, SO THAT THEY EXTINGUISH ONE HOUR AFTER CLOSE OF BUSINESS OR NO LATER THAN 10 P.M. BUILDING SECURITY LIGHTS WILL OPERATE FROM DUSK TO DAWN.

ACCEPTANCE BLOCK

THE CITY REVIEW CONSTITUTES GENERAL COMPLIANCE WITH THE CITY'S DEVELOPMENT STANDARDS, SUBJECT TO THESE PLANS BEING SEALED, SIGNED, AND DATED BY THE PROFESSIONAL OF RECORD. REVIEW BY THE CITY DOES NOT CONSTITUTE APPROVAL OF THE PLAN DESIGN. THE CITY NEITHER ACCEPTS NOR ASSUMES ANY LIABILITY FOR ERRORS OR OMISSIONS. ERRORS IN THE DESIGN OR CALCULATIONS REMAIN THE RESPONSIBILITY OF THE PROFESSIONAL OF RECORD. CONSTRUCTION MUST COMMENCE WITHIN ONE YEAR FROM THE DATE OF PLAN SIGNATURE.

CITY DEVELOPMENT ENGINEER _____ DATE _____


CITY PLANNER _____ DATE _____

GREY WOLF ARCHITECTURE

ARCHITECTURE PLANNING
INTERIOR DESIGN
1543 Champa St. #200
Denver, CO 80202
ph: 303.292.9107
fax: 303.292.4297
www.greywolfstudio.com

Bighorn Consulting
Engineers, Inc.

Mechanical &
Electrical
Engineers



386 Indian Road
Grand Junction, CO 81501
Phone (970) 241-8709

THE PINES AT OXBOW

THE PINES AT OXBOW CROSSING

LIGHTING -
IES
FOOTCANDLE
SITE PLAN

IES1-1

Project		Catalog #		Type	
Prepared by		Notes		Date	



McGraw-Edison

GLEON Galleon

Area / Site Luminaire

Product Features




Interactive Menu

- Ordering Information page 2
- Mounting Details page 3
- Optical Distributions page 4
- Product Specifications page 4
- Energy and Performance Data page 4
- Control Options page 9

Quick Facts

- Lumen packages range from 4,200 - 80,800 (34W - 640W)
- Efficacy up to 156 lumens per watt
- Options to meet Buy American and other domestic preference requirements

Dimensional Details

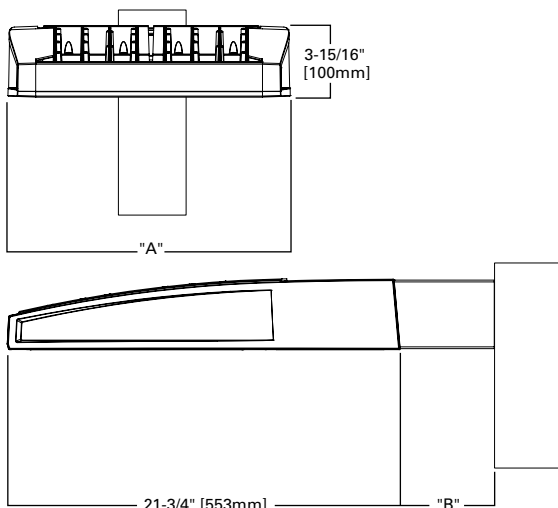

NOTES:
1. Visit <https://www.designlights.org/search/> to confirm qualification. Not all product variations are DLC qualified.
2. IDA Certified for 3000K CCT and warmer only.

Product Certifications



Connected Systems

- WaveLinx
- Enlighted

Number of Light Squares	"A" Width	"B" Standard Arm Length	"B" Extended Arm Length ¹	"B" Quick Mount Arm Length	"B" Quick Mount Extended Arm Length
1-4	15-1/2"	7"	10"	10-5/8"	16-9/16"
5-6	21-5/8"	7"	10"	10-5/8"	16-9/16"
7-8	27-5/8"	7"	13"	10-5/8"	—
9-10	33-3/4"	7"	16"	—	—

NOTES:
For arm selection requirements and additional line art, see Mounting Details section.

Ordering Information

SAMPLE NUMBER: GLEON-SA4C-740-U-T4FT-GM

Product Family ^{1,2}	Light Engine		Color Temperature	Voltage	Distribution	Mounting	Finish	
	Configuration	Drive Current						
GLEON =Galleon BAA-GLEON =Galleon, Buy American Act Compliant ³⁵ TAA-GLEON =Galleon, Trade Agreements Act Compliant ²⁸	SA1 =1 Square SA2 =2 Squares SA3 =3 Squares SA4 =4 Squares SA5 =5 Squares ⁴ SA6 =6 Squares SA7 =7 Squares ⁵ SA8 =8 Squares ⁵ SA9 =9 Squares ⁶ SA0 =10 Squares ⁶	A =600mA B =800mA C =1000mA D =1200mA ¹⁶	722 =70CRI, 2200K 727 =70CRI, 2700K 730 =70CRI, 3000K 735 =70CRI, 3500K 740 =70CRI, 4000K 750 =70CRI, 5000K 760 =70CRI, 6000K 827 =80CRI, 2700K 830 =80CRI, 3000K AMB =Amber, 590nm ^{14, 16}	U =120-277V 1 =120V 2 =208V 3 =240V 4 =277V 8 =480V ^{7, 8} 9 =347V ⁷	T2 =Type II T2R =Type II Roadway T3 =Type III T3R =Type III Roadway T4FT =Type IV Forward Throw T4W =Type IV Wide 5NQ =Type V Narrow 5MQ =Type V Square Medium 5WQ =Type V Square Wide SL2 =Type II w/Spill Control SL3 =Type III w/Spill Control SL4 =Type IV w/Spill Control SLL =90° Spill Light Eliminator Left SLR =90° Spill Light Eliminator Right RW =Rectangular Wide Type I AFL =Automotive Frontline	[Blank] =Arm for Round or Square Pole EA =Extended Arm ⁹ MA =Mast Arm Adapter ¹⁰ WM =Wall Mount QM =Quick Mount Arm (Standard Length) ¹¹ QMEA =Quick Mount Arm (Extended Length) ¹²	AP =Grey BZ =Bronze BK =Black DP =Dark Platinum GM =Graphite Metallic WH =White RALXX =Custom Color	
Options (Add as Suffix)			Controls and Systems Options (Add as Suffix)			Accessories (Order Separately) ³⁶		
DIM =External 0-10V Dimming Leads ^{19, 20} F =Single Fuse (120, 277 or 347V Specify Voltage) FF =Double Fuse (208, 240 or 480V Specify Voltage) 20K =Series 20KV UL 1449 Surge Protective Device 2L =Two Circuits ^{17, 18} HA =50°C High Ambient HSS =Installed House Side Shield ²⁸ GRSBK =Glare Reducing Shield, Black ²³ GRSWH =Glare Reducing Shield, White ²³ LCF =Light Square Trim Painted to Match Housing ²⁷ MT =Installed Mesh Top TH =Tool-less Door Hardware CC =Coastal Construction finish ³ L90 =Optics Rotated 90° Left R90 =Optics Rotated 90° Right CE =CE Marking ²⁹ AHD145 =After Hours Dim, 5 Hours ²² AHD245 =After Hours Dim, 6 Hours ²² AHD255 =After Hours Dim, 7 Hours ²² AHD355 =After Hours Dim, 8 Hours ²² DALI =DALI Drivers			BPC =Button Type Photocontrol PR =NEMA 3-PIN Photocontrol Receptacle PR7 =NEMA 7-PIN Photocontrol Receptacle ²¹ SPB2 =Dimming Occupancy Sensor with Bluetooth Interface, 8' - 20' Mounting ³⁴ SPB4 =Dimming Occupancy Sensor with Bluetooth Interface, 21' - 40' Mounting ³⁴ MS-L20 =Motion Sensor for ON/OFF Operation, 9' - 20' Mounting Height ²⁴ MS-L40W =Motion Sensor for ON/OFF Operation, 21' - 40' Mounting Height ²⁴ MS/X-L20 =Bi-Level Motion Sensor, 9' - 20' Mounting Height ^{24, 25} MS/Y-L40W =Bi-Level Motion Sensor, 21' - 40' Mounting Height ^{24, 25} MS/DIM-L20 =Motion Sensor for Dimming Operation, 9' - 20' Mounting Height ²⁴ MS/DIM-L40W =Motion Sensor for Dimming Operation, 21' - 40' Mounting Height ²⁴ ZW =WaveLinX-enabled 4-PIN Twistlock Receptacle ZD =SR Driver-enabled 4-PIN Twistlock Receptacle ZW-WOBXX =WaveLinX Lite, Dimming Motion and Daylight, Bluetooth Programmable, 7' - 15' Mounting ^{13,32,33} ZW-WOFXX =WaveLinX Lite, Dimming Motion and Daylight, Bluetooth Programmable, 15' - 40' Mounting ^{13,32,33} ZD-WOBXX =WaveLinX Lite, SR Driver, Dimming Motion and Daylight, Bluetooth Programmable, 7' - 15' Mounting ^{13,32} ZD-WOFXX =WaveLinX Lite, SR Driver, Dimming Motion and Daylight, Bluetooth Programmable, 15' - 40' Mounting ^{13,32} ZW-SWPD4XX =WaveLinX Pro, Dimming Motion and Daylight, WAC Programmable, 7' - 15' Mounting ^{13,32,33} ZW-SWPD5XX =WaveLinX Pro, Dimming Motion and Daylight, WAC Programmable, 15' - 40' Mounting ^{13,32,33} ZD-SWPD4XX =WaveLinX Pro, SR Driver, Dimming Motion and Daylight, WAC Programmable, 7' - 15' Mounting ^{13,32,33} ZD-SWPD5XX =WaveLinX Pro, SR Driver, Dimming Motion and Daylight, WAC Programmable, 15' - 40' Mounting ^{13,32,33} LWR-LW =Enlightened Sensor, 8' - 16' Mounting Height ²⁶ LWR-LN =Enlightened Sensor, 16' - 40' Mounting Height ²⁶ DIM10-MS/DIM-L08 =Synapse Occupancy Sensor (<8' Mounting) ¹⁹ DIM10-MS/DIM-L20 =Synapse Occupancy Sensor (9'-20' Mounting) ¹⁹ DIM10-MS/DIM-L40 =Synapse Occupancy Sensor (21'-40' Mounting) ¹⁹			OA/RA1016 =NEMA Photocontrol Multi-Tap - 105-285V OA/RA1027 =NEMA Photocontrol - 480V OA/RA1201 =NEMA Photocontrol - 347V OA/RA1013 =Photocontrol Shorting Cap OA/RA1014 =120V Photocontrol MA1252 =10kV Surge Module Replacement MA1036-XX =Single Tenon Adapter for 2-3/8" O.D. Tenon MA1037-XX =2@180° Tenon Adapter for 2-3/8" O.D. Tenon MA1197-XX =3@120° Tenon Adapter for 2-3/8" O.D. Tenon MA1188-XX =4@90° Tenon Adapter for 2-3/8" O.D. Tenon MA1189-XX =2@90° Tenon Adapter for 2-3/8" O.D. Tenon MA1190-XX =3@90° Tenon Adapter for 2-3/8" O.D. Tenon MA1191-XX =2@120° Tenon Adapter for 2-3/8" O.D. Tenon MA1038-XX =Single Tenon Adapter for 3-1/2" O.D. Tenon MA1039-XX =2@180° Tenon Adapter for 3-1/2" O.D. Tenon MA1192-XX =3@120° Tenon Adapter for 3-1/2" O.D. Tenon MA1193-XX =4@90° Tenon Adapter for 3-1/2" O.D. Tenon MA1194-XX =2@90° Tenon Adapter for 3-1/2" O.D. Tenon MA1195-XX =3@90° Tenon Adapter for 3-1/2" O.D. Tenon FSIR-100 =Wireless Configuration Tool for Occupancy Sensor ²⁴ GLEON-MT1 =Field Installed Mesh Top for 1-4 Light Squares GLEON-MT2 =Field Installed Mesh Top for 5-6 Light Squares GLEON-MT3 =Field Installed Mesh Top for 7-8 Light Squares GLEON-MT4 =Field Installed Mesh Top for 9-10 Light Squares GLEON-QM =Quick Mount Arm Kit ¹¹ GLEON-QMEA =Quick Mount Extended Arm Kit ¹² LS/HSS =Field Installed House Side Shield ^{28, 30} LS/GRSBK-2PK =Glare Reducing Shield, Black ^{23, 30} LS/GRSWH-2PK =Glare Reducing Shield, White ^{23, 30} LS/PFS =Perimeter Shield, Black ¹⁵ WOLC-7P-10A =WaveLinX Outdoor Control Module ^{19, 31} WOB-XX = WaveLinX Lite Sensor, Dimming Motion and Daylight, Bluetooth Programmable, 7' - 15' Mounting ^{13,32} WOF-XX = WaveLinX Lite Sensor, Dimming Motion and Daylight, Bluetooth Programmable, 15' - 40' Mounting ^{13,32} SWPD4-XX = WaveLinX Sensor, Dimming Motion and Daylight, WAC Programmable, 7' - 15' Mounting ^{13,19,32,33} SWPD5-XX = WaveLinX Sensor, Dimming Motion and Daylight, WAC Programmable, 15' - 40' Mounting ^{13,19,32,33}		
NOTES: 1. Customer is responsible for engineering analysis to confirm pole and fixture compatibility for all applications. Refer to our white paper WP513001EN for additional support information. 2. DesignLights Consortium® Qualified. Refer to www.designlights.org Qualified Products List under Family Models for details. 3. Coastal construction finish salt spray tested to over 5,000-hours per ASTM B117, with a scribe rating of 9 per ASTM D1654. Not available with TH option. 4. Not compatible with MS/4-LXX or MS/1-LXX sensors. 5. Not compatible with extended quick mount arm (QMEA). 6. Not compatible with standard quick mount arm (QM) or extended quick mount arm (QMEA). 7. Requires the use of an internal step down transformer when combined with sensor options. Not available with sensor at 1200mA. Not available in combination with the HA high ambient and sensor options at 1A. 8. 480V must utilize Wye system only. Per NEC, not for use with ungrounded systems, impedance grounded systems or corner grounded systems (commonly known as Three Phase Three Wire Delta, Three Phase High Leg Delta and Three Phase Corner Grounded Delta systems.) 9. May be required when two or more luminaires are oriented on a 90° or 120° drilling pattern. Refer to arm mounting requirement table. 10. Factory installed. 11. Maximum 8 light squares. 12. Maximum 6 light squares. 13. Requires ZW or ZD receptacle. 14. Narrow-band 590nm +/- 5nm for wildlife and observatory use. Choose drive current A; supplied at 500mA drive current only. Available with 5WQ, 5MQ, SL2, SL3 and SL4 distributions. Can be used with HSS option. 15. Set of 4 pcs. One set required per Light Square. 16. Not available with HA option. 17. 2L is not available with MS, MS/X or MS/DIM at 347V or 480V. 2L in SA2 through SA4 requires a larger housing, normally used for SA5 or SA6. Extended arm option may be required when mounting two or more fixtures per pole at 90° or 120°. Refer to arm mounting requirement table. 18. Not available with Enlightened wireless sensors. 19. Cannot be used with other control options. 20. Low voltage control lead brought out 18" outside fixture. 21. Not available if any "MS" sensor is selected. Motion sensor has an integral photocell. 22. Requires the use of BPC photocontrol or the PR7 or PR photocontrol receptacle with photocontrol accessory. See After Hours Dim supplemental guide for additional information. 23. Not for use with T4FT, T4W or SL4 optics. See IES files for details. 24. The FSIR-100 configuration tool is required to adjust parameters including high and low modes, sensitivity, time delay, cutoff and more. Consult your lighting representative at Cooper Lighting Solutions for more information. 25. Replace X with number of Light Squares operating in low output mode. 26. Enlightened wireless sensors are factory installed only requiring network components LWP-EM-1, LWP-GW-1 and LWP-PoE8 in appropriate quantities. 27. Not available with house side shield (HSS). 28. Not for use with 5NQ, 5MQ, 5WQ or RW optics. A black trim plate is used when HSS is selected. 29. CE is not available with the LWR, MS, MS/X, MS/DIM, BPC, PR or PR7 options. Available in 120-277V only. 30. One required for each Light Square. 31. Requires PR7. 32. Replace XX with sensor color (WH, BZ or BK.) 33. WAC Gateway required to enable field-configurability: Order WAC-PoE and WPOE-120 (10V to PoE injector) power supply if needed. 34. Smart device with mobile application required to change system defaults. See controls section for details. 35. Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to DOMESTIC PREFERENCES website for more information. Components shipped separately may be separately analyzed under domestic preference requirements. 36. For BAA or TAA requirements, Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.								


LumenSafe Integrated Network Security Camera Technology Options (Add as Suffix)

Product Family	Camera Type	Data Backhaul
L =LumenSafe Technology 	D =Standard Dome Camera H =Hi-Res Dome Camera Z =Remote PTZ Camera	C =Cellular, No SIM A =Cellular, AT&T V =Cellular, Verizon S =Cellular, Sprint R =Cellular, Rogers W =Wi-Fi Networking w/ Omni-Directional Antenna E =Ethernet Networking


Mounting Details

Standard Arm (Drilling Pattern)


TYPE "N"




Quick Mount Arm (Includes fixture adapter)




QM and QMEA Pole Mount

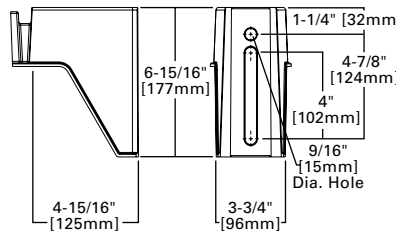


QML Pole Mount

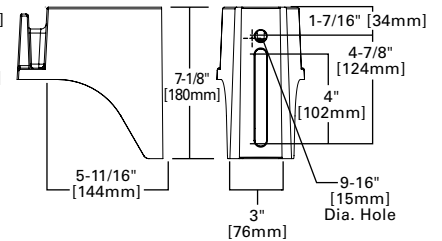


QM Quick Mount Arm (Standard)

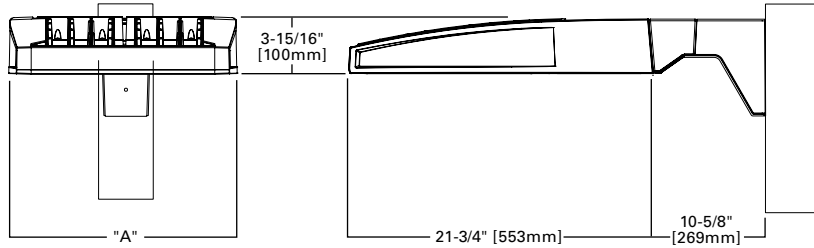


QMEA Quick Mount Arm (Extended)

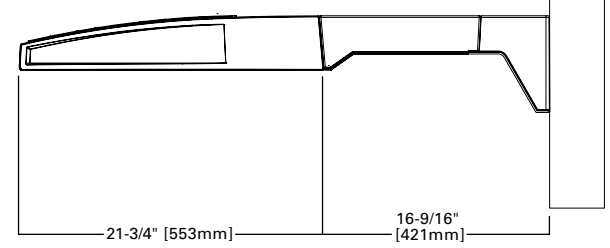

Standard Wall Mount




Mast Arm Mount

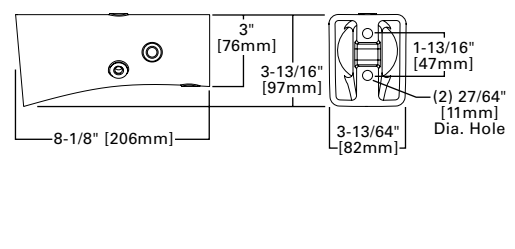

Arm Mounting Requirements

Number of Light Squares	Standard Arm @ 90° Apart	Standard Arm @ 120° Apart	Quick Mount Arm @ 90° Apart	Quick Mount Arm @ 120° Apart
1	Standard	Standard	QM Extended	Quick Mount
2	Standard	Standard	QM Extended	Quick Mount
3	Standard	Standard	QM Extended	Quick Mount
4	Standard	Standard	QM Extended	Quick Mount
5	Extended	Standard	QM Extended	Quick Mount
6	Extended	Standard	QM Extended	Quick Mount
7	Extended	Extended	--	Quick Mount
8	Extended	Extended	--	Quick Mount
9	Extended	Extended	--	--
10	Extended	Extended	--	--

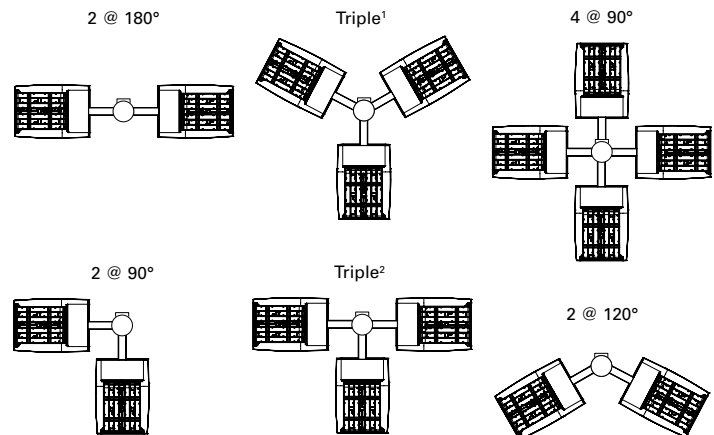


NOTES: 1 Round poles are 3 @ 120°. Square poles are 3 @ 90°. 2 Round poles are 3 @ 90°. 3 Shown with 4 square configurations

Fixture Weights and EPAs

Number of Light Squares	Weight with Standard and Extended Arm (lbs.)	EPA with Standard and Extended Arm (Sq. Ft.)	Weight with QM Arm (lbs.)	EPA with QM Arm (Sq. Ft.)	Weight with QML (lbs.)	EPA with QML (Sq. Ft.)	Weight with QMEA (lbs.)	EPA with QMEA (Sq. Ft.)
1-4	33	0.96	35	1.11	--	--	38	1.11
5-6	44	1.00	46	1.11	--	--	49	1.11
7-8	54	1.07	56	1.11	58	1.11	--	--
9-10	63	1.12	--	--	67	1.11	--	--

Optical Distributions

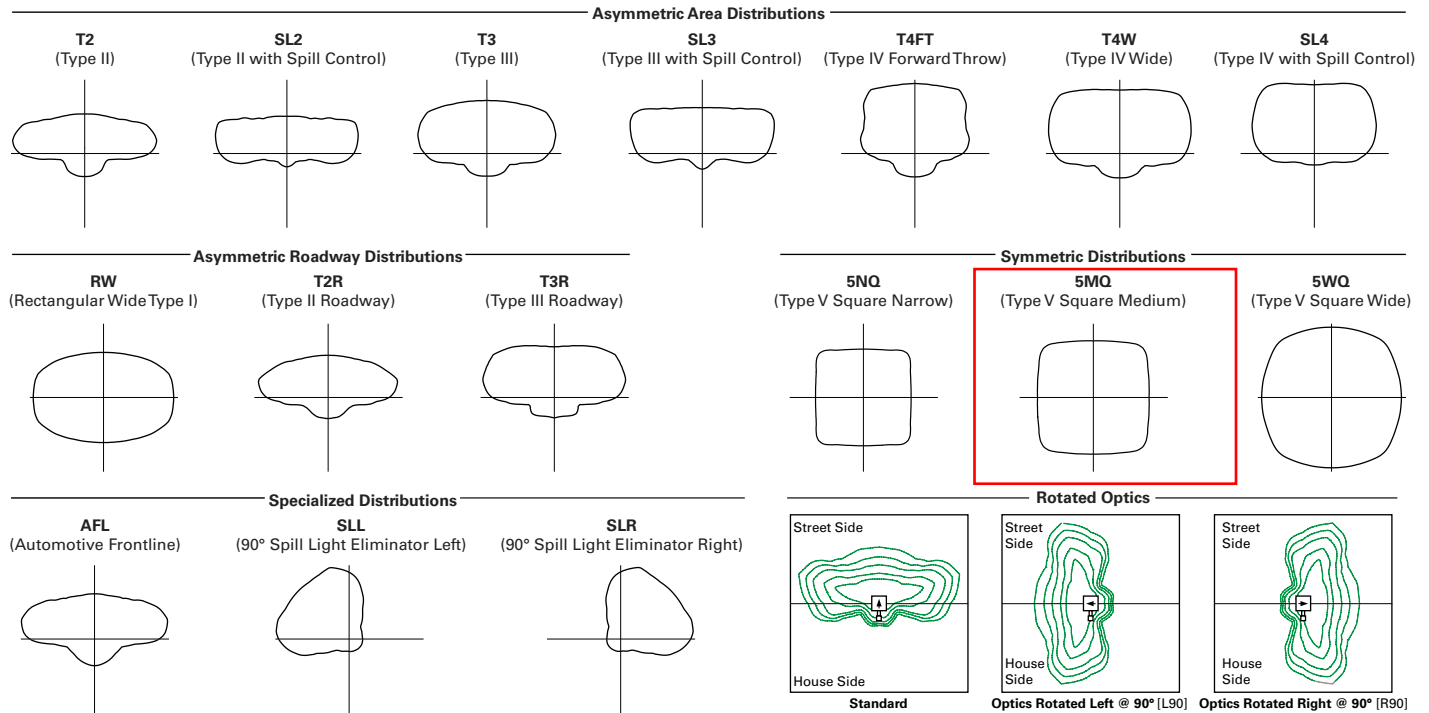

Product Specifications

Construction

- Extruded aluminum driver enclosure
- Heavy-wall, die-cast aluminum end caps
- Die-cast aluminum heat sinks
- Patent pending interlocking housing and heat sink

Optics

- Patented, high-efficiency injection-molded AccuLED Optics technology
- 16 optical distributions
- 3 shielding options including HSS, GRS and PFS
- IDA Certified (3000K CCT and warmer only)

Electrical

- LED drivers are mounted to removable tray

assembly for ease of maintenance

- Standard with 0-10V dimming
- Standard with Cooper Lighting Solutions proprietary circuit module designed to withstand 10kV of transient line surge
- Suitable for operation in -40°C to 40°C ambient environments. Optional 50°C high ambient (HA) configuration.

Mounting

- Standard extruded arm includes internal bolt guides and round pole adapter
- Extended arms (EA and QMEA) may be required in 90° or 120° pole mount configurations, see arm mounting requirements table

- Mast arm (MA) factory installed

- Wall mount (WM) option available

- Quick mount arm (QM and QMEA) includes pole adapter and factory installed fixture mount for fast installation to square or round poles

Finish

- Super housing durable TGIC polyester powder coat paint, 2.5 mil nominal thickness
- Heat sink is powder coated black
- RAL and custom color matches available
- Coastal Construction (CC) option available

Warranty

- Five year warranty

Energy and Performance Data

Lumen Maintenance (TM-21)

Drive Current	Ambient Temperature	25,000 hours*	50,000 hours*	60,000 hours*	100,000 hours**	Theoretical L70 hours**
Up to 1A	25°C	99.4%	99.0%	98.9%	98.3%	> 2.4M
	40°C	98.7%	98.3%	98.1%	97.4%	> 1.9M
	50°C	98.2%	97.2%	96.8%	95.2%	> 851,000
1.2A	25°C	99.4%	99.0%	98.9%	98.3%	> 2.4M
	40°C	98.5%	97.9%	97.7%	96.7%	> 1.3M

* Supported by IES TM-21 standards

** Theoretical values represent estimations commonly used; however, refer to the IES position on LED Product Lifetime Prediction, IES PS-10-18, explaining proper use of IES TM-21 and LM-80.

Lumen Multiplier

Ambient Temperature	Lumen Multiplier
0°C	1.02
10°C	1.01
25°C	1.00
40°C	0.99
50°C	0.97



View GLEON IES files

Nominal Power Lumens (1.2A)

 Supplemental Performance Guide**

Number of Light Squares		1	2	3	4	5	6	7	8	9	10
Nominal Power (Watts)		67	129	191	258	320	382	448	511	575	640
Input Current @ 120V (A)		0.58	1.16	1.78	2.31	2.94	3.56	4.09	4.71	5.34	5.87
Input Current @ 208V (A)		0.33	0.63	0.93	1.27	1.57	1.87	2.22	2.52	2.8	3.14
Input Current @ 240V (A)		0.29	0.55	0.80	1.10	1.35	1.61	1.93	2.18	2.41	2.71
Input Current @ 277V (A)		0.25	0.48	0.70	0.96	1.18	1.39	1.69	1.90	2.09	2.36
Input Current @ 347V (A)		0.20	0.39	0.57	0.78	0.96	1.15	1.36	1.54	1.72	1.92
Input Current @ 480V (A)		0.15	0.30	0.43	0.60	0.73	0.85	1.03	1.16	1.28	1.45
Optics											
T2	4000K Lumens	7,972	15,580	23,245	30,714	38,056	45,541	53,857	61,024	68,072	75,366
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	119	121	122	119	119	119	120	119	118	118
T2R	4000K Lumens	8,462	16,539	24,680	32,609	40,401	48,348	57,176	64,783	72,266	80,010
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	126	128	129	126	126	127	128	127	126	125
T3	4000K Lumens	8,125	15,879	23,693	31,307	38,787	46,417	54,893	62,197	69,381	76,818
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	121	123	124	121	121	122	123	122	121	120
T3R	4000K Lumens	8,306	16,232	24,220	32,001	39,651	47,447	56,114	63,580	70,924	78,523
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	124	126	127	124	124	124	125	124	123	123
T4FT	4000K Lumens	8,173	15,970	23,831	31,488	39,014	46,686	55,212	62,558	69,783	77,261
	BUG Rating	B1-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	122	124	125	122	122	122	123	122	121	121
T4W	4000K Lumens	8,067	15,764	23,522	31,080	38,510	46,082	54,499	61,751	68,881	76,263
	BUG Rating	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5
	Lumens per Watt	120	122	123	120	120	121	122	121	120	119
SL2	4000K Lumens	7,958	15,552	23,206	30,662	37,989	45,462	53,763	60,920	67,952	75,235
	BUG Rating	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	119	121	121	119	119	119	120	119	118	118
SL3	4000K Lumens	8,124	15,877	23,690	31,302	38,784	46,410	54,885	62,189	69,372	76,805
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	121	123	124	121	121	121	123	122	121	120
SL4	4000K Lumens	7,719	15,085	22,510	29,741	36,850	44,097	52,148	59,089	65,913	72,977
	BUG Rating	B1-U0-G3	B2-U0-G4	B2-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	115	117	118	115	115	115	116	116	115	114
5NQ	4000K Lumens	8,380	16,375	24,436	32,287	40,003	47,870	56,610	64,144	71,552	79,221
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	125	127	128	125	125	125	126	126	124	124
5MQ	4000K Lumens	8,534	16,676	24,885	32,881	40,739	48,752	57,653	65,326	72,868	80,679
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	127	129	130	127	127	128	129	128	127	126
5WQ	4000K Lumens	8,556	16,723	24,951	32,968	40,847	48,881	57,808	65,499	73,063	80,894
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	128	130	131	128	128	128	129	128	127	126
SLL/ SLR	4000K Lumens	7,140	13,951	20,817	27,506	34,081	40,783	48,231	54,649	60,959	67,492
	BUG Rating	B1-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	107	108	109	107	107	107	108	107	106	105
RW	4000K Lumens	8,304	16,228	24,215	31,994	39,641	47,437	56,100	63,566	70,907	78,504
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5
	Lumens per Watt	124	126	127	124	124	124	125	124	123	123
AFL	4000K Lumens	8,335	16,287	24,302	32,110	39,784	47,610	56,303	63,796	71,163	78,790
	BUG Rating	B1-U0-G1	B2-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G4	B4-U0-G4	B4-U0-G4	B4-U0-G5
	Lumens per Watt	124	126	127	124	124	125	126	125	124	123

* Nominal data for 70 CRI. ** For additional performance data, please reference the Galleon Supplemental Performance Guide.

Nominal Power Lumens (1A)

 Supplemental Performance Guide**

Number of Light Squares		1	2	3	4	5	6	7	8	9	10
Nominal Power (Watts)		59	113	166	225	279	333	391	445	501	558
Input Current @ 120V (A)		0.51	1.02	1.53	2.03	2.55	3.06	3.56	4.08	4.60	5.07
Input Current @ 208V (A)		0.29	0.56	0.82	1.11	1.37	1.64	1.93	2.19	2.46	2.75
Input Current @ 240V (A)		0.26	0.48	0.71	0.96	1.19	0.41	1.67	1.89	2.12	2.39
Input Current @ 277V (A)		0.23	0.42	0.61	0.83	1.03	1.23	1.45	1.65	1.84	2.09
Input Current @ 347V (A)		0.17	0.32	0.50	0.64	0.82	1.00	1.14	1.32	1.50	1.68
Input Current @ 480V (A)		0.14	0.24	0.37	0.48	0.61	0.75	0.91	0.99	1.12	1.28
Optics											
T2	4000K Lumens	7,267	14,201	21,190	28,000	34,692	41,515	49,096	55,627	62,053	68,703
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	123	126	128	124	124	125	126	125	124	123
T2R	4000K Lumens	7,715	15,077	22,497	29,725	36,829	44,073	52,122	59,056	65,876	72,937
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	131	133	136	132	132	132	133	133	131	131
T3	4000K Lumens	7,408	14,475	21,598	28,539	35,358	42,313	50,039	56,698	63,246	70,024
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	126	128	130	127	127	127	128	127	126	125
T3R	4000K Lumens	7,571	14,798	22,078	29,172	36,145	43,253	51,153	57,959	64,653	71,581
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	128	131	133	130	130	130	131	130	129	128
T4FT	4000K Lumens	7,451	14,559	21,725	28,703	35,564	42,558	50,330	57,027	63,613	70,430
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	126	129	131	128	127	128	129	128	127	126
T4W	4000K Lumens	7,354	14,371	21,442	28,333	35,105	42,007	49,681	56,291	62,792	69,521
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	125	127	129	126	126	126	127	126	125	125
SL2	4000K Lumens	7,254	14,178	21,155	27,951	34,631	41,443	49,011	55,533	61,944	68,584
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	123	125	127	124	124	124	125	125	124	123
SL3	4000K Lumens	7,406	14,474	21,596	28,534	35,355	42,307	50,033	56,690	63,237	70,014
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	126	128	130	127	127	127	128	127	126	125
SL4	4000K Lumens	7,037	13,751	20,519	27,112	33,592	40,198	47,538	53,864	60,087	66,524
	BUG Rating	B1-U0-G3	B2-U0-G4	B2-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	119	122	124	120	120	121	122	121	120	119
5NQ	4000K Lumens	7,640	14,928	22,275	29,431	36,465	43,637	51,606	58,472	65,226	72,218
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	129	132	134	131	131	131	132	131	130	129
5MQ	4000K Lumens	7,779	15,203	22,684	29,973	37,137	44,441	52,555	59,549	66,427	73,545
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	132	135	137	133	133	133	134	134	133	132
5WQ	4000K Lumens	7,800	15,243	22,744	30,052	37,236	44,560	52,697	59,708	66,603	73,742
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	132	135	137	134	133	134	135	134	133	132
SLL/ SLR	4000K Lumens	6,510	12,719	18,977	25,075	31,067	37,176	43,967	49,817	55,569	61,525
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	110	113	114	111	111	112	112	112	111	110
RW	4000K Lumens	7,570	14,793	22,073	29,165	36,137	43,243	51,140	57,945	64,637	71,564
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5
	Lumens per Watt	128	131	133	130	130	130	131	130	129	128
AFL	4000K Lumens	7,598	14,847	22,154	29,272	36,267	43,400	51,326	58,156	64,872	71,824
	BUG Rating	B1-U0-G1	B2-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G4	B4-U0-G4	B4-U0-G4	B4-U0-G4
	Lumens per Watt	129	131	133	130	130	130	131	131	129	129

* Nominal data for 70 CRI. ** For additional performance data, please reference the Galleon Supplemental Performance Guide.

Nominal Power Lumens (800mA)

 Supplemental Performance Guide**

Number of Light Squares		1	2	3	4	5	6	7	8	9	10
Nominal Power (Watts)		44	85	124	171	210	249	295	334	374	419
Input Current @ 120V (A)		0.39	0.77	1.13	1.54	1.90	2.26	2.67	3.03	3.39	3.80
Input Current @ 208V (A)		0.22	0.44	0.62	0.88	1.06	1.24	1.50	1.68	1.87	2.12
Input Current @ 240V (A)		0.19	0.38	0.54	0.76	0.92	1.08	1.30	1.46	1.62	1.84
Input Current @ 277V (A)		0.17	0.36	0.47	0.72	0.83	0.95	1.19	1.31	1.42	1.67
Input Current @ 347V (A)		0.15	0.24	0.38	0.49	0.63	0.77	0.87	1.01	1.15	1.52
Input Current @ 480V (A)		0.11	0.18	0.29	0.37	0.48	0.59	0.66	0.77	0.88	0.96
Optics											
T2	4000K Lumens	5,871	11,474	17,121	22,622	28,029	33,542	39,667	44,944	50,134	55,508
	BUG Rating	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	133	135	138	132	133	135	134	135	134	132
T2R	4000K Lumens	6,233	12,181	18,176	24,016	29,756	35,608	42,111	47,714	53,224	58,929
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5
	Lumens per Watt	142	143	147	140	142	143	143	143	142	141
T3	4000K Lumens	5,986	11,695	17,450	23,057	28,568	34,186	40,430	45,809	51,099	56,576
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	136	138	141	135	136	137	137	137	137	135
T3R	4000K Lumens	6,117	11,955	17,838	23,569	29,203	34,946	41,328	46,827	52,235	57,832
	BUG Rating	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	139	141	144	138	139	140	140	140	140	138
T4FT	4000K Lumens	6,019	11,763	17,551	23,190	28,734	34,384	40,663	46,074	51,396	56,904
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	137	138	142	136	137	138	138	138	137	136
T4W	4000K Lumens	5,942	11,610	17,324	22,891	28,363	33,940	40,138	45,480	50,732	56,169
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	135	137	140	134	135	136	136	136	136	134
SL2	4000K Lumens	5,862	11,454	17,091	22,583	27,980	33,484	39,598	44,867	50,048	55,411
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	133	135	138	132	133	134	134	134	134	132
SL3	4000K Lumens	5,985	11,694	17,447	23,053	28,565	34,182	40,424	45,804	51,092	56,568
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	136	138	141	135	136	137	137	137	137	135
SL4	4000K Lumens	5,685	11,111	16,577	21,905	27,140	32,478	38,409	43,520	48,546	53,748
	BUG Rating	B1-U0-G2	B1-U0-G3	B2-U0-G4	B2-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	129	131	134	128	129	130	130	130	130	128
5NQ	4000K Lumens	6,172	12,061	17,997	23,778	29,462	35,256	41,694	47,242	52,699	58,347
	BUG Rating	B2-U0-G1	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4
	Lumens per Watt	140	142	145	139	140	142	141	141	141	139
5MQ	4000K Lumens	6,285	12,283	18,328	24,217	30,004	35,907	42,462	48,112	53,669	59,421
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5
	Lumens per Watt	143	145	148	142	143	144	144	144	144	142
5WQ	4000K Lumens	6,303	12,317	18,377	24,281	30,085	36,001	42,575	48,241	53,812	59,579
	BUG Rating	B3-U0-G1	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	143	145	148	142	143	145	144	144	144	142
SLL/ SLR	4000K Lumens	5,260	10,276	15,332	20,259	25,101	30,037	35,522	40,249	44,898	49,708
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	120	121	124	118	120	121	120	121	120	119
RW	4000K Lumens	6,116	11,952	17,834	23,563	29,196	34,938	41,317	46,817	52,224	57,819
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	139	141	144	138	139	140	140	140	140	138
AFL	4000K Lumens	6,139	11,996	17,899	23,650	29,302	35,064	41,468	46,987	52,412	58,030
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G4	B4-U0-G4
	Lumens per Watt	140	141	144	138	140	141	141	141	140	138

* Nominal data for 70 CRI. ** For additional performance data, please reference the Galleon Supplemental Performance Guide.

Nominal Power Lumens (600mA)

 Supplemental Performance Guide**

Number of Light Squares		1	2	3	4	5	6	7	8	9	10
Nominal Power (Watts)		34	66	96	129	162	193	226	257	290	323
Input Current @ 120V (A)		0.30	0.58	0.86	1.16	1.44	1.73	2.03	2.33	2.59	2.89
Input Current @ 208V (A)		0.17	0.34	0.49	0.65	0.84	0.99	1.14	1.30	1.48	1.63
Input Current @ 240V (A)		0.15	0.30	0.43	0.56	0.74	0.87	1.00	1.13	1.30	1.43
Input Current @ 277V (A)		0.14	0.28	0.41	0.52	0.69	0.81	0.93	1.04	1.22	1.33
Input Current @ 347V (A)		0.11	0.19	0.30	0.39	0.49	0.60	0.69	0.77	0.90	0.99
Input Current @ 480V (A)		0.08	0.15	0.24	0.30	0.38	0.48	0.53	0.59	0.71	0.77
Optics											
T2	4000K Lumens	4,787	9,357	13,961	18,448	22,856	27,353	32,347	36,651	40,884	45,265
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	141	142	145	143	141	142	143	143	141	140
T2R	4000K Lumens	5,083	9,934	14,822	19,585	24,266	29,038	34,341	38,911	43,404	48,055
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5
	Lumens per Watt	150	151	154	152	150	150	152	151	150	149
T3	4000K Lumens	4,880	9,537	14,231	18,803	23,296	27,878	32,970	37,358	41,671	46,137
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	144	145	148	146	144	144	146	145	144	143
T3R	4000K Lumens	4,988	9,749	14,547	19,220	23,814	28,497	33,703	38,188	42,598	47,162
	BUG Rating	B1-U0-G2	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	147	148	152	149	147	148	149	149	147	146
T4FT	4000K Lumens	4,909	9,591	14,312	18,911	23,432	28,040	33,161	37,574	41,913	46,404
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	144	145	149	147	145	145	147	146	145	144
T4W	4000K Lumens	4,845	9,468	14,128	18,668	23,130	27,678	32,732	37,088	41,371	45,805
	BUG Rating	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	143	143	147	145	143	143	145	144	143	142
SL2	4000K Lumens	4,779	9,341	13,937	18,416	22,818	27,305	32,292	36,589	40,813	45,188
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	141	142	145	143	141	141	143	142	141	140
SL3	4000K Lumens	4,879	9,536	14,229	18,800	23,294	27,874	32,965	37,351	41,666	46,130
	BUG Rating	B1-U0-G2	B1-U0-G3	B2-U0-G3	B2-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	144	144	148	146	144	144	146	145	144	143
SL4	4000K Lumens	4,637	9,059	13,519	17,863	22,132	26,486	31,322	35,490	39,589	43,831
	BUG Rating	B1-U0-G2	B1-U0-G3	B2-U0-G4	B2-U0-G4	B2-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	136	137	141	138	137	137	139	138	137	136
5NQ	4000K Lumens	5,033	9,835	14,676	19,392	24,026	28,751	34,002	38,526	42,975	47,581
	BUG Rating	B2-U0-G1	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3
	Lumens per Watt	148	149	153	150	148	149	150	150	148	147
5MQ	4000K Lumens	5,126	10,015	14,946	19,747	24,468	29,281	34,628	39,236	43,766	48,457
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	151	152	156	153	151	152	153	153	151	150
5WQ	4000K Lumens	5,139	10,043	14,985	19,801	24,533	29,359	34,721	39,339	43,883	48,586
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5
	Lumens per Watt	151	152	156	153	151	152	154	153	151	150
SLL/ SLR	4000K Lumens	4,289	8,380	12,502	16,520	20,469	24,494	28,967	32,823	36,613	40,537
	BUG Rating	B1-U0-G2	B1-U0-G3	B2-U0-G3	B2-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	126	127	130	128	126	127	128	128	126	126
RW	4000K Lumens	4,987	9,746	14,543	19,215	23,808	28,491	33,695	38,178	42,587	47,151
	BUG Rating	B2-U0-G1	B3-U0-G1	B4-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4
	Lumens per Watt	147	148	151	149	147	148	149	149	147	146
AFL	4000K Lumens	5,007	9,782	14,597	19,285	23,896	28,594	33,817	38,317	42,742	47,322
	BUG Rating	B1-U0-G1	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3
	Lumens per Watt	147	148	152	149	148	148	150	149	147	147

* Nominal data for 70 CRI. ** For additional performance data, please reference the Galleon Supplemental Performance Guide.

Control Options

0-10V (DIM)

This fixture is offered standard with 0-10V dimming driver(s). The DIM option provides 0-10V dimming wire leads for use with a lighting control panel or other control method.

Photocontrol (BPC, PR and PR7)




Optional button-type photocontrol (BPC) and photocontrol receptacles (PR and PR7) provide a flexible solution to enable “dusk-to-dawn” lighting by sensing light levels. Advanced control systems compatible with NEMA 7-pin standards can be utilized with the PR7 receptacle.

After Hours Dim (AHD)

This feature allows photocontrol-enabled luminaires to achieve additional energy savings by dimming during scheduled portions of the night. The dimming profile will automatically take effect after a “dusk-to-dawn” period has been calculated from the photocontrol input. Specify the desired dimming profile for a simple, factory-shipped dimming solution requiring no external control wiring. Reference the After Hours Dim supplemental guide for additional information.



Dimming Occupancy Sensor (SPB, MS/DIM-LXX, MS/X-LXX and MS-LXX)

These sensors are factory installed in the luminaire housing. When the SPB or MS/DIM sensor options are selected, the occupancy sensor is connected to a dimming driver and the entire luminaire dims when there is no activity detected. When activity is detected, the luminaire returns to full light output. The MS/DIM sensor is factory preset to dim down to approximately 50 percent power with a time delay of five minutes. The MS-LXX sensor is factory preset to turn the luminaire off after five minutes of no activity. The MS/X-LXX is also preset for five minutes and only controls the specified number of light engines to maintain steady output from the remaining light engines. SPB motion sensors require the Sensor Configuration mobile application by Wattstopper to change factory default dimming level, time delay, sensitivity and other parameters. Available for iOS and Android devices. The SPB sensor is factory preset to dim down to approximately 10% power with a time delay of five minutes. The MS/DIM occupancy sensors require the FSIR-100 programming tool to adjust factory defaults.

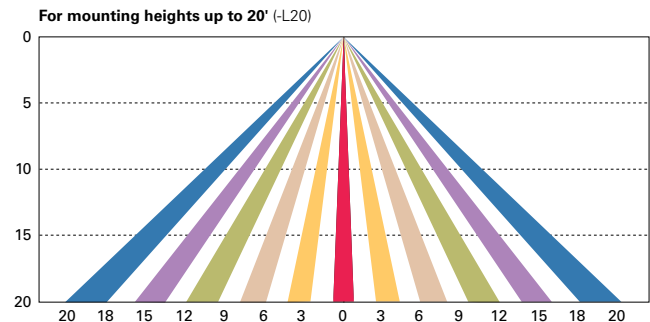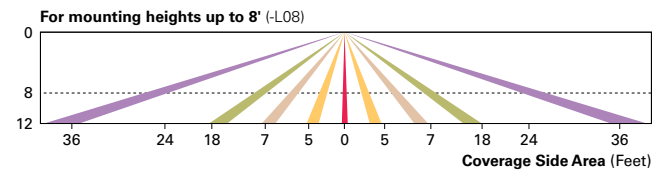

Enlighted Wireless Control and Monitoring System (LWR-LW and LWR-LN)

Enlighted is a connected lighting solution that combines a broad selection of energy-efficient LED luminaires with a powerful integrated wireless sensor system. The sensor controls the lighting system in compliance with the latest energy codes and collects valuable data about building performance and use. Software applications turn the granular data into information through energy dashboards and specialized apps that make it simple and help optimize the use of building resources, beyond lighting.

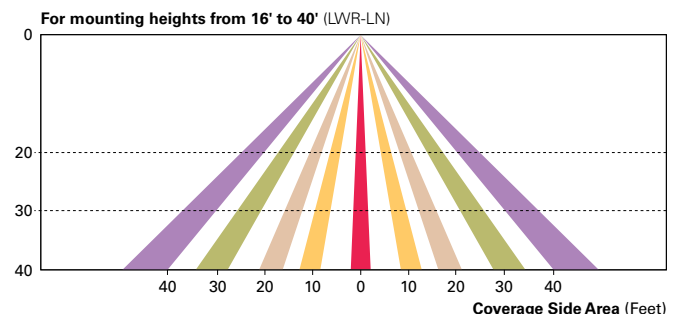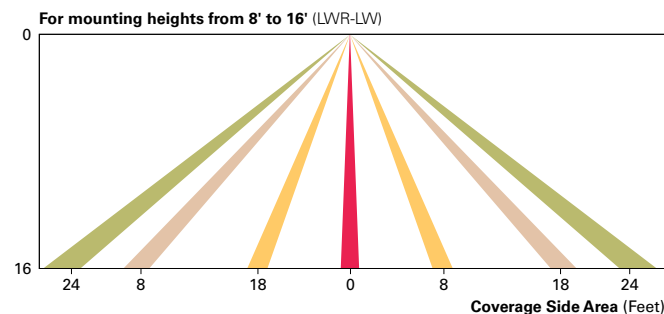

WaveLinx Wireless Outdoor Lighting Control Module (WOLC-7P-10A)

The 7-pin wireless outdoor lighting control module enables WaveLinx to control outdoor area, site and flood lighting. WaveLinx controls outdoor lighting using schedules to provide ON, OFF and dimming controls based on astronomic or time schedules based on a 7 day week.

LumenSafe Integrated Network Security Camera (LD)

Cooper Lighting Solutions brings ease of camera deployment to a whole new level. No additional wiring is needed beyond providing line power to the luminaire. A variety of networking options allows security integrators to design the optimal solution for active surveillance. As the ideal solution to meet the needs for active surveillance, the LumenSafe integrated network camera is a streamlined, outdoor-ready fixed dome that provides HDTV 1080p video. This IP camera is optimally designed for deployment in the video management system or security software platform of choice.

Synapse (DIM10)

SimplySNAP integrated wireless controls system by Synapse. Includes factory installed DIM10 Synapse control module and MS/DC motion sensor; requires additional Synapse system components for operation. Contact Synapse at www.synapsewireless.com for product support, warranty and terms and conditions.

Project		Catalog #		Type	
Prepared by		Notes		Date	



McGraw-Edison

GLEON Galleon

Area / Site Luminaire

Product Features



Product Certifications




Interactive Menu

- Ordering Information page 2
- Mounting Details page 3
- Optical Distributions page 4
- Product Specifications page 4
- Energy and Performance Data page 4
- Control Options page 9

Quick Facts

- Lumen packages range from 4,200 - 80,800 (34W - 640W)
- Efficacy up to 156 lumens per watt
- Options to meet Buy American and other domestic preference requirements

Dimensional Details

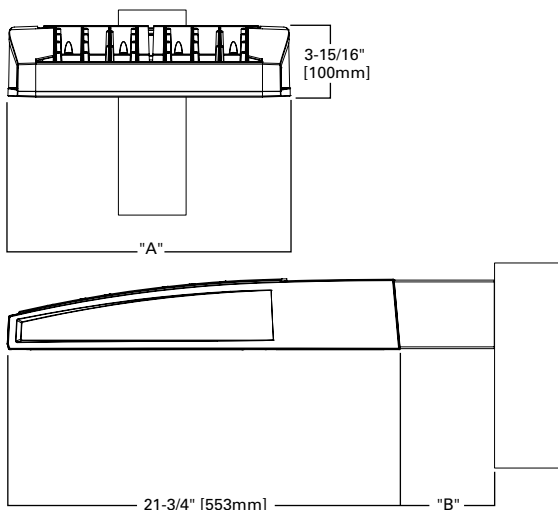

NOTES:

1. Visit <https://www.designlights.org/search/> to confirm qualification. Not all product variations are DLC qualified.
2. IDA Certified for 3000K CCT and warmer only.

Connected Systems

- WaveLinx
- Enlighted

Number of Light Squares	"A" Width	"B" Standard Arm Length	"B" Extended Arm Length ¹	"B" Quick Mount Arm Length	"B" Quick Mount Extended Arm Length
1-4	15-1/2"	7"	10"	10-5/8"	16-9/16"
5-6	21-5/8"	7"	10"	10-5/8"	16-9/16"
7-8	27-5/8"	7"	13"	10-5/8"	—
9-10	33-3/4"	7"	16"	—	—

NOTES:
For arm selection requirements and additional line art, see Mounting Details section.

Ordering Information

SAMPLE NUMBER: GLEON-SA4C-740-U-T4FT-GM

Product Family ^{1,2}	Light Engine		Color Temperature	Voltage	Distribution	Mounting	Finish
	Configuration	Drive Current					
GLEON =Galleon BAA-GLEON =Galleon, Buy American Act Compliant ³⁵ TAA-GLEON =Galleon, Trade Agreements Act Compliant ²⁸	SA1 =1 Square SA2 =2 Squares SA3 =3 Squares SA4 =4 Squares SA5 =5 Squares ⁴ SA6 =6 Squares SA7 =7 Squares ⁵ SA8 =8 Squares ⁵ SA9 =9 Squares ⁶ SA0 =10 Squares ⁶	A =600mA B =800mA C =1000mA D =1200mA ¹⁶	722 =70CRI, 2200K 727 =70CRI, 2700K 730 =70CRI, 3000K 735 =70CRI, 3500K 740 =70CRI, 4000K 750 =70CRI, 5000K 760 =70CRI, 6000K 827 =80CRI, 2700K 830 =80CRI, 3000K AMB =Amber, 590nm ^{14, 16}	U =120-277V 1 =120V 2 =208V 3 =240V 4 =277V 8 =480V ^{7, 8} 9 =347V ⁷	T2 =Type II T2R =Type II Roadway T3 =Type III T3R =Type III Roadway T4FT =Type IV Forward Throw T4W =Type IV Wide 5NQ =Type V Narrow 5MQ =Type V Square Medium 5WQ =Type V Square Wide SL2 =Type II w/Spill Control SL3 =Type III w/Spill Control SL4 =Type IV w/Spill Control SLL =90° Spill Light Eliminator Left SLR =90° Spill Light Eliminator Right RW =Rectangular Wide Type I AFL =Automotive Frontline	[Blank] =Arm for Round or Square Pole EA =Extended Arm ⁴ MA =Mast Arm Adapter ¹⁰ WM =Wall Mount QM =Quick Mount Arm (Standard Length) ¹¹ QMEA =Quick Mount Arm (Extended Length) ¹²	AP =Grey BZ =Bronze BK =Black DP =Dark Platinum GM =Graphite Metallic WH =White RALXX =Custom Color
Options (Add as Suffix)			Controls and Systems Options (Add as Suffix)		Accessories (Order Separately) ³⁶		
DIM =External 0-10V Dimming Leads ^{19, 20} F =Single Fuse (120, 277 or 347V Specify Voltage) FF =Double Fuse (208, 240 or 480V Specify Voltage) 20K =Series 20KV UL 1449 Surge Protective Device 2L =Two Circuits ^{17, 18} HA =50°C High Ambient HSS =Installed House Side Shield ²⁸ GRSBK =Glare Reducing Shield, Black ²³ GRSWH =Glare Reducing Shield, White ²³ LCF =Light Square Trim Painted to Match Housing ²⁷ MT =Installed Mesh Top TH =Tool-less Door Hardware CC =Coastal Construction finish ³ L90 =Optics Rotated 90° Left R90 =Optics Rotated 90° Right CE =CE Marking ²⁹ AHD145 =After Hours Dim, 5 Hours ²² AHD245 =After Hours Dim, 6 Hours ²² AHD255 =After Hours Dim, 7 Hours ²² AHD355 =After Hours Dim, 8 Hours ²² DALI =DALI Drivers			BPC =Button Type Photocontrol PR =NEMA 3-PIN Photocontrol Receptacle PR7 =NEMA 7-PIN Photocontrol Receptacle ²¹ SPB2 =Dimming Occupancy Sensor with Bluetooth Interface, 8' - 20' Mounting ³⁴ SPB4 =Dimming Occupancy Sensor with Bluetooth Interface, 21' - 40' Mounting ³⁴ MS-L20 =Motion Sensor for ON/OFF Operation, 9' - 20' Mounting Height ²⁴ MS-L40W =Motion Sensor for ON/OFF Operation, 21' - 40' Mounting Height ²⁴ MS/X-L20 =Bi-Level Motion Sensor, 9' - 20' Mounting Height ^{24, 25} MS/Y-L40W =Bi-Level Motion Sensor, 21' - 40' Mounting Height ^{24, 25} MS/DIM-L20 =Motion Sensor for Dimming Operation, 9' - 20' Mounting Height ²⁴ MS/DIM-L40W =Motion Sensor for Dimming Operation, 21' - 40' Mounting Height ²⁴ ZW =WaveLinX-enabled 4-PIN Twistlock Receptacle ZD =SR Driver-enabled 4-PIN Twistlock Receptacle ZW-WOBXX =WaveLinX Lite, Dimming Motion and Daylight, Bluetooth Programmable, 7' - 15' Mounting ^{13,32,33} ZW-WOFXX =WaveLinX Lite, Dimming Motion and Daylight, Bluetooth Programmable, 15' - 40' Mounting ^{13,32,33} ZD-WOBXX =WaveLinX Lite, SR Driver, Dimming Motion and Daylight, Bluetooth Programmable, 7' - 15' Mounting ^{13,32} ZD-WOFXX =WaveLinX Lite, SR Driver, Dimming Motion and Daylight, Bluetooth Programmable, 15' - 40' Mounting ^{13,32} ZW-SWPD4XX =WaveLinX Pro, Dimming Motion and Daylight, WAC Programmable, 7' - 15' Mounting ^{13,32,33} ZW-SWPD5XX =WaveLinX Pro, Dimming Motion and Daylight, WAC Programmable, 15' - 40' Mounting ^{13,32,33} ZD-SWPD4XX =WaveLinX Pro, SR Driver, Dimming Motion and Daylight, WAC Programmable, 7' - 15' Mounting ^{13,32,33} ZD-SWPD5XX =WaveLinX Pro, SR Driver, Dimming Motion and Daylight, WAC Programmable, 15' - 40' Mounting ^{13,32,33} LWR-LW =Enlightened Sensor, 8' - 16' Mounting Height ²⁶ LWR-LN =Enlightened Sensor, 16' - 40' Mounting Height ²⁶ DIM10-MS/DIM-L08 =Synapse Occupancy Sensor (<8' Mounting) ¹⁹ DIM10-MS/DIM-L20 =Synapse Occupancy Sensor (9'-20' Mounting) ¹⁹ DIM10-MS/DIM-L40 =Synapse Occupancy Sensor (21'-40' Mounting) ¹⁹		0A/RA1016 =NEMA Photocontrol Multi-Tap - 105-285V 0A/RA1027 =NEMA Photocontrol - 480V 0A/RA1201 =NEMA Photocontrol - 347V 0A/RA1013 =Photocontrol Shorting Cap 0A/RA1014 =120V Photocontrol MA1252 =10kV Surge Module Replacement MA1036-XX =Single Tenon Adapter for 2-3/8" O.D. Tenon MA1037-XX =2@180° Tenon Adapter for 2-3/8" O.D. Tenon MA1197-XX =3@120° Tenon Adapter for 2-3/8" O.D. Tenon MA1188-XX =4@90° Tenon Adapter for 2-3/8" O.D. Tenon MA1189-XX =2@90° Tenon Adapter for 2-3/8" O.D. Tenon MA1190-XX =3@90° Tenon Adapter for 2-3/8" O.D. Tenon MA1191-XX =2@120° Tenon Adapter for 2-3/8" O.D. Tenon MA1038-XX =Single Tenon Adapter for 3-1/2" O.D. Tenon MA1039-XX =2@180° Tenon Adapter for 3-1/2" O.D. Tenon MA1192-XX =3@120° Tenon Adapter for 3-1/2" O.D. Tenon MA1193-XX =4@90° Tenon Adapter for 3-1/2" O.D. Tenon MA1194-XX =2@90° Tenon Adapter for 3-1/2" O.D. Tenon MA1195-XX =3@90° Tenon Adapter for 3-1/2" O.D. Tenon FSIR-100 =Wireless Configuration Tool for Occupancy Sensor ²⁴ GLEON-MT1 =Field Installed Mesh Top for 1-4 Light Squares GLEON-MT2 =Field Installed Mesh Top for 5-6 Light Squares GLEON-MT3 =Field Installed Mesh Top for 7-8 Light Squares GLEON-MT4 =Field Installed Mesh Top for 9-10 Light Squares GLEON-QM =Quick Mount Arm Kit ¹¹ GLEON-QMEA =Quick Mount Extended Arm Kit ¹² LS/HSS =Field Installed House Side Shield ^{28, 30} LS/GRSBK-2PK =Glare Reducing Shield, Black ^{23, 30} LS/GRSWH-2PK =Glare Reducing Shield, White ^{23, 30} LS/PFS =Perimeter Shield, Black ¹⁵ WOLC-7P-10A =WaveLinX Outdoor Control Module ^{19, 31} WOB-XX = WaveLinX Lite Sensor, Dimming Motion and Daylight, Bluetooth Programmable, 7' - 15' Mounting ^{13,32} WOF-XX = WaveLinX Lite Sensor, Dimming Motion and Daylight, Bluetooth Programmable, 15' - 40' Mounting ^{13,32} SWPD4-XX = WaveLinX Sensor, Dimming Motion and Daylight, WAC Programmable, 7' - 15' Mounting ^{13,19,32,33} SWPD5-XX = WaveLinX Sensor, Dimming Motion and Daylight, WAC Programmable, 15' - 40' Mounting ^{13,19,32,33}		
NOTES: 1. Customer is responsible for engineering analysis to confirm pole and fixture compatibility for all applications. Refer to our white paper WP513001EN for additional support information. 2. DesignLights Consortium® Qualified. Refer to www.designlights.org Qualified Products List under Family Models for details. 3. Coastal construction finish salt spray tested to over 5,000-hours per ASTM B117, with a scribe rating of 9 per ASTM D1654. Not available with TH option. 4. Not compatible with MS/4-LXX or MS/1-LXX sensors. 5. Not compatible with extended quick mount arm (QMEA). 6. Not compatible with standard quick mount arm (QM) or extended quick mount arm (QMEA). 7. Requires the use of an internal step down transformer when combined with sensor options. Not available with sensor at 1200mA. Not available in combination with the HA high ambient and sensor options at 1A. 8. 480V must utilize Wye system only. Per NEC, not for use with ungrounded systems, impedance grounded systems or corner grounded systems (commonly known as Three Phase Three Wire Delta, Three Phase High Leg Delta and Three Phase Corner Grounded Delta systems.) 9. May be required when two or more luminaires are oriented on a 90° or 120° drilling pattern. Refer to arm mounting requirement table. 10. Factory installed. 11. Maximum 8 light squares. 12. Maximum 6 light squares. 13. Requires ZW or ZD receptacle. 14. Narrow-band 590nm +/- 5nm for wildlife and observatory use. Choose drive current A; supplied at 500mA drive current only. Available with 5WQ, 5MQ, SL2, SL3 and SL4 distributions. Can be used with HSS option. 15. Set of 4 pcs. One set required per Light Square. 16. Not available with HA option. 17. 2L is not available with MS, MS/X or MS/DIM at 347V or 480V. 2L in SA2 through SA4 requires a larger housing, normally used for SA5 or SA6. Extended arm option may be required when mounting two or more fixtures per pole at 90° or 120°. Refer to arm mounting requirement table. 18. Not available with Enlightened wireless sensors. 19. Cannot be used with other control options. 20. Low voltage control lead brought out 18" outside fixture. 21. Not available if any "MS" sensor is selected. Motion sensor has an integral photocell. 22. Requires the use of BPC photocontrol or the PR7 or PR photocontrol receptacle with photocontrol accessory. See After Hours Dim supplemental guide for additional information. 23. Not for use with T4FT, T4W or SL4 optics. See IES files for details. 24. The FSIR-100 configuration tool is required to adjust parameters including high and low modes, sensitivity, time delay, cutoff and more. Consult your lighting representative at Cooper Lighting Solutions for more information. 25. Replace X with number of Light Squares operating in low output mode. 26. Enlightened wireless sensors are factory installed only requiring network components LWP-EM-1, LWP-GW-1 and LWP-PoE8 in appropriate quantities. 27. Not available with house side shield (HSS). 28. Not for use with 5NQ, 5MQ, 5WQ or RW optics. A black trim plate is used when HSS is selected. 29. CE is not available with the LWR, MS, MS/X, MS/DIM, BPC, PR or PR7 options. Available in 120-277V only. 30. One required for each Light Square. 31. Requires PR7. 32. Replace XX with sensor color (WH, BZ or BK.) 33. WAC Gateway required to enable field-configurability: Order WAC-PoE and WPOE-120 (10V to PoE injector) power supply if needed. 34. Smart device with mobile application required to change system defaults. See controls section for details. 35. Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to DOMESTIC.PREFERENCES website for more information. Components shipped separately may be separately analyzed under domestic preference requirements. 36. For BAA or TAA requirements, Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.							


LumenSafe Integrated Network Security Camera Technology Options (Add as Suffix)

Product Family	Camera Type	Data Backhaul
L =LumenSafe Technology 	D =Standard Dome Camera H =Hi-Res Dome Camera Z =Remote PTZ Camera	C =Cellular, No SIM A =Cellular, AT&T V =Cellular, Verizon S =Cellular, Sprint R =Cellular, Rogers W =Wi-Fi Networking w/ Omni-Directional Antenna E =Ethernet Networking


Mounting Details

Standard Arm (Drilling Pattern)


TYPE "N"




Quick Mount Arm (Includes fixture adapter)




QM and QMEA Pole Mount

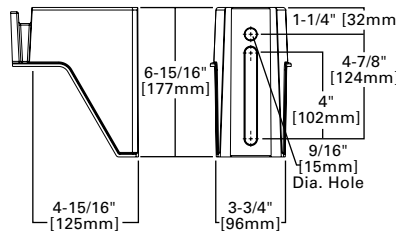


QML Pole Mount

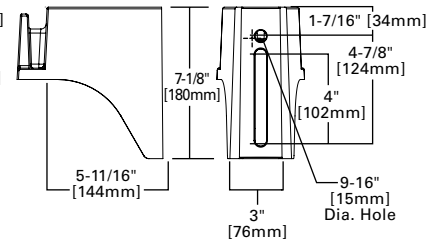


QM Quick Mount Arm (Standard)

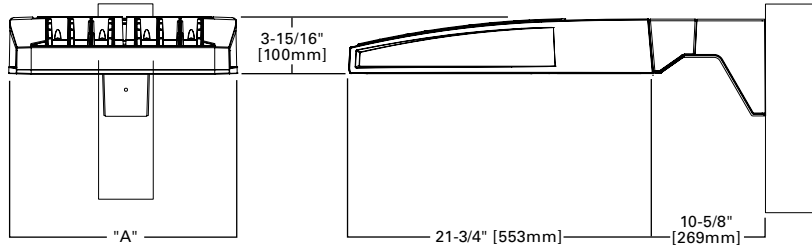


QMEA Quick Mount Arm (Extended)

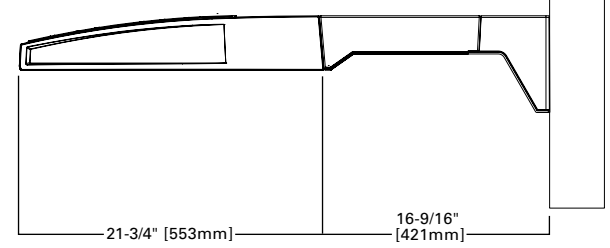

Standard Wall Mount




Mast Arm Mount

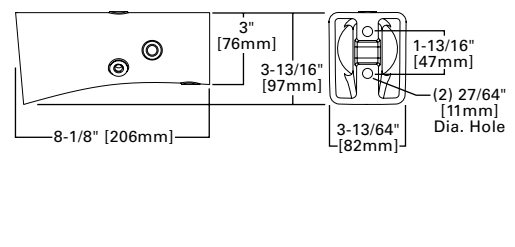

Arm Mounting Requirements

Number of Light Squares	Standard Arm @ 90° Apart	Standard Arm @ 120° Apart	Quick Mount Arm @ 90° Apart	Quick Mount Arm @ 120° Apart
1	Standard	Standard	QM Extended	Quick Mount
2	Standard	Standard	QM Extended	Quick Mount
3	Standard	Standard	QM Extended	Quick Mount
4	Standard	Standard	QM Extended	Quick Mount
5	Extended	Standard	QM Extended	Quick Mount
6	Extended	Standard	QM Extended	Quick Mount
7	Extended	Extended	--	Quick Mount
8	Extended	Extended	--	Quick Mount
9	Extended	Extended	--	--
10	Extended	Extended	--	--

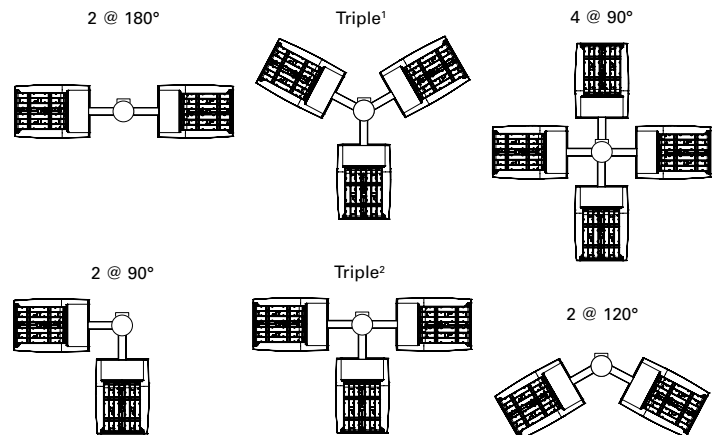


NOTES: 1 Round poles are 3 @ 120°. Square poles are 3 @ 90°. 2 Round poles are 3 @ 90°. 3 Shown with 4 square configurations

Fixture Weights and EPAs

Number of Light Squares	Weight with Standard and Extended Arm (lbs.)	EPA with Standard and Extended Arm (Sq. Ft.)	Weight with QM Arm (lbs.)	EPA with QM Arm (Sq. Ft.)	Weight with QML (lbs.)	EPA with QML (Sq. Ft.)	Weight with QMEA (lbs.)	EPA with QMEA (Sq. Ft.)
1-4	33	0.96	35	1.11	--	--	38	1.11
5-6	44	1.00	46	1.11	--	--	49	1.11
7-8	54	1.07	56	1.11	58	1.11	--	--
9-10	63	1.12	--	--	67	1.11	--	--

Optical Distributions

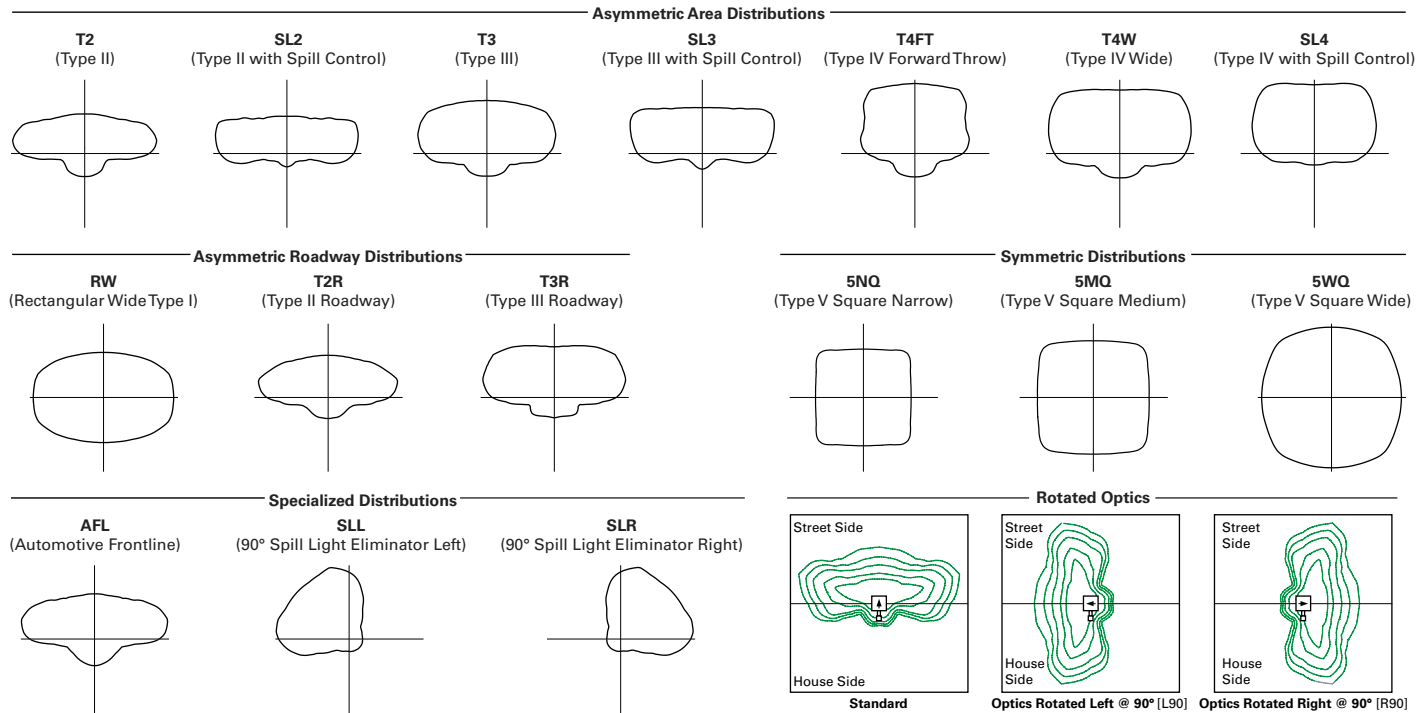

Product Specifications

Construction

- Extruded aluminum driver enclosure
- Heavy-wall, die-cast aluminum end caps
- Die-cast aluminum heat sinks
- Patent pending interlocking housing and heat sink

Optics

- Patented, high-efficiency injection-molded AccuLED Optics technology
- 16 optical distributions
- 3 shielding options including HSS, GRS and PFS
- IDA Certified (3000K CCT and warmer only)

Electrical

- LED drivers are mounted to removable tray

assembly for ease of maintenance

- Standard with 0-10V dimming
- Standard with Cooper Lighting Solutions proprietary circuit module designed to withstand 10kV of transient line surge
- Suitable for operation in -40°C to 40°C ambient environments. Optional 50°C high ambient (HA) configuration.

Mounting

- Standard extruded arm includes internal bolt guides and round pole adapter
- Extended arms (EA and QMEA) may be required in 90° or 120° pole mount configurations, see arm mounting requirements table

- Mast arm (MA) factory installed

- Wall mount (WM) option available

- Quick mount arm (QM and QMEA) includes pole adapter and factory installed fixture mount for fast installation to square or round poles

Finish

- Super housing durable TGIC polyester powder coat paint, 2.5 mil nominal thickness
- Heat sink is powder coated black
- RAL and custom color matches available
- Coastal Construction (CC) option available

Warranty

- Five year warranty

Energy and Performance Data

Lumen Maintenance (TM-21)

Drive Current	Ambient Temperature	25,000 hours*	50,000 hours*	60,000 hours*	100,000 hours**	Theoretical L70 hours**
Up to 1A	25°C	99.4%	99.0%	98.9%	98.3%	> 2.4M
	40°C	98.7%	98.3%	98.1%	97.4%	> 1.9M
	50°C	98.2%	97.2%	96.8%	95.2%	> 851,000
1.2A	25°C	99.4%	99.0%	98.9%	98.3%	> 2.4M
	40°C	98.5%	97.9%	97.7%	96.7%	> 1.3M

* Supported by IES TM-21 standards

** Theoretical values represent estimations commonly used; however, refer to the IES position on LED Product Lifetime Prediction, IES PS-10-18, explaining proper use of IES TM-21 and LM-80.

Lumen Multiplier

Ambient Temperature	Lumen Multiplier
0°C	1.02
10°C	1.01
25°C	1.00
40°C	0.99
50°C	0.97



View GLEON IES files

Nominal Power Lumens (1.2A)

 Supplemental Performance Guide**

Number of Light Squares		1	2	3	4	5	6	7	8	9	10
Nominal Power (Watts)		67	129	191	258	320	382	448	511	575	640
Input Current @ 120V (A)		0.58	1.16	1.78	2.31	2.94	3.56	4.09	4.71	5.34	5.87
Input Current @ 208V (A)		0.33	0.63	0.93	1.27	1.57	1.87	2.22	2.52	2.8	3.14
Input Current @ 240V (A)		0.29	0.55	0.80	1.10	1.35	1.61	1.93	2.18	2.41	2.71
Input Current @ 277V (A)		0.25	0.48	0.70	0.96	1.18	1.39	1.69	1.90	2.09	2.36
Input Current @ 347V (A)		0.20	0.39	0.57	0.78	0.96	1.15	1.36	1.54	1.72	1.92
Input Current @ 480V (A)		0.15	0.30	0.43	0.60	0.73	0.85	1.03	1.16	1.28	1.45
Optics											
T2	4000K Lumens	7,972	15,580	23,245	30,714	38,056	45,541	53,857	61,024	68,072	75,366
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	119	121	122	119	119	119	120	119	118	118
T2R	4000K Lumens	8,462	16,539	24,680	32,609	40,401	48,348	57,176	64,783	72,266	80,010
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	126	128	129	126	126	127	128	127	126	125
T3	4000K Lumens	8,125	15,879	23,693	31,307	38,787	46,417	54,893	62,197	69,381	76,818
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	121	123	124	121	121	122	123	122	121	120
T3R	4000K Lumens	8,306	16,232	24,220	32,001	39,651	47,447	56,114	63,580	70,924	78,523
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	124	126	127	124	124	124	125	124	123	123
T4FT	4000K Lumens	8,173	15,970	23,831	31,488	39,014	46,686	55,212	62,558	69,783	77,261
	BUG Rating	B1-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	122	124	125	122	122	122	123	122	121	121
T4W	4000K Lumens	8,067	15,764	23,522	31,080	38,510	46,082	54,499	61,751	68,881	76,263
	BUG Rating	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5
	Lumens per Watt	120	122	123	120	120	121	122	121	120	119
SL2	4000K Lumens	7,958	15,552	23,206	30,662	37,989	45,462	53,763	60,920	67,952	75,235
	BUG Rating	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	119	121	121	119	119	119	120	119	118	118
SL3	4000K Lumens	8,124	15,877	23,690	31,302	38,784	46,410	54,885	62,189	69,372	76,805
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	121	123	124	121	121	121	123	122	121	120
SL4	4000K Lumens	7,719	15,085	22,510	29,741	36,850	44,097	52,148	59,089	65,913	72,977
	BUG Rating	B1-U0-G3	B2-U0-G4	B2-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	115	117	118	115	115	115	116	116	115	114
5NQ	4000K Lumens	8,380	16,375	24,436	32,287	40,003	47,870	56,610	64,144	71,552	79,221
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	125	127	128	125	125	125	126	126	124	124
5MQ	4000K Lumens	8,534	16,676	24,885	32,881	40,739	48,752	57,653	65,326	72,868	80,679
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	127	129	130	127	127	128	129	128	127	126
5WQ	4000K Lumens	8,556	16,723	24,951	32,968	40,847	48,881	57,808	65,499	73,063	80,894
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	128	130	131	128	128	128	129	128	127	126
SLL/ SLR	4000K Lumens	7,140	13,951	20,817	27,506	34,081	40,783	48,231	54,649	60,959	67,492
	BUG Rating	B1-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	107	108	109	107	107	107	108	107	106	105
RW	4000K Lumens	8,304	16,228	24,215	31,994	39,641	47,437	56,100	63,566	70,907	78,504
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5
	Lumens per Watt	124	126	127	124	124	124	125	124	123	123
AFL	4000K Lumens	8,335	16,287	24,302	32,110	39,784	47,610	56,303	63,796	71,163	78,790
	BUG Rating	B1-U0-G1	B2-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G4	B4-U0-G4	B4-U0-G4	B4-U0-G5
	Lumens per Watt	124	126	127	124	124	125	126	125	124	123

* Nominal data for 70 CRI. ** For additional performance data, please reference the Galleon Supplemental Performance Guide.

Nominal Power Lumens (1A)

 Supplemental Performance Guide**

Number of Light Squares		1	2	3	4	5	6	7	8	9	10
Nominal Power (Watts)		59	113	166	225	279	333	391	445	501	558
Input Current @ 120V (A)		0.51	1.02	1.53	2.03	2.55	3.06	3.56	4.08	4.60	5.07
Input Current @ 208V (A)		0.29	0.56	0.82	1.11	1.37	1.64	1.93	2.19	2.46	2.75
Input Current @ 240V (A)		0.26	0.48	0.71	0.96	1.19	0.41	1.67	1.89	2.12	2.39
Input Current @ 277V (A)		0.23	0.42	0.61	0.83	1.03	1.23	1.45	1.65	1.84	2.09
Input Current @ 347V (A)		0.17	0.32	0.50	0.64	0.82	1.00	1.14	1.32	1.50	1.68
Input Current @ 480V (A)		0.14	0.24	0.37	0.48	0.61	0.75	0.91	0.99	1.12	1.28
Optics											
T2	4000K Lumens	7,267	14,201	21,190	28,000	34,692	41,515	49,096	55,627	62,053	68,703
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	123	126	128	124	124	125	126	125	124	123
T2R	4000K Lumens	7,715	15,077	22,497	29,725	36,829	44,073	52,122	59,056	65,876	72,937
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	131	133	136	132	132	132	133	133	131	131
T3	4000K Lumens	7,408	14,475	21,598	28,539	35,358	42,313	50,039	56,698	63,246	70,024
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	126	128	130	127	127	127	128	127	126	125
T3R	4000K Lumens	7,571	14,798	22,078	29,172	36,145	43,253	51,153	57,959	64,653	71,581
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	128	131	133	130	130	130	131	130	129	128
T4FT	4000K Lumens	7,451	14,559	21,725	28,703	35,564	42,558	50,330	57,027	63,613	70,430
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	126	129	131	128	127	128	129	128	127	126
T4W	4000K Lumens	7,354	14,371	21,442	28,333	35,105	42,007	49,681	56,291	62,792	69,521
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	125	127	129	126	126	126	127	126	125	125
SL2	4000K Lumens	7,254	14,178	21,155	27,951	34,631	41,443	49,011	55,533	61,944	68,584
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	123	125	127	124	124	124	125	125	124	123
SL3	4000K Lumens	7,406	14,474	21,596	28,534	35,355	42,307	50,033	56,690	63,237	70,014
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	126	128	130	127	127	127	128	127	126	125
SL4	4000K Lumens	7,037	13,751	20,519	27,112	33,592	40,198	47,538	53,864	60,087	66,524
	BUG Rating	B1-U0-G3	B2-U0-G4	B2-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	119	122	124	120	120	121	122	121	120	119
5NQ	4000K Lumens	7,640	14,928	22,275	29,431	36,465	43,637	51,606	58,472	65,226	72,218
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	129	132	134	131	131	131	132	131	130	129
5MQ	4000K Lumens	7,779	15,203	22,684	29,973	37,137	44,441	52,555	59,549	66,427	73,545
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	132	135	137	133	133	133	134	134	133	132
5WQ	4000K Lumens	7,800	15,243	22,744	30,052	37,236	44,560	52,697	59,708	66,603	73,742
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	132	135	137	134	133	134	135	134	133	132
SLL/ SLR	4000K Lumens	6,510	12,719	18,977	25,075	31,067	37,176	43,967	49,817	55,569	61,525
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	110	113	114	111	111	112	112	112	111	110
RW	4000K Lumens	7,570	14,793	22,073	29,165	36,137	43,243	51,140	57,945	64,637	71,564
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5
	Lumens per Watt	128	131	133	130	130	130	131	130	129	128
AFL	4000K Lumens	7,598	14,847	22,154	29,272	36,267	43,400	51,326	58,156	64,872	71,824
	BUG Rating	B1-U0-G1	B2-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G4	B4-U0-G4	B4-U0-G4	B4-U0-G4
	Lumens per Watt	129	131	133	130	130	130	131	131	129	129

* Nominal data for 70 CRI. ** For additional performance data, please reference the Galleon Supplemental Performance Guide.

Nominal Power Lumens (800mA)

 Supplemental Performance Guide**

Number of Light Squares		1	2	3	4	5	6	7	8	9	10
Nominal Power (Watts)		44	85	124	171	210	249	295	334	374	419
Input Current @ 120V (A)		0.39	0.77	1.13	1.54	1.90	2.26	2.67	3.03	3.39	3.80
Input Current @ 208V (A)		0.22	0.44	0.62	0.88	1.06	1.24	1.50	1.68	1.87	2.12
Input Current @ 240V (A)		0.19	0.38	0.54	0.76	0.92	1.08	1.30	1.46	1.62	1.84
Input Current @ 277V (A)		0.17	0.36	0.47	0.72	0.83	0.95	1.19	1.31	1.42	1.67
Input Current @ 347V (A)		0.15	0.24	0.38	0.49	0.63	0.77	0.87	1.01	1.15	1.52
Input Current @ 480V (A)		0.11	0.18	0.29	0.37	0.48	0.59	0.66	0.77	0.88	0.96
Optics											
T2	4000K Lumens	5,871	11,474	17,121	22,622	28,029	33,542	39,667	44,944	50,134	55,508
	BUG Rating	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	133	135	138	132	133	135	134	135	134	132
T2R	4000K Lumens	6,233	12,181	18,176	24,016	29,756	35,608	42,111	47,714	53,224	58,929
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5
	Lumens per Watt	142	143	147	140	142	143	143	143	142	141
T3	4000K Lumens	5,986	11,695	17,450	23,057	28,568	34,186	40,430	45,809	51,099	56,576
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	136	138	141	135	136	137	137	137	137	135
T3R	4000K Lumens	6,117	11,955	17,838	23,569	29,203	34,946	41,328	46,827	52,235	57,832
	BUG Rating	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	139	141	144	138	139	140	140	140	140	138
T4FT	4000K Lumens	6,019	11,763	17,551	23,190	28,734	34,384	40,663	46,074	51,396	56,904
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	137	138	142	136	137	138	138	138	137	136
T4W	4000K Lumens	5,942	11,610	17,324	22,891	28,363	33,940	40,138	45,480	50,732	56,169
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	135	137	140	134	135	136	136	136	136	134
SL2	4000K Lumens	5,862	11,454	17,091	22,583	27,980	33,484	39,598	44,867	50,048	55,411
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	133	135	138	132	133	134	134	134	134	132
SL3	4000K Lumens	5,985	11,694	17,447	23,053	28,565	34,182	40,424	45,804	51,092	56,568
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	136	138	141	135	136	137	137	137	137	135
SL4	4000K Lumens	5,685	11,111	16,577	21,905	27,140	32,478	38,409	43,520	48,546	53,748
	BUG Rating	B1-U0-G2	B1-U0-G3	B2-U0-G4	B2-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	129	131	134	128	129	130	130	130	130	128
5NQ	4000K Lumens	6,172	12,061	17,997	23,778	29,462	35,256	41,694	47,242	52,699	58,347
	BUG Rating	B2-U0-G1	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4
	Lumens per Watt	140	142	145	139	140	142	141	141	141	139
5MQ	4000K Lumens	6,285	12,283	18,328	24,217	30,004	35,907	42,462	48,112	53,669	59,421
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5
	Lumens per Watt	143	145	148	142	143	144	144	144	144	142
5WQ	4000K Lumens	6,303	12,317	18,377	24,281	30,085	36,001	42,575	48,241	53,812	59,579
	BUG Rating	B3-U0-G1	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	143	145	148	142	143	145	144	144	144	142
SL/SLR	4000K Lumens	5,260	10,276	15,332	20,259	25,101	30,037	35,522	40,249	44,898	49,708
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	120	121	124	118	120	121	120	121	120	119
RW	4000K Lumens	6,116	11,952	17,834	23,563	29,196	34,938	41,317	46,817	52,224	57,819
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	139	141	144	138	139	140	140	140	140	138
AFL	4000K Lumens	6,139	11,996	17,899	23,650	29,302	35,064	41,468	46,987	52,412	58,030
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G4	B4-U0-G4
	Lumens per Watt	140	141	144	138	140	141	141	141	140	138

* Nominal data for 70 CRI. ** For additional performance data, please reference the Galleon Supplemental Performance Guide.

Nominal Power Lumens (600mA)

 Supplemental Performance Guide**

Number of Light Squares		1	2	3	4	5	6	7	8	9	10
Nominal Power (Watts)		34	66	96	129	162	193	226	257	290	323
Input Current @ 120V (A)		0.30	0.58	0.86	1.16	1.44	1.73	2.03	2.33	2.59	2.89
Input Current @ 208V (A)		0.17	0.34	0.49	0.65	0.84	0.99	1.14	1.30	1.48	1.63
Input Current @ 240V (A)		0.15	0.30	0.43	0.56	0.74	0.87	1.00	1.13	1.30	1.43
Input Current @ 277V (A)		0.14	0.28	0.41	0.52	0.69	0.81	0.93	1.04	1.22	1.33
Input Current @ 347V (A)		0.11	0.19	0.30	0.39	0.49	0.60	0.69	0.77	0.90	0.99
Input Current @ 480V (A)		0.08	0.15	0.24	0.30	0.38	0.48	0.53	0.59	0.71	0.77
Optics											
T2	4000K Lumens	4,787	9,357	13,961	18,448	22,856	27,353	32,347	36,651	40,884	45,265
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	141	142	145	143	141	142	143	143	141	140
T2R	4000K Lumens	5,083	9,934	14,822	19,585	24,266	29,038	34,341	38,911	43,404	48,055
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5
	Lumens per Watt	150	151	154	152	150	150	152	151	150	149
T3	4000K Lumens	4,880	9,537	14,231	18,803	23,296	27,878	32,970	37,358	41,671	46,137
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	144	145	148	146	144	144	146	145	144	143
T3R	4000K Lumens	4,988	9,749	14,547	19,220	23,814	28,497	33,703	38,188	42,598	47,162
	BUG Rating	B1-U0-G2	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	147	148	152	149	147	148	149	149	147	146
T4FT	4000K Lumens	4,909	9,591	14,312	18,911	23,432	28,040	33,161	37,574	41,913	46,404
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	144	145	149	147	145	145	147	146	145	144
T4W	4000K Lumens	4,845	9,468	14,128	18,668	23,130	27,678	32,732	37,088	41,371	45,805
	BUG Rating	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	143	143	147	145	143	143	145	144	143	142
SL2	4000K Lumens	4,779	9,341	13,937	18,416	22,818	27,305	32,292	36,589	40,813	45,188
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	141	142	145	143	141	141	143	142	141	140
SL3	4000K Lumens	4,879	9,536	14,229	18,800	23,294	27,874	32,965	37,351	41,666	46,130
	BUG Rating	B1-U0-G2	B1-U0-G3	B2-U0-G3	B2-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	144	144	148	146	144	144	146	145	144	143
SL4	4000K Lumens	4,637	9,059	13,519	17,863	22,132	26,486	31,322	35,490	39,589	43,831
	BUG Rating	B1-U0-G2	B1-U0-G3	B2-U0-G4	B2-U0-G4	B2-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	136	137	141	138	137	137	139	138	137	136
5NQ	4000K Lumens	5,033	9,835	14,676	19,392	24,026	28,751	34,002	38,526	42,975	47,581
	BUG Rating	B2-U0-G1	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3
	Lumens per Watt	148	149	153	150	148	149	150	150	148	147
5MQ	4000K Lumens	5,126	10,015	14,946	19,747	24,468	29,281	34,628	39,236	43,766	48,457
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	151	152	156	153	151	152	153	153	151	150
5WQ	4000K Lumens	5,139	10,043	14,985	19,801	24,533	29,359	34,721	39,339	43,883	48,586
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5
	Lumens per Watt	151	152	156	153	151	152	154	153	151	150
SL/SLR	4000K Lumens	4,289	8,380	12,502	16,520	20,469	24,494	28,967	32,823	36,613	40,537
	BUG Rating	B1-U0-G2	B1-U0-G3	B2-U0-G3	B2-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	126	127	130	128	126	127	128	128	126	126
RW	4000K Lumens	4,987	9,746	14,543	19,215	23,808	28,491	33,695	38,178	42,587	47,151
	BUG Rating	B2-U0-G1	B3-U0-G1	B4-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4
	Lumens per Watt	147	148	151	149	147	148	149	149	147	146
AFL	4000K Lumens	5,007	9,782	14,597	19,285	23,896	28,594	33,817	38,317	42,742	47,322
	BUG Rating	B1-U0-G1	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3
	Lumens per Watt	147	148	152	149	148	148	150	149	147	147

* Nominal data for 70 CRI. ** For additional performance data, please reference the Galleon Supplemental Performance Guide.

Control Options

0-10V (DIM)

This fixture is offered standard with 0-10V dimming driver(s). The DIM option provides 0-10V dimming wire leads for use with a lighting control panel or other control method.

Photocontrol (BPC, PR and PR7)



Optional button-type photocontrol (BPC) and photocontrol receptacles (PR and PR7) provide a flexible solution to enable “dusk-to-dawn” lighting by sensing light levels. Advanced control systems compatible with NEMA 7-pin standards can be utilized with the PR7 receptacle.

After Hours Dim (AHD)

This feature allows photocontrol-enabled luminaires to achieve additional energy savings by dimming during scheduled portions of the night. The dimming profile will automatically take effect after a “dusk-to-dawn” period has been calculated from the photocontrol input. Specify the desired dimming profile for a simple, factory-shipped dimming solution requiring no external control wiring. Reference the After Hours Dim supplemental guide for additional information.




Dimming Occupancy Sensor (SPB, MS/DIM-LXX, MS/X-LXX and MS-LXX)

These sensors are factory installed in the luminaire housing. When the SPB or MS/DIM sensor options are selected, the occupancy sensor is connected to a dimming driver and the entire luminaire dims when there is no activity detected. When activity is detected, the luminaire returns to full light output. The MS/DIM sensor is factory preset to dim down to approximately 50 percent power with a time delay of five minutes. The MS-LXX sensor is factory preset to turn the luminaire off after five minutes of no activity. The MS/X-LXX is also preset for five minutes and only controls the specified number of light engines to maintain steady output from the remaining light engines. SPB motion sensors require the Sensor Configuration mobile application by Wattstopper to change factory default dimming level, time delay, sensitivity and other parameters. Available for iOS and Android devices. The SPB sensor is factory preset to dim down to approximately 10% power with a time delay of five minutes. The MS/DIM occupancy sensors require the FSIR-100 programming tool to adjust factory defaults.

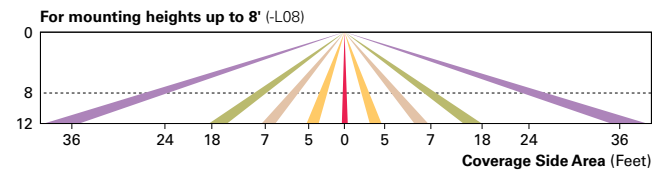

Enlighted Wireless Control and Monitoring System (LWR-LW and LWR-LN)

Enlighted is a connected lighting solution that combines a broad selection of energy-efficient LED luminaires with a powerful integrated wireless sensor system. The sensor controls the lighting system in compliance with the latest energy codes and collects valuable data about building performance and use. Software applications turn the granular data into information through energy dashboards and specialized apps that make it simple and help optimize the use of building resources, beyond lighting.

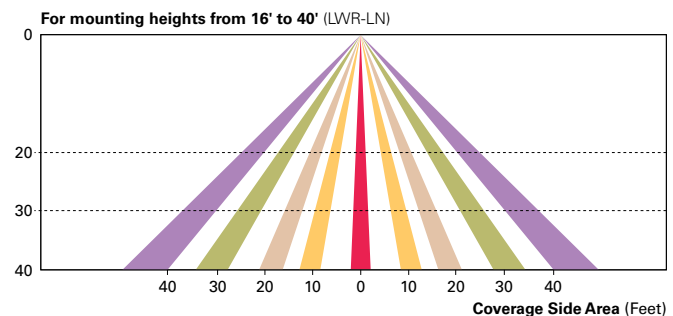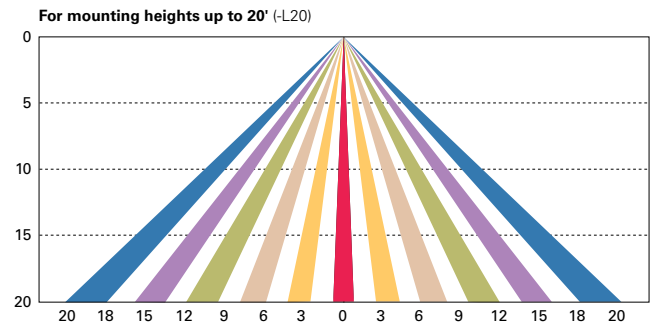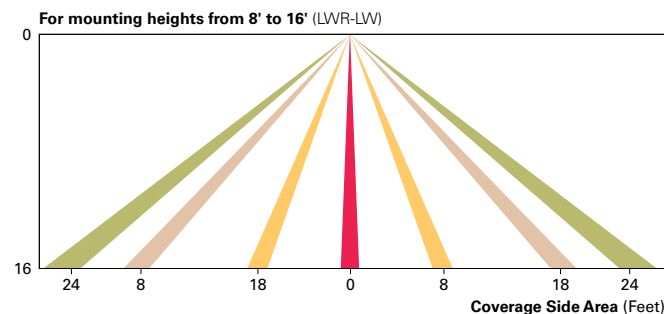

WaveLinX Wireless Outdoor Lighting Control Module (WOLC-7P-10A)

The 7-pin wireless outdoor lighting control module enables WaveLinX to control outdoor area, site and flood lighting. WaveLinX controls outdoor lighting using schedules to provide ON, OFF and dimming controls based on astronomic or time schedules based on a 7 day week.

LumenSafe Integrated Network Security Camera (LD)

Cooper Lighting Solutions brings ease of camera deployment to a whole new level. No additional wiring is needed beyond providing line power to the luminaire. A variety of networking options allows security integrators to design the optimal solution for active surveillance. As the ideal solution to meet the needs for active surveillance, the LumenSafe integrated network camera is a streamlined, outdoor-ready fixed dome that provides HDTV 1080p video. This IP camera is optimally designed for deployment in the video management system or security software platform of choice.

Synapse (DIM10)

SimplySNAP integrated wireless controls system by Synapse. Includes factory installed DIM10 Synapse control module and MS/DC motion sensor; requires additional Synapse system components for operation. Contact Synapse at www.synapsewireless.com for product support, warranty and terms and conditions.

DESCRIPTION

The Entri LED luminaire features a classic and stylish design with the added benefits of solid state lighting technology, offering outstanding uniformity and energy savings. Using Cooper Lighting Solutions' proprietary LED LightSquare technology and AccuLED Optics™ system, the Entri LED luminaire offers designers vast versatility in system design, function and performance. Use Entri LED for wall mount architectural lighting applications and egress lighting requirements. UL/cUL listed for use in wet locations.

SPECIFICATION FEATURES

Construction

HOUSING: Heavy wall, one-piece, die-cast aluminum construction for precise tolerance control and repeatability in manufacturing. Integral extruded aluminum heat sink provides superior thermal heat transfer in +40°C ambient environments. **FACEPLATE / DOOR:** One-piece, die-cast aluminum construction. Captive, side hinged faceplate swings open via release of one flush mount die-cast aluminum latch on housing side panel. **GASKET:** One-piece molded silicone gasket mates perfectly between the door and housing for repeatable seal. **LENS:** Uplight lens is impact-resistant, 5/32" thick tempered frosted glass sealed to housing with continuous bead silicone gasket. Downlight lens is an LED LightSquare with integral optics sealed for IP66 rating. **HARDWARE:** Stainless steel mounting screws and latch hardware allow access to electrical components for installation and servicing.

Optics

Choice of 9 patented, high efficiency AccuLED Optics™ distributions. Optics are precisely designed to shape the light output, maximizing efficiency and application spacing. AccuLED Optics technology creates consistent distributions with the

scalability to meet customized application requirements. CRI and CCT offering includes 2200K, 2700K, 3000K, 3500K, 4000K, 5000K, and 5700K with minimum 70CRI and 2700K and 3000K with minimum 80CRI all within 5-step MacAdam ellipse.

Electrical

LED drivers mount to die-cast aluminum back housing for optimal heat sinking, operation efficacy, and prolonged life. Standard drivers feature electronic universal voltage (120-277V 50/60Hz), 347V 60Hz or 480V 60Hz operation. 480V is compatible for use with 480V Wye systems only. Greater than 0.9 power factor, less than 20% harmonic distortion, and is suitable for operation in -40°C to 40°C ambient environments and optional 50C construction available. All fixtures are shipped standard with 10kV/10kA common – and differential – mode surge protection. LightSquare feature an IP66 enclosure rating and maintain greater than 98% lumen maintenance at 60,000 hours per IESNA TM-21. Emergency egress options for -20°C ambient environments, WaveLinX™, occupancy sensor, and dimming options available.

Mounting

JUNCTION BOX: Standard with

zinc-plated, quick-mount junction box plate that mounts directly to 4" J-Box. LightSquare mounts facing downward. Fixture slides over mounting plate and is secured with two stainless steel fasteners. Mounting plate features a one-piece EPDM gasket on back side of plate to firmly seal fixture to wall surface, forbidding entry of moisture and particulates. Optional mounting arrangements utilize a die-cast mounting adaptor box to allow for LED battery pack, surface conduit and trough branch wiring. The Entri LED luminaire is approved for mounting on combustible surfaces.

Finish

Housing is finished in five-stage super TGIC polyester powder coat paint, 2.5 mil nominal thickness for superior protection against fade and wear. LightSquare cover plates are standard white and may be specified to match finish of luminaire housing. Standard colors include black, bronze, grey, white, dark platinum and graphite metallic. RAL and custom color matches available. Consult Outdoor Architectural Colors brochure for a complete selection.

Warranty

Five-year warranty.




ENC/ENT/ENV ENTRI LED

LightSquare
Solid State LED

ARCHITECTURAL WALL
LUMINAIRE

DIMENSIONS

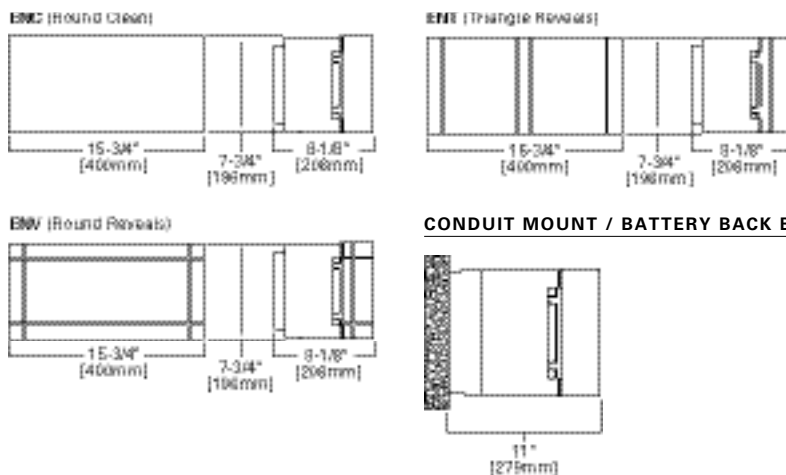

CERTIFICATION DATA

DesignLights Consortium® Qualified*
UL/cUL Listed
ISO 9001
IP66 LightSquares
LM79 / LM80 Compliant

ENERGY DATA

Electronic LED Driver
>0.9 Power Factor
<20% Total Harmonic Distortion
120-277V/50 & 60Hz, 347V/60Hz, 480V/60Hz
-30°C Minimum Temperature
40°C Ambient Temperature Rating (Optional)

SHIPPING DATA

Approximate Net Weight:
15.2 lbs. (6.9 kgs.) - Without backbox
29.1 lbs. (13.2 kgs.) - With backbox

ORDERING INFORMATION

Sample Number: ENC-SA1C-740-U-T4W-GM-ULG-HA-ZW-SWPD4BK

Domestic Preferences ²⁵	Product Family ¹	Light Engine		Color Temperature	Voltage	Distribution	Finish
		Configuration	Drive Current				
[Blank]=Standard BAA=Buy American Act TAA=Trade Agreements Act	ENC=Entri Round Clean ENT=Entri Triangle Reveals ENV=Entri Round Reveals	SA1=1 Square	A=350mA B=450mA C=600mA D=800mA E=1000mA F=1200mA	722=70CRI, 2200K ³ 727=70CRI, 2700K ³ 730=70CRI, 3000K ³ 735=70CRI, 3500K 740=70CRI, 4000K 750=70CRI, 5000K ³ 760=70CRI, 5700K ³ 827=80CRI, 2700K ³ 830=80CRI, 3000K ³ 835=80CRI, 3500K ³	U=UNV (120-277) 1=120 2=208 3=240 4=277 8=480 9=347	T2=Type II T3=Type III T4FT=Type IV Forward Throw T4W=Type IV Wide SL2=Type II w/Spill Control SL3=Type III w/Spill Control SL4=Type IV w/Spill Control SLL=90° Spill Light Eliminator Left SLR=90° Spill Light Eliminator Right	BZ=Bronze AP=Grey BK=Black DP=Dark Platinum GM=Graphite Metallic WH=White
Options (Add as Suffix)				Accessories (Order Separately) ²⁶			
F=Singled fused (Must specify voltage, fused on single hot leg of 120, 277, or 347) FF=Doubled fused (Must specify voltage, fused on both hot legs of 208, 240, or 480) X=Driver Surge Protection (6kV) Only 20K=Series 20kV UL 1449 Surge Protective Device 2L=Two-Circuit Light Engine ²⁴ DIM=0-10V Dimming Driver ^{5,6} EBP=Battery Pack with Back Box (Must specify voltage, available in 120V or 277V) ^{2,4,9} CBP=Battery Pack with Back Box, Cold Weather Rated (Must specify voltage, available in 120V or 277V) ^{2,4,10} CBP-CEC=Battery Pack with Back Box, Cold Weather Rated, CEC compliant (Must specify voltage, available in 120V or 277V) ^{2,4,10} R90=Rotated Right 90° L90=Rotated Left 90° HSS=Factory Installed House Side Shield ¹⁶ LCF=LightSquare Trim Plate Matches Housing Finish ¹⁵ ULG=Uplight Glow ⁷ HA=50°C High Ambient ⁸ WG=Wire Guard TR=Tamper Resistant Hardware BOX=Empty back box (1/2" NPT, each side with plugs installed) BPC=Button Type Photocontrol (Must specify voltage, available in 120, 208, 240, 277V, 347, and 480) AHD145=After Hours Dim, 5 Hours, 50% ¹⁷ AHD245=After Hours Dim, 6 Hours, 50% ¹⁷ AHD255=After Hours Dim, 7 Hours, 50% ¹⁷ AHD355=After Hours Dim, 8 Hours, 50% ¹⁷ SPB1=Dimming Occupancy Sensor with Bluetooth Interface, <8' Mounting ^{13,22} SPB2=Dimming Occupancy Sensor with Bluetooth Interface, 8'-20' Mounting ^{13,22} SPB4=Dimming Occupancy Sensor with Bluetooth Interface, 21'-40' Mounting ^{13,22} MS-L08=Motion Sensor for ON/OFF Operation, Up to 8' Mounting Height ^{11,12,13} MS-L20=Motion Sensor for ON/OFF Operation, 9' - 20' Mounting Height ^{11,12,13} MS/DIM-L08=Motion Sensor for Dimming Operation, Up to 8' Mounting Height ^{11,12,13} MS/DIM-L20=Motion Sensor for Dimming Operation, 9' - 20' Mounting Height ^{11,12,13} ZW=WaveLinX-enabled 4-PIN Twistlock Receptacle ^{19,20} ZW-SWPD4XX=WaveLinX Pro, Dimming Motion and Daylight, WAC Programmable, 7' - 15' Mounting ^{19,20,21} ZW-SWPD5XX=WaveLinX Pro, Dimming Motion and Daylight, WAC Programmable, 15' - 40' Mounting ^{19,20,21} CC=Coastal Construction ²³				MA1253=10kV Circuit Module Replacement MA1253-480V=10kV Circuit Module Replacement (480V only) FSIR-100-PK=Wireless Configuration Tool for Occupancy Sensor ¹¹ VA6172SA=Wireguard Accessory VA6173=Tamper-Resistant Driver Bit VA6174=Vandal Shield Accessory VA2001-XX=Thru-Way Conduit Box LS/HSS=House Side Shield (Works with all distributions listed for Entri) WOLC-7P-10A=WaveLinX Outdoor Control Module (7-pin) SWPD4-XX=WaveLinX Sensor, Dimming Motion and Daylight, WAC Programmable, 7' - 15' Mounting ^{19,20,21} SWPD5-XX=WaveLinX Sensor, Dimming Motion and Daylight, WAC Programmable, 15' - 40' Mounting ^{19,20,21}			

NOTES:

- DesignLights Consortium® Qualified. Refer to www.designlights.org Qualified Products List under Family Models for details. DLC Family Code: MMMSPQ
- EBP or CBP options limited to 25°C, 120-277V only. Control option limited to BPC=Button Type Photocontrol (must specify voltage).
- Extended lead times apply. Use dedicated IES files when performing layouts.
- Not available with HA option.
- Cannot be used with other control options.
- Low voltage control lead brought out 18" outside fixture.
- ULG only available in 740
- Not available with ULG option
- EBP is rated for minimum operating temperature of 0°C (32°F). Operates downlight for 90-minutes.
- CBP is rated for minimum operating temperature of -20°C (-4°F). Operates downlight for 90-minutes.
- The FSIR-100 configuration tool is required to adjust parameters including high and low modes, sensitivity, time delay, cutoff and more. Consult your lighting representative at Cooper Lighting
- Replace LXX with the available mounting height options: L08, L20, L40 or L40W are the only choices.
- Includes integral photosensor.
- Bronze sensor is shipped with Bronze fixtures. White sensor shipped on all other housing color options.
- Not available with HSS option.
- Only for use with SL2, SL3 and SL4 distributions. The light square trim plate is painted black when the HSS option is selected.
- Requires the use of BPC photocontrol. See After Hours Dim supplemental guide for additional information.
- Control option limited to BPC=Button Type Photocontrol (must specify voltage).
- WAC Gateway required to enable field-configurability: Order WAC-PoE and WPOE-120 (10V to PoE injector) power supply if needed.
- Requires ZW.
- Replace XX with sensor color (WH, BZ, or BK).
- Smart device with mobile application required to change system defaults. See controls section for details.
- Coastal construction finish salt spray tested to over 5,000-hours per ASTM B117, with a scribe rating of 9 per ASTM D1654.
- 2L not available with FF, ULG or AHD options. Controls and/or battery packs operate only one of the two circuits when 2L is specified.
- Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to [DOMESTIC PREFERENCES](#) website for more information. Components shipped separately may be separately analyzed under domestic preference requirements.
- Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
722 CCT	T2 (Type II)	Lumens	565	2,000	2,508	3,300	4,131	5,147	5,696
		Lumens per Watt [†]	33.0	99.5	98.7	99.1	95.8	90.0	86.2
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T2-HSS (Type II, House Side Shield)	Lumens	429	1,521	1,907	2,509	3,141	3,913	4,331
		Lumens per Watt [†]	43.5	75.7	75.1	75.3	72.9	68.4	65.5
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1
	T3 (Type III)	Lumens	578	2,046	2,566	3,376	4,226	5,265	5,827
		Lumens per Watt [†]	44.5	101.8	101.0	101.4	4,226	92.0	88.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T3-HSS (Type III, House Side Shield)	Lumens	436	1,544	1,936	2,548	3,189	3,973	4,398
		Lumens per Watt [†]	33.5	76.8	76.2	76.5	74.0	69.5	66.5
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	T4FT (Type IV Forward Throw)	Lumens	543	1,924	2,413	3,175	3,974	4,951	5,480
		Lumens per Watt [†]	41.8	95.7	95.0	95.3	92.2	86.6	82.9
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4FT-HSS (Type IV Forward Throw, House Side Shield)	Lumens	402	1,423	1,785	2,349	2,939	3,662	4,054
		Lumens per Watt [†]	30.9	70.8	70.3	70.5	68.2	64.0	61.3
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T4W (Type IV Wide)	Lumens	567	2,009	2,520	3,316	4,150	5,171	5,723
		Lumens per Watt [†]	43.6	100.0	99.2	99.6	96.3	90.4	86.6
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4W-HSS (Type IV Wide, House Side Shield)	Lumens	423	1,499	1,879	2,473	3,095	3,856	4,268
		Lumens per Watt [†]	32.5	74.6	74.0	74.3	71.8	67.4	64.6
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1
	SL2 (Type II w/ Spill Control)	Lumens	560	1,985	2,489	3,275	4,099	5,108	5,653
		Lumens per Watt [†]	43.1	98.8	98.0	98.3	95.1	89.3	85.5
		BUG Rating	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL2-HSS (Type II w/ Spill Control, House Side Shield)	Lumens	459	1,624	2,037	2,680	3,355	4,180	4,626
		Lumens per Watt [†]	35.3	80.8	80.2	80.5	77.8	73.1	70.0
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SL3 (Type III w/ Spill Control)	Lumens	557	1,971	2,472	3,253	4,072	5,073	5,615
		Lumens per Watt [†]	42.8	98.1	97.3	97.7	94.5	88.7	84.9
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL3-HSS (Type III w/ Spill Control, House Side Shield)	Lumens	475	1,684	2,111	2,779	3,478	4,333	4,796
		Lumens per Watt [†]	36.5	83.8	83.1	83.5	80.7	75.8	72.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SL4 (Type IV w/ Spill Control)	Lumens	538	1,905	2,389	3,144	3,935	4,903	5,427
		Lumens per Watt [†]	41.4	94.8	94.1	94.4	91.3	85.7	82.1
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL4-HSS (Type IV w/ Spill Control, House Side Shield)	Lumens	466	1,649	2,068	2,721	3,406	4,243	4,696
		Lumens per Watt [†]	35.8	82.0	81.4	81.7	79.0	74.2	71.0
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
722 CCT	SLR (90° Spill Light Eliminator Right)	Lumens	502	1,777	2,228	2,932	3,670	4,572	5,061
		Lumens per Watt [‡]	38.6	88.4	87.7	88.0	85.2	79.9	76.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLR-HSS (90° Spill Light Eliminator Right, House Side Shield)	Lumens	427	1,511	1,895	2,493	3,121	3,888	4,303
		Lumens per Watt [‡]	32.8	75.2	74.6	74.9	72.4	68.0	65.1
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLL (90° Spill Light Eliminator Left)	Lumens	502	1,777	2,228	2,932	3,670	4,572	5,061
		Lumens per Watt [‡]	38.6	88.4	87.7	88.0	85.2	79.9	76.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLL-HSS (90° Spill Light Eliminator Left, House Side Shield)	Lumens	427	1,511	1,895	2,493	3,121	3,888	4,303
		Lumens per Watt [‡]	32.8	75.2	74.6	74.9	72.4	68.0	65.1
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
727 CCT	T2 (Type II)	Lumens	642	2,275	2,853	3,755	4,699	5,855	6,481
		Lumens per Watt [‡]	49.4	113.2	112.3	112.8	109.0	102.4	98.0
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T2-HSS (Type II, House Side Shield)	Lumens	488	1,730	2,169	2,855	3,573	4,452	4,927
		Lumens per Watt [‡]	37.5	86.1	85.4	85.7	82.9	77.8	74.5
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1
	T3 (Type III)	Lumens	657	2,328	2,919	3,841	4,807	5,990	6,630
		Lumens per Watt [‡]	50.5	115.8	114.9	115.3	111.5	104.7	100.3
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T3-HSS (Type III, House Side Shield)	Lumens	496	1,757	2,203	2,899	3,628	4,520	5,003
		Lumens per Watt [‡]	38.2	87.4	86.7	87.1	84.2	79.0	75.7
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	T4FT (Type IV Forward Throw)	Lumens	618	2,189	2,745	3,612	4,521	5,633	6,234
		Lumens per Watt [‡]	47.5	108.9	108.1	108.5	104.9	98.5	94.3
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4FT-HSS (Type IV Forward Throw, House Side Shield)	Lumens	457	1,619	2,030	2,672	3,344	4,166	4,612
		Lumens per Watt [‡]	35.2	80.5	79.9	80.2	77.6	72.8	69.8
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4W (Type IV Wide)	Lumens	645	2,286	2,867	3,772	4,721	5,883	6,511
		Lumens per Watt [‡]	49.6	113.7	112.9	113.3	109.5	102.8	98.5
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	T4W-HSS (Type IV Wide, House Side Shield)	Lumens	481	1,705	2,138	2,813	3,521	4,387	4,856
		Lumens per Watt [‡]	37.0	84.8	84.2	84.5	81.7	76.7	73.5
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2
	SL2 (Type II w/Spill Control)	Lumens	638	2,258	2,832	3,726	4,664	5,811	6,431
		Lumens per Watt [‡]	49.1	112.3	111.5	111.9	108.2	101.6	97.3
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
SL2-HSS (Type II w/Spill Control, House Side Shield)	Lumens	522	1,848	2,317	3,049	3,817	4,755	5,263	
	Lumens per Watt [‡]	40.2	91.9	91.2	91.6	88.6	83.1	79.6	
	BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
727 CCT	SL3 (Type III w/Spill Control)	Lumens	633	2,243	2,813	3,701	4,632	5,771	6,388
		Lumens per Watt [†]	48.7	111.6	110.7	111.1	107.5	100.9	96.6
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL3-HSS (Type III w/Spill Control, House Side Shield)	Lumens	541	1,915	2,402	3,161	3,956	4,929	5,456
		Lumens per Watt [†]	41.6	95.3	94.6	94.9	91.8	86.2	82.5
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL4 (Type IV w/Spill Control)	Lumens	612	2,168	2,718	3,577	4,477	5,578	6,174
		Lumens per Watt [†]	47.1	107.9	107.0	107.4	103.9	97.5	93.4
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	SL4-HSS (Type IV w/Spill Control, House Side Shield)	Lumens	530	1,876	2,352	3,096	3,874	4,827	5,343
		Lumens per Watt [†]	40.8	93.3	92.6	93.0	89.9	84.4	80.8
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLR (90° Spill Light Eliminator Right)	Lumens	571	2,021	2,535	3,336	4,175	5,202	5,758
		Lumens per Watt [†]	43.9	100.5	99.8	100.2	96.9	90.9	87.1
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SLR-HSS (90° Spill Light Eliminator Right, House Side Shield)	Lumens	485	1,719	2,156	2,837	3,550	4,423	4,896
		Lumens per Watt [†]	37.3	85.5	84.9	85.2	82.4	77.3	74.1
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLL (90° Spill Light Eliminator Left)	Lumens	571	2,021	2,535	3,336	4,175	5,202	5,758
		Lumens per Watt [†]	43.9	100.5	99.8	100.2	96.9	90.9	87.1
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SLL-HSS (90° Spill Light Eliminator Left, House Side Shield)	Lumens	485	1,719	2,156	2,837	3,550	4,423	4,896
		Lumens per Watt [†]	37.3	85.5	84.9	85.2	82.4	77.3	74.1
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
730 CCT	T2 (Type II)	Lumens	700	2,478	3,107	4,089	5,117	6,376	7,057
		Lumens per Watt [†]	53.8	123.3	122.3	122.8	118.7	111.5	106.8
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T2-HSS (Type II, House Side Shield)	Lumens	532	1,884	2,362	3,109	3,891	4,848	5,366
		Lumens per Watt [†]	40.9	93.7	93.0	93.4	90.3	84.8	81.2
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2
	T3 (Type III)	Lumens	716	2,535	3,179	4,183	5,235	6,523	7,219
		Lumens per Watt [†]	55.1	126.1	125.2	125.6	121.5	114.0	109.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T3-HSS (Type III, House Side Shield)	Lumens	540	1,913	2,399	3,157	3,951	4,922	5,448
		Lumens per Watt [†]	41.5	95.2	94.4	94.8	91.7	86.0	82.4
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	T4FT (Type IV Forward Throw)	Lumens	673	2,384	2,989	3,933	4,923	6,134	6,789
		Lumens per Watt [†]	51.8	118.6	117.7	118.1	114.2	107.2	102.7
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	T4FT-HSS (Type IV Forward Throw, House Side Shield)	Lumens	498	1,763	2,211	2,910	3,642	4,537	5,022
		Lumens per Watt [†]	38.3	87.7	87.0	87.4	84.5	79.3	76.0
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
730 CCT	T4W (Type IV Wide)	Lumens	703	2,489	3,122	4,108	5,141	6,406	7,090
		Lumens per Watt [†]	54.1	123.8	122.9	123.4	119.3	112.0	107.3
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	T4W-HSS (Type IV Wide, House Side Shield)	Lumens	524	1,857	2,328	3,064	3,835	4,778	5,288
		Lumens per Watt [†]	40.3	92.4	91.7	92.0	89.0	83.5	80.0
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2	B1-U0-G2
	SL2 (Type II w/Spill Control)	Lumens	694	2,459	3,084	4,058	5,079	6,328	7,004
		Lumens per Watt [†]	53.4	122.3	121.4	121.9	117.8	110.6	106.0
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2U0-G2
	SL2-HSS (Type II w/Spill Control, House Side Shield)	Lumens	568	2,012	2,524	3,321	4,156	5,178	5,732
		Lumens per Watt [†]	43.7	100.1	99.4	99.7	96.4	90.5	86.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL3 (Type III w/Spill Control)	Lumens	690	2,442	3,063	4,030	5,044	6,285	6,956
		Lumens per Watt [†]	53.1	121.5	120.6	121.0	117.0	109.9	105.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	SL3-HSS (Type III w/Spill Control, House Side Shield)	Lumens	589	2,086	2,616	3,442	4,308	5,368	5,941
		Lumens per Watt [†]	45.3	103.8	103.0	103.4	100.0	93.8	89.9
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL4 (Type IV w/Spill Control)	Lumens	666	2,361	2,960	3,895	4,875	6,074	6,723
		Lumens per Watt [†]	51.2	117.5	116.5	117.0	113.1	106.2	101.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	SL4-HSS (Type IV w/Spill Control, House Side Shield)	Lumens	577	2,043	2,562	3,371	4,219	5,257	5,818
		Lumens per Watt [†]	44.4	101.6	100.9	101.2	97.9	91.9	88.0
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLR (90° Spill Light Eliminator Right)	Lumens	622	2,201	2,761	3,633	4,547	5,665	6,270
		Lumens per Watt [†]	47.8	109.5	108.7	109.1	105.5	99.0	94.9
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLR-HSS (90° Spill Light Eliminator Right, House Side Shield)	Lumens	529	1,872	2,347	3,089	3,866	4,817	5,331
		Lumens per Watt [†]	40.7	93.1	92.4	92.8	89.7	84.2	80.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLL (90° Spill Light Eliminator Left)	Lumens	622	2,201	2,761	3,633	4,547	5,665	6,270
		Lumens per Watt [†]	47.8	109.5	108.7	109.1	105.5	99.0	94.9
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SLL-HSS (90° Spill Light Eliminator Left, House Side Shield)	Lumens	529	1,872	2,347	3,089	3,866	4,817	5,331
		Lumens per Watt [†]	40.7	93.1	92.4	92.8	89.7	84.2	80.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
735 CCT	T2 (Type II)	Lumens	722	2,556	3,205	4,218	5,279	6,577	7,279
		Lumens per Watt [†]	55.5	127.2	126.2	126.7	122.5	115.0	110.1
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T2-HSS (Type II, House Side Shield)	Lumens	549	1,943	2,437	3,207	4,013	5,000	5,535
		Lumens per Watt [†]	42.2	96.7	95.9	96.3	93.1	87.4	83.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
735 CCT	T3 (Type III)	Lumens	738	2,614	3,279	4,314	5,400	6,728	7,447
		Lumens per Watt [†]	56.8	130.0	129.1	129.5	125.3	117.6	112.7
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T3-HSS (Type III, House Side Shield)	Lumens	557	1,973	2,474	3,256	4,075	5,077	5,620
		Lumens per Watt [†]	42.8	98.2	97.4	97.8	94.5	88.8	85.0
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T4FT (Type IV Forward Throw)	Lumens	694	2,459	3,083	4,057	5,078	6,327	7,003
		Lumens per Watt [†]	53.4	122.3	121.4	121.8	117.8	110.6	105.9
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	T4FT-HSS (Type IV Forward Throw, House Side Shield)	Lumens	514	1,819	2,281	3,001	3,756	4,680	5,180
		Lumens per Watt [†]	39.5	90.5	89.8	90.1	87.1	81.8	78.4
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4W (Type IV Wide)	Lumens	725	2,568	3,220	4,237	5,303	6,608	7,314
		Lumens per Watt [†]	55.8	127.8	126.8	127.2	123.0	115.5	110.7
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	T4W-HSS (Type IV Wide, House Side Shield)	Lumens	541	1,915	2,402	3,160	3,955	4,928	5,455
		Lumens per Watt [†]	41.6	95.3	94.6	94.9	91.8	86.2	82.5
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL2 (Type II w/Spill Control)	Lumens	716	2,536	3,181	4,186	5,239	6,527	7,224
		Lumens per Watt [†]	55.1	126.2	125.2	125.7	121.6	114.1	109.3
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G2
	SL2-HSS (Type II w/Spill Control, House Side Shield)	Lumens	586	2,076	2,603	3,425	4,287	5,341	5,912
		Lumens per Watt [†]	45.1	103.3	102.5	102.9	99.5	93.4	89.4
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL3 (Type III w/Spill Control)	Lumens	711	2,519	3,159	4,157	5,203	6,483	7,175
		Lumens per Watt [†]	54.7	125.3	124.4	124.8	120.7	113.3	108.5
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	SL3-HSS (Type III w/Spill Control, House Side Shield)	Lumens	608	2,152	2,698	3,551	4,444	5,537	6,128
		Lumens per Watt [†]	46.8	107.1	106.2	106.6	103.1	96.8	92.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL4 (Type IV w/Spill Control)	Lumens	687	2,435	3,053	4,018	5,029	6,266	6,935
		Lumens per Watt [†]	52.8	121.1	120.2	120.7	116.7	109.5	104.9
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	SL4-HSS (Type IV w/Spill Control, House Side Shield)	Lumens	595	2,107	2,642	3,477	4,352	5,422	6,001
		Lumens per Watt [†]	45.8	104.8	104.0	104.4	101.0	94.8	90.8
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	SLR (90° Spill Light Eliminator Right)	Lumens	641	2,271	2,847	3,747	4,690	5,843	6,467
		Lumens per Watt [†]	49.3	113.0	112.1	112.5	108.8	102.2	97.8
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLR-HSS (90° Spill Light Eliminator Right, House Side Shield)	Lumens	545	1,931	2,421	3,186	3,988	4,968	5,499
		Lumens per Watt [†]	41.9	96.1	95.3	95.7	92.5	86.9	83.2
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)		120-277V±	13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)		120V	--	0.17	0.22	0.29	0.38	0.48	0.56
		277V	--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)		347V or 480V	--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)		347V	--	0.07	0.08	0.11	0.15	0.18	0.21
		480V	--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
735 CCT	SLL (90° Spill Light Eliminator Left)	Lumens	641	2,271	2,847	3,747	4,690	5,843	6,467
		Lumens per Watt [†]	49.3	113.0	112.1	112.5	108.8	102.2	97.8
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLL-HSS (90° Spill Light Eliminator Left, House Side Shield)	Lumens	545	1,931	2,421	3,186	3,988	4,968	5,499
		Lumens per Watt [†]	41.9	96.1	95.3	95.7	92.5	86.9	83.2
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
740 CCT	T2 (Type II)	Lumens	768	2,721	3,412	4,490	5,619	7,001	7,749
		Lumens per Watt [†]	59.1	135.4	134.3	134.8	130.4	122.4	117.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	T2-HSS (Type II, House Side Shield)	Lumens	584	2,069	2,594	3,414	4,272	5,323	5,892
		Lumens per Watt [†]	44.9	102.9	102.1	102.5	99.1	93.1	89.1
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2	B1-U0-G2
	T2-ULG (Type III, House Side Shield)	Lumens	768	4,499	5,190	6,268	7,397	8,779	9,527
		Lumens per Watt [†]	59.1	122.3	123.3	125.4	123.7	118.8	115.1
		BUG Rating	--	--	--	--	--	--	--
	T2-HSS-ULG (Type III, House Side Shield)	Lumens	584	3,847	4,372	5,192	6,050	7,101	7,670
		Lumens per Watt [†]	44.9	104.5	103.8	103.8	101.2	96.1	92.6
		BUG Rating	--	--	--	--	--	--	--
	T3 (Type III)	Lumens	786	2,783	3,490	4,593	5,748	7,162	7,927
		Lumens per Watt [†]	60.5	138.5	137.4	137.9	133.4	125.2	119.9
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G2
	T3-HSS (Type III, House Side Shield)	Lumens	593	2,100	2,634	3,466	4,338	5,405	5,982
		Lumens per Watt [†]	45.6	104.5	103.7	104.1	100.6	94.5	90.5
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T3-ULG (Type III, House Side Shield)	Lumens	786	4,561	5,268	6,371	7,526	8,940	9,705
		Lumens per Watt [†]	60.5	123.9	125.1	127.4	125.9	121.0	117.2
		BUG Rating	--	--	--	--	--	--	--
	T3-HSS-ULG (Type III, House Side Shield)	Lumens	593	3,878	4,412	5,244	6,116	7,183	7,760
		Lumens per Watt [†]	45.6	105.4	104.8	104.9	102.3	97.2	93.7
		BUG Rating	--	--	--	--	--	--	--
	T4FT (Type IV Forward Throw)	Lumens	739	2,617	3,282	4,319	5,406	6,735	7,455
		Lumens per Watt [†]	56.8	130.2	129.2	129.7	125.4	117.7	112.8
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	T4FT-HSS (Type IV Forward Throw, House Side Shield)	Lumens	547	1,936	2,428	3,195	3,999	4,982	5,514
		Lumens per Watt [†]	42.1	96.3	95.6	95.9	92.8	87.1	83.4
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4FT-ULG (Type III, House Side Shield)	Lumens	739	4,395	5,060	6,097	7,184	8,513	9,233
		Lumens per Watt [†]	56.8	119.4	120.2	121.9	120.1	115.2	111.5
		BUG Rating	--	--	--	--	--	--	--
	T4FT-HSS-ULG (Type III, House Side Shield)	Lumens	547	3,714	4,206	4,973	5,777	6,760	7,292
		Lumens per Watt [†]	42.1	100.9	99.9	99.5	96.6	91.5	88.1
		BUG Rating	--	--	--	--	--	--	--

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
740 CCT	T4W (Type IV Wide)	Lumens	772	2,733	3,428	4,511	5,646	7,034	7,785
		Lumens per Watt†	59.4	136.0	135.0	135.5	131.0	123.0	117.8
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G2
	T4W-HSS (Type IV Wide, House Side Shield)	Lumens	576	2,039	2,556	3,364	4,210	5,246	5,806
		Lumens per Watt†	44.3	101.4	100.6	101.0	97.7	91.7	87.8
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4W-ULG (Type III, House Side Shield)	Lumens	772	4,511	5,206	6,289	7,424	8,812	9,563
		Lumens per Watt†	59.4	122.6	123.7	125.8	124.1	119.2	115.5
		BUG Rating	--	--	--	--	--	--	--
	T4W-HSS-ULG (Type III, House Side Shield)	Lumens	576	3,817	4,334	5,142	5,988	7,024	7,584
		Lumens per Watt†	44.3	103.7	102.9	102.8	100.1	95.0	91.6
		BUG Rating	--	--	--	--	--	--	--
	SL2 (Type II w/Spill Control)	Lumens	762	2,700	3,386	4,456	5,577	6,948	7,690
		Lumens per Watt†	58.6	134.3	133.3	133.8	129.4	121.5	116.3
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G2
	"SL2-HSS (Type II w/Spill Control, House Side Shield)	Lumens	624	2,210	2,771	3,646	4,564	5,686	6,293
		Lumens per Watt†	48.0	110.0	109.1	109.5	105.9	99.4	95.2
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	"SL2-ULG (Type III, House Side Shield)"	Lumens	762	4,478	5,164	6,234	7,355	8,726	9,468
		Lumens per Watt†	58.6	121.7	122.7	124.7	123.0	118.1	114.3
		BUG Rating	--	--	--	--	--	--	--
	"SL2-HSS-ULG (Type III, House Side Shield)"	Lumens	624	3,988	4,549	5,424	6,342	7,464	8,071
		Lumens per Watt†	48.0	108.4	108.1	108.5	106.1	101.0	97.5
		BUG Rating	--	--	--	--	--	--	--
	"SL3 (Type III w/Spill Control)"	Lumens	757	2,682	3,363	4,425	5,539	6,901	7,638
		Lumens per Watt†	58.2	133.4	132.4	132.9	128.5	120.6	115.6
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	"SL3-HSS (Type III w/Spill Control, House Side Shield)"	Lumens	647	2,290	2,872	3,780	4,731	5,894	6,524
		Lumens per Watt†	49.8	113.9	113.1	113.5	109.8	103.0	98.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	"SL3-ULG (Type III, House Side Shield)"	Lumens	757	4,460	5,141	6,203	7,317	8,679	9,416
		Lumens per Watt†	58.2	121.2	122.1	124.1	122.4	117.4	113.7
		BUG Rating	--	--	--	--	--	--	--
	"SL3-HSS-ULG (Type III, House Side Shield)"	Lumens	647	4,068	4,650	5,558	6,509	7,672	8,302
		Lumens per Watt†	49.8	110.5	110.5	111.2	108.8	103.8	100.3
		BUG Rating	--	--	--	--	--	--	--
	"SL4 (Type IV w/Spill Control)"	Lumens	732	2,592	3,250	4,277	5,353	6,670	7,383
		Lumens per Watt†	56.3	129.0	128.0	128.4	124.2	116.6	111.7
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	"SL4-HSS (Type IV w/Spill Control, House Side Shield)"	Lumens	633	2,243	2,813	3,701	4,633	5,772	6,389
		Lumens per Watt†	48.7	111.6	110.7	111.1	107.5	100.9	96.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
740 CCT	SL4-ULG (Type III, House Side Shield)	Lumens	732	4,370	5,028	6,055	7,131	8,448	9,161
		Lumens per Watt [‡]	56.3	118.8	119.4	121.1	119.2	114.3	110.6
		BUG Rating	--	--	--	--	--	--	--
	SL4-HSS-ULG (Type III, House Side Shield)	Lumens	633	4,021	4,591	5,479	6,411	7,550	8,167
		Lumens per Watt [‡]	48.7	109.3	109.0	109.6	107.2	102.2	98.6
		BUG Rating	--	--	--	--	--	--	--
	SLR (90° Spill Light Eliminator Right)	Lumens	682	2,417	3,031	3,989	4,992	6,220	6,885
		Lumens per Watt [‡]	52.5	120.2	119.3	119.8	115.8	108.7	104.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLR-HSS (90° Spill Light Eliminator Right, House Side Shield)	Lumens	580	2,055	2,577	3,392	4,245	5,289	5,854
		Lumens per Watt [‡]	44.6	102.2	101.5	101.9	98.5	92.5	88.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SLR-ULG (Type III, House Side Shield)	Lumens	682	4,195	4,809	5,767	6,770	7,998	8,663
		Lumens per Watt [‡]	52.5	114.0	114.2	115.3	113.2	108.2	104.6
		BUG Rating	--	--	--	--	--	--	--
	SLR-HSS-ULG (Type III, House Side Shield)	Lumens	580	3,833	4,355	5,170	6,023	7,067	7,632
		Lumens per Watt [‡]	44.6	104.2	103.4	103.4	100.7	95.6	92.2
		BUG Rating	--	--	--	--	--	--	--
	SLL (90° Spill Light Eliminator Left)	Lumens	682	2,417	3,031	3,989	4,992	6,220	6,885
		Lumens per Watt [‡]	52.5	120.2	119.3	119.8	115.8	108.7	104.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLL-HSS (90° Spill Light Eliminator Left, House Side Shield)	Lumens	580	2,055	2,577	3,392	4,245	5,289	5,854
		Lumens per Watt [‡]	44.6	102.2	101.5	101.9	98.5	92.5	88.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLL-ULG (Type III, House Side Shield)	Lumens	682	4,195	4,809	5,767	6,770	7,998	8,663
		Lumens per Watt [‡]	52.5	114.0	114.2	115.3	113.2	108.2	104.6
		BUG Rating	--	--	--	--	--	--	--
	SLL-HSS-ULG (Type III, House Side Shield)	Lumens	580	3,833	4,355	5,170	6,023	7,067	7,632
		Lumens per Watt [‡]	44.6	104.2	103.4	103.4	100.7	95.6	92.2
		BUG Rating	--	--	--	--	--	--	--
750 CCT	T2 (Type II)	Lumens	768	2,721	3,412	4,490	5,619	7,001	7,749
		Lumens per Watt [‡]	59.1	135.4	134.3	134.8	130.4	122.4	117.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	T2-HSS (Type II, House Side Shield)	Lumens	584	2,069	2,594	3,414	4,272	5,323	5,892
		Lumens per Watt [‡]	44.9	102.9	102.1	102.5	99.1	93.1	89.1
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2	B1-U0-G2
	T3 (Type III)	Lumens	786	2,783	3,490	4,593	5,748	7,162	7,927
		Lumens per Watt [‡]	60.5	138.5	137.4	137.9	133.4	125.2	119.9
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G2
	T3-HSS (Type III, House Side Shield)	Lumens	593	2,100	2,634	3,466	4,338	5,405	5,982
		Lumens per Watt [‡]	45.6	104.5	103.7	104.1	100.6	94.5	90.5
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
750 CCT	T4FT (Type IV Forward Throw)	Lumens	739	2,617	3,282	4,319	5,406	6,735	7,455
		Lumens per Watt [†]	56.8	130.2	129.2	129.7	125.4	117.7	112.8
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	T4FT-HSS (Type IV Forward Throw, House Side Shield)	Lumens	547	1,936	2,428	3,195	3,999	4,982	5,514
		Lumens per Watt [†]	42.1	96.3	95.6	95.9	92.8	87.1	83.4
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4W (Type IV Wide)	Lumens	772	2,733	3,428	4,511	5,646	7,034	7,785
		Lumens per Watt [†]	59.4	136.0	135.0	135.5	131.0	123.0	117.8
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G2
	T4W-HSS (Type IV Wide, House Side Shield)	Lumens	576	2,039	2,556	3,364	4,210	5,246	5,806
		Lumens per Watt [†]	44.3	101.4	100.6	101.0	97.7	91.7	87.8
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL2 (Type II w/Spill Control)	Lumens	762	2,700	3,386	4,456	5,577	6,948	7,690
		Lumens per Watt [†]	58.6	134.3	133.3	133.8	129.4	121.5	116.3
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G2
	SL2-HSS (Type II w/Spill Control, House Side Shield)	Lumens	624	2,210	2,771	3,646	4,564	5,686	6,293
		Lumens per Watt [†]	48.0	110.0	109.1	109.5	105.9	99.4	95.2
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL3 (Type III w/Spill Control)	Lumens	757	2,682	3,363	4,425	5,539	6,901	7,638
		Lumens per Watt [†]	58.2	133.4	132.4	132.9	128.5	120.6	115.6
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	SL3-HSS (Type III w/Spill Control, House Side Shield)	Lumens	647	2,290	2,872	3,780	4,731	5,894	6,524
		Lumens per Watt [†]	49.8	113.9	113.1	113.5	109.8	103.0	98.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL4 (Type IV w/Spill Control)	Lumens	732	2,592	3,250	4,277	5,353	6,670	7,383
		Lumens per Watt [†]	56.3	129.0	128.0	128.4	124.2	116.6	111.7
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	SL4-HSS (Type IV w/Spill Control, House Side Shield)	Lumens	633	2,243	2,813	3,701	4,633	5,772	6,389
		Lumens per Watt [†]	48.7	111.6	110.7	111.1	107.5	100.9	96.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	SLR (90° Spill Light Eliminator Right)	Lumens	682	2,417	3,031	3,989	4,992	6,220	6,885
		Lumens per Watt [†]	52.5	120.2	119.3	119.8	115.8	108.7	104.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLR-HSS (90° Spill Light Eliminator Right, House Side Shield)	Lumens	580	2,055	2,577	3,392	4,245	5,289	5,854
		Lumens per Watt [†]	44.6	102.2	101.5	101.9	98.5	92.5	88.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SLL (90° Spill Light Eliminator Left)	Lumens	682	2,417	3,031	3,989	4,992	6,220	6,885
		Lumens per Watt [†]	52.5	120.2	119.3	119.8	115.8	108.7	104.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLL-HSS (90° Spill Light Eliminator Left, House Side Shield)	Lumens	580	2,055	2,577	3,392	4,245	5,289	5,854
		Lumens per Watt [†]	44.6	102.2	101.5	101.9	98.5	92.5	88.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1

POWER AND LUMENS

1 LightSquare (SA Series)		ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)		EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±	13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V	--	0.17	0.22	0.29	0.38	0.48	0.56
	277V	--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V	--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V	--	0.07	0.08	0.11	0.15	0.18	0.21
	480V	--	0.05	0.06	0.08	0.11	0.13	0.16
Optics								
760 CCT	T2 (Type II)	Lumens	768	2,721	3,412	4,490	5,619	7,001
		Lumens per Watt [†]	59.1	135.4	134.3	134.8	130.4	122.4
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T2-HSS (Type II, House Side Shield)	Lumens	584	2,069	2,594	3,414	4,272	5,892
		Lumens per Watt [†]	44.9	102.9	102.1	102.5	99.1	93.1
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2	B1-U0-G2
	T3 (Type III)	Lumens	786	2,783	3,490	4,593	5,748	7,162
		Lumens per Watt [†]	60.5	138.5	137.4	137.9	133.4	125.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B2-U0-G2
	T3-HSS (Type III, House Side Shield)	Lumens	593	2,100	2,634	3,466	4,338	5,405
		Lumens per Watt [†]	45.6	104.5	103.7	104.1	100.6	94.5
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T4FT (Type IV Forward Throw)	Lumens	739	2,617	3,282	4,319	5,406	6,735
		Lumens per Watt [†]	56.8	130.2	129.2	129.7	125.4	117.7
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4FT-HSS (Type IV Forward Throw, House Side Shield)	Lumens	547	1,936	2,428	3,195	3,999	4,982
		Lumens per Watt [†]	42.1	96.3	95.6	95.9	92.8	87.1
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T4W (Type IV Wide)	Lumens	772	2,733	3,428	4,511	5,646	7,034
		Lumens per Watt [†]	59.4	136.0	135.0	135.5	131.0	123.0
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B2-U0-G2
	T4W-HSS (Type IV Wide, House Side Shield)	Lumens	576	2,039	2,556	3,364	4,210	5,246
		Lumens per Watt [†]	44.3	101.4	100.6	101.0	97.7	91.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2
	SL2 (Type II w/Spill Control)	Lumens	762	2,700	3,386	4,456	5,577	6,948
		Lumens per Watt [†]	58.6	134.3	133.3	133.8	129.4	121.5
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B2-U0-G2
	SL2-HSS (Type II w/Spill Control, House Side Shield)	Lumens	624	2,210	2,771	3,646	4,564	5,686
		Lumens per Watt [†]	48.0	110.0	109.1	109.5	105.9	99.4
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SL3 (Type III w/Spill Control)	Lumens	757	2,682	3,363	4,425	5,539	6,901
		Lumens per Watt [†]	58.2	133.4	132.4	132.9	128.5	120.6
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL3-HSS (Type III w/Spill Control, House Side Shield)	Lumens	647	2,290	2,872	3,780	4,731	5,894
		Lumens per Watt [†]	49.8	113.9	113.1	113.5	109.8	103.0
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SL4 (Type IV w/Spill Control)	Lumens	732	2,592	3,250	4,277	5,353	6,670
		Lumens per Watt [†]	56.3	129.0	128.0	128.4	124.2	116.6
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL4-HSS (Type IV w/Spill Control, House Side Shield)	Lumens	633	2,243	2,813	3,701	4,633	5,772
		Lumens per Watt [†]	48.7	111.6	110.7	111.1	107.5	100.9
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2	B1-U0-G2

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
760 CCT	SLR (90° Spill Light Eliminator Right)	Lumens	682	2,417	3,031	3,989	4,992	6,220	6,885
		Lumens per Watt [†]	52.5	120.2	119.3	119.8	115.8	108.7	104.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLR-HSS (90° Spill Light Eliminator Right, House Side Shield)	Lumens	580	2,055	2,577	3,392	4,245	5,289	5,854
		Lumens per Watt [†]	44.6	102.2	101.5	101.9	98.5	92.5	88.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SLL (90° Spill Light Eliminator Left)	Lumens	682	2,417	3,031	3,989	4,992	6,220	6,885
		Lumens per Watt [†]	52.5	120.2	119.3	119.8	115.8	108.7	104.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLL-HSS (90° Spill Light Eliminator Left, House Side Shield)	Lumens	580	2,055	2,577	3,392	4,245	5,289	5,854
		Lumens per Watt [†]	44.6	102.2	101.5	101.9	98.5	92.5	88.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
827 CCT	T2 (Type II)	Lumens	565	2,000	2,508	3,300	4,131	5,147	5,696
		Lumens per Watt [†]	43.5	99.5	98.7	99.1	95.8	90.0	86.2
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T2-HSS (Type II, House Side Shield)	Lumens	429	1,521	1,907	2,509	3,141	3,913	4,331
		Lumens per Watt [†]	33.0	75.7	75.1	75.3	72.9	68.4	65.5
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1
	T3 (Type III)	Lumens	578	2,046	2,566	3,376	4,226	5,265	5,825
		Lumens per Watt [†]	44.5	101.8	101.0	101.4	98.1	92.0	88.1
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T3-HSS (Type III, House Side Shield)	Lumens	436	1,544	1,936	2,548	3,189	3,973	4,398
		Lumens per Watt [†]	33.5	76.8	76.2	76.5	74.0	69.5	66.5
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	T4FT (Type IV Forward Throw)	Lumens	543	1,924	2,413	3,175	3,974	4,951	5,480
		Lumens per Watt [†]	41.8	95.7	95.0	95.3	92.2	86.6	82.9
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4FT-HSS (Type IV Forward Throw, House Side Shield)	Lumens	402	1,423	1,785	2,349	2,939	3,662	4,054
		Lumens per Watt [†]	30.9	70.8	70.3	70.5	68.2	64.0	61.3
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T4W (Type IV Wide)	Lumens	567	2,009	2,520	3,316	4,150	5,171	5,723
		Lumens per Watt [†]	43.6	100.0	99.2	99.6	96.3	90.4	86.6
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4W-HSS (Type IV Wide, House Side Shield)	Lumens	423	1,499	1,879	2,473	3,095	3,856	4,268
		Lumens per Watt [†]	32.5	74.6	74.0	74.3	71.8	67.4	64.6
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1
	SL2 (Type II w/Spill Control)	Lumens	560	1,985	2,489	3,275	4,099	5,108	5,653
		Lumens per Watt [†]	43.1	98.8	98.0	98.3	95.1	89.3	85.5
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL2-HSS (Type II w/Spill Control, House Side Shield)	Lumens	459	1,624	2,037	2,680	3,355	4,180	4,626
		Lumens per Watt [†]	35.3	80.8	80.2	80.5	77.8	73.1	70.0
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
827 CCT	SL3 (Type III w/Spill Control)	Lumens	557	1,971	2,472	3,253	4,072	5,073	5,615
		Lumens per Watt [†]	42.8	98.1	97.3	97.7	94.5	88.7	84.9
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL3-HSS (Type III w/Spill Control, House Side Shield)	Lumens	475	1,684	2,111	2,779	3,478	4,333	4,796
		Lumens per Watt [†]	36.5	83.8	83.1	83.5	80.7	75.8	72.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SL4 (Type IV w/Spill Control)	Lumens	538	1,905	2,389	3,144	3,935	4,903	5,427
		Lumens per Watt [†]	41.4	94.8	94.1	94.4	91.3	85.7	82.1
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL4-HSS (Type IV w/Spill Control, House Side Shield)	Lumens	466	1,649	2,068	2,721	3,406	4,243	4,696
		Lumens per Watt [†]	35.8	82.0	81.4	81.7	79.0	74.2	71.0
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2
	SLR (90° Spill Light Eliminator Right)	Lumens	502	1,777	2,228	2,932	3,670	4,572	5,061
		Lumens per Watt [†]	38.6	88.4	87.7	88.0	85.2	79.9	76.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLR-HSS (90° Spill Light Eliminator Right, House Side Shield)	Lumens	427	1,511	1,895	2,493	3,121	3,888	4,303
		Lumens per Watt [†]	32.8	75.2	74.6	74.9	72.4	68.0	65.1
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLL (90° Spill Light Eliminator Left)	Lumens	502	1,777	2,228	2,932	3,670	4,572	5,061
		Lumens per Watt [†]	38.6	88.4	87.7	88.0	85.2	79.9	76.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLL-HSS (90° Spill Light Eliminator Left, House Side Shield)	Lumens	427	1,511	1,895	2,493	3,121	3,888	4,303
		Lumens per Watt [†]	32.8	75.2	74.6	74.9	72.4	68.0	65.1
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
830 CCT	T2 (Type II)	Lumens	610	2,162	2,711	3,568	4,465	5,563	6,158
		Lumens per Watt [†]	46.9	107.6	106.7	107.1	103.6	97.3	93.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T2-HSS (Type II, House Side Shield)	Lumens	464	1,644	2,061	2,713	3,395	4,230	4,682
		Lumens per Watt [†]	35.7	81.8	81.1	81.5	78.8	74.0	70.8
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1
	T3 (Type III)	Lumens	624	2,212	2,773	3,650	4,568	5,691	6,299
		Lumens per Watt [†]	48.0	110.0	109.2	109.6	106.0	99.5	95.3
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T3-HSS (Type III, House Side Shield)	Lumens	471	1,669	2,093	2,754	3,447	4,295	4,754
		Lumens per Watt [†]	36.2	83.0	82.4	82.7	80.0	75.1	71.9
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	T4FT (Type IV Forward Throw)	Lumens	587	2,080	2,608	3,432	4,296	5,352	5,924
		Lumens per Watt [†]	45.2	103.5	102.7	103.1	99.7	93.6	89.6
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4FT-HSS (Type IV Forward Throw, House Side Shield)	Lumens	434	1,538	1,929	2,539	3,177	3,959	4,382
		Lumens per Watt [†]	33.4	76.5	75.9	76.2	73.7	69.2	66.3
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
830 CCT	T4W (Type IV Wide)	Lumens	613	2,172	2,724	3,584	4,486	5,590	6,187
		Lumens per Watt [‡]	47.2	108.1	107.2	107.6	104.1	97.7	93.6
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4W-HSS (Type IV Wide, House Side Shield)	Lumens	457	1,620	2,032	2,673	3,346	4,169	4,614
		Lumens per Watt [‡]	35.2	80.6	80.0	80.3	77.6	72.9	69.8
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2
	SL2 (Type II w/Spill Control)1	Lumens	606	2,146	2,691	3,541	4,431	5,521	6,111
		Lumens per Watt [‡]	46.6	106.8	105.9	106.3	102.8	96.5	92.5
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL2-HSS (Type II w/Spill Control, House Side Shield)	Lumens	496	1,756	2,202	2,898	3,626	4,518	5,001
		Lumens per Watt [‡]	38.2	87.4	86.7	87.0	84.1	79.0	75.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SL3 (Type III w/Spill Control)	Lumens	602	2,131	2,672	3,517	4,401	5,484	6,070
		Lumens per Watt [‡]	46.3	106.0	105.2	105.6	102.1	95.9	91.8
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL3-HSS (Type III w/Spill Control, House Side Shield)	Lumens	514	1,820	2,282	3,004	3,759	4,684	5,184
		Lumens per Watt [‡]	39.5	90.5	89.8	90.2	87.2	81.9	78.4
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SL4 (Type IV w/Spill Control)	Lumens	582	2,060	2,583	3,399	4,254	5,300	5,867
		Lumens per Watt [‡]	44.8	102.5	101.7	102.1	98.7	92.7	88.8
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL4-HSS (Type IV w/Spill Control, House Side Shield)	Lumens	503	1,782	2,235	2,941	3,681	4,587	5,077
		Lumens per Watt [‡]	38.7	88.7	88.0	88.3	85.4	80.2	76.8
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2	B1-U0-G2
	SLR (90° Spill Light Eliminator Right)	Lumens	542	1,921	2,409	3,170	3,967	4,943	5,471
		Lumens per Watt [‡]	41.7	95.6	94.8	95.2	92.0	86.4	82.8
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLR-HSS (90° Spill Light Eliminator Right, House Side Shield)	Lumens	461	1,633	2,048	2,695	3,373	4,203	4,652
		Lumens per Watt [‡]	35.5	81.2	80.6	80.9	78.3	73.5	70.4
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLL (90° Spill Light Eliminator Left)	Lumens	542	1,921	2,409	3,170	3,967	4,943	5,471
		Lumens per Watt [‡]	42	96	95	95	92	86	83
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLL-HSS (90° Spill Light Eliminator Left, House Side Shield)	Lumens	461	1,633	2,048	2,695	3,373	4,203	4,652
		Lumens per Watt [‡]	35.5	81.2	80.6	80.9	78.3	73.5	70.4
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1


LUMEN MAINTENANCE

SA1 (All Drive Currents)					
Hours	25,000 hours*	50,000 hours*	60,000 hours*	100,000 hours**	Theoretical L70 (Hours)**
25 °C	99.4%	99.0%	98.9%	98.3%	2,471,000
40 °C	99.4%	99.0%	98.9%	98.3%	2,471,000
50 °C	99.4%	99.0%	98.9%	98.3%	2,471,000

* Supported by IES TM-21 standards
** Theoretical values represent estimations commonly used; however, refer to the IES position on LED Product Lifetime Prediction, IES PS-10-18, that explains proper use of IES TM-21 and LM-80.

LUMEN MULTIPLIER

Ambient Temperature	SA1 (All Drive Currents)
0 °C	1.02
10 °C	1.01
25 °C	1.00
40 °C	0.99
50 °C	0.97

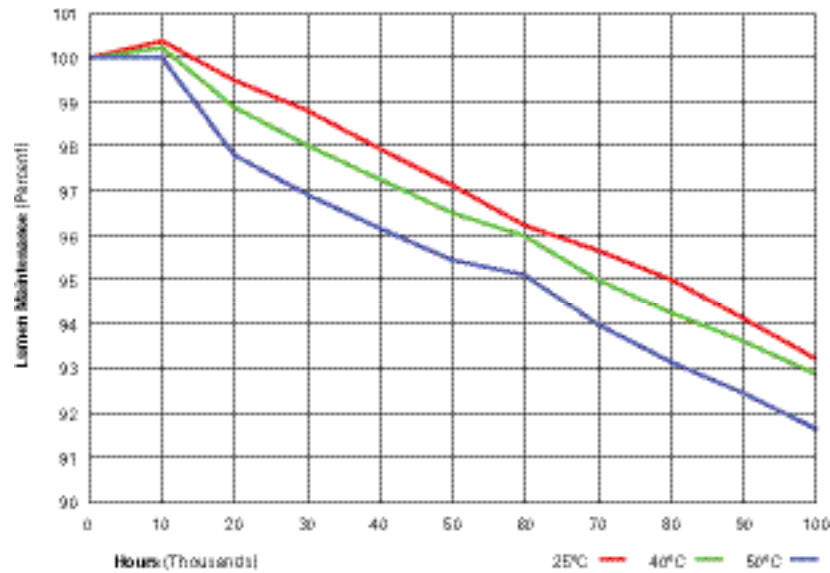

CONTROL OPTIONS

0-10V

This fixture is offered standard with 0-10V dimming driver(s). The DIM option provides 0-10V dimming wire leads for use with a lighting control panel or other control method.

Photocontrol (BPC)




Optional button-type photocontrol (BPC) and photocontrol receptacles (PR and PR7) provide a flexible solution to enable “dusk-to-dawn” lighting by sensing light levels. Advanced control systems compatible with NEMA 7-pin standards can be utilized with the PR7 receptacle.

After Hours Dim (AHD)

This feature allows photocontrol-enabled luminaires to achieve additional energy savings by dimming during scheduled portions of the night. The dimming profile will automatically take effect after a “dusk-to-dawn” period has been calculated from the photocontrol input. Specify the desired dimming profile for a simple, factory-shipped dimming solution requiring no external control wiring. Reference the After Hours Dim supplemental guide for additional information.

Dimming Occupancy Sensor (MS/DIM-LXX and MS-LXX)

These sensors are factory installed in the luminaire housing. When the SPB or MS/DIM sensor options are selected, the occupancy sensor is connected to a dimming driver and the entire luminaire dims when there is no activity detected. When activity is detected, the luminaire returns to full light output. The MS/DIM sensor is factory preset to dim down to approximately 50 percent power with a time delay of five minutes. The MS-LXX sensor is factory preset to turn the luminaire off after five minutes of no activity. SPB motion sensors require the Sensor Configuration mobile application by Wattstopper to change factory default dimming level, time delay, sensitivity and other parameters. Available for iOS and Android devices. The SPB sensor is factory preset to dim down to approximately 10% power with a time delay of five minutes. The MS/DIM occupancy sensors require the FSIR-100 programming tool to adjust factory defaults.

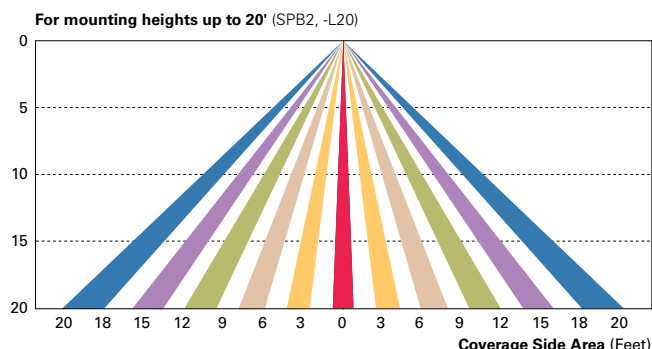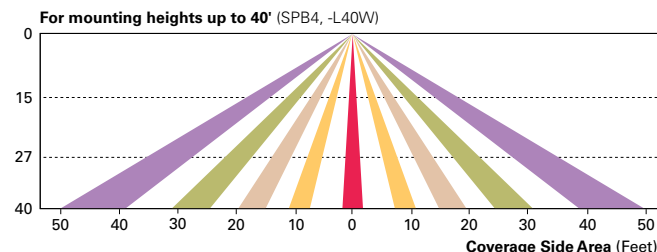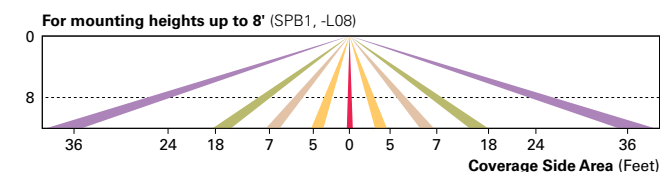

WaveLinx Wireless Control and Monitoring System

Available in 7-PIN or 4-PIN configurations, the WaveLinx Outdoor control platform operates on a wireless mesh network based on IEEE 802.15.4 standards enabling wireless control of outdoor lighting. Use the WaveLinx Mobile application for set-up and configuration. At least one Wireless Area Controller (WAC) is required for full functionality and remote communication (including adjustment of any factory pre-sets). WaveLinx Outdoor Control Module (WOLC-7P-10A) A photocontrol that enables astronomic or time-based schedules to provide ON, OFF and dimming control of fixtures utilizing a 7-PIN receptacle. The out-of-box functionality is ON at dusk and OFF at dawn. WaveLinx Wireless Sensor (SWPD4 and SWPD5) These outdoor sensors offer passive infrared (PIR) occupancy and a photocell for closed loop daylight sensing. These sensors can be factory installed or field-installed via simple, tool-less integration into luminaires equipped with the Zhaga Book 18 compliant 4-PIN receptacle (ZW). These sensors are factory preset to dim down to approximately 50 percent power after 15 minutes of no activity detected. These occupancy sensors include an integral photocell for “dusk-to-dawn” control or daylight harvesting that is factory-enabled. A variety of sensor lenses are available to optimize the coverage pattern for mounting heights from 7'-20', only applies for typical wall packs.

EXHIBIT C: Photos



